




X **DEEP**
LEARN

GATE | PSUs

ELECTRICAL ENGINEERING

Signals & Systems

Text Book: Theory with worked out Examples
and Practice Questions

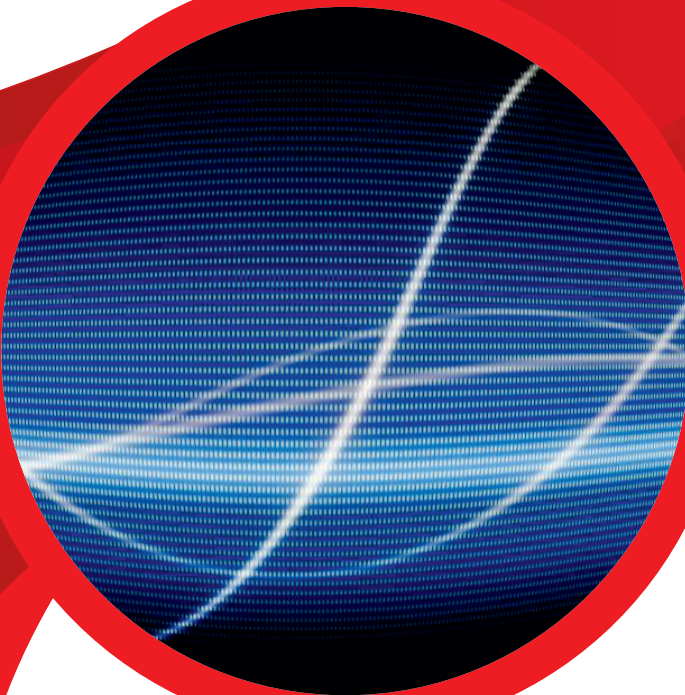

Hyderabad | Delhi | Pune | Bhubaneswar | Lucknow | Bengaluru | Chennai
Vijayawada | Vizag | Tirupati | Ahmedabad | Kolkata

Chapter 1

Introduction

(Solutions for Text Book Practice Questions)

01. Ans: (c)

Sol: The maximum value of

A. $x(n) + 2x(-n) = \{-1, -1, 3, 1, 1\}$ is 3

The maximum value of

B. $5x(n)x(n-1) = \{0, 5, 5, -5, 5, 0\}$ is 5

The maximum value of

C. $x(n)x(-n-1) = \{0, -1, 1, 1, -1, 0\}$ is 1




The maximum value of

D. $4x(2n) = \{4, 4, -4\}$ is 4

$B > D > A > C$

02. Ans: (a)

Sol:



Non zero duration = 6

03.

Sol: Sifting property of impulse is

$$\int_{t_1}^{t_2} x(t) \delta(t - t_0) dt = x(t_0) \quad t_1 \leq t_0 \leq t_2$$

= 0 other wise

(a) $t_0 = 4$ is out of the limit so value = 0

(b) $(t + \cos \pi t)|_{t=1} = 0$


(c) $\cos t u(t-3)|_{t=0} = 1u(-3) = 0$

(d) $\frac{1}{2} e^{t-2} \Big|_{t=2} = \frac{1}{2}$

(e) $t \sin t \Big|_{t=\frac{\pi}{2}} = \frac{\pi}{2}$

04.

Sol: $x(n) = 1 - [\delta(n-4) + \delta(n-5) + \dots]$

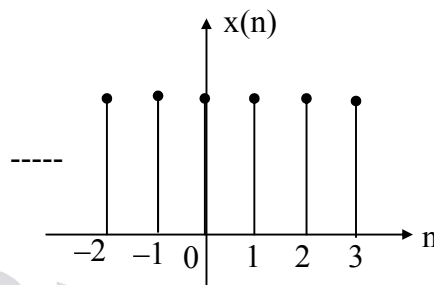

$x(n) = u(-n+3) = u(Mn - n_0)$


$M = -1$

$n_0 = -3$


05.

Sol:

(a)



(b)

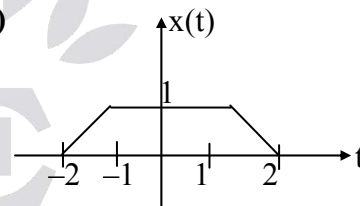

06.

Sol: (a) as $t \rightarrow \infty$, amp $\rightarrow 0$, Energy signal

(b) Constant amp – Power signal

(c) Power + energy = Power signal

(d) Periodic signal $\rightarrow$ Power signal

(e) as $t \rightarrow \infty$, amp $\rightarrow \infty$, NENP

(f) as $t \rightarrow \infty$, amp $\rightarrow \infty$, NENP

07.

Sol:

(i)

$$E_{x_1(n)} = \sum_{n=-\infty}^{\infty} |x_1(n)|^2 = \sum_{n=0}^{\infty} (\alpha(0.5)^n)^2 = \sum_{n=0}^{\infty} \alpha^2 (0.25)^n$$

$$= \alpha^2 \sum_{n=0}^{\infty} (0.25)^n = \frac{\alpha^2}{1-0.25} = \frac{\alpha^2}{0.75}$$

$$E_{x_2(n)} = \sum_{n=-\infty}^{\infty} |x_2(n)|^2 = 1.5 + 1.5 = 3$$

$$\text{Given } E_{x_1(n)} = E_{x_2(n)}$$

$$\frac{\alpha^2}{0.75} = 3$$

$$\alpha^2 = 2.25$$




$$\alpha = 1.5$$

(ii) Ans: (a)

$$\text{Sol: } x_1(t) = |t|; -1 \leq t \leq 1$$

$$x_2(t) = 1 - |t|; -1 \leq t \leq 1$$

$$T = 0.25 \text{ secs}$$

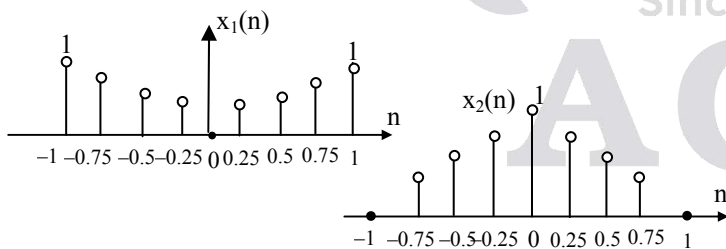

$$\text{Energy in } x(n) = \sum_{n=-\infty}^{\infty} |x(n)|^2$$

Energy of the first signal

$$= 2(1^2 + 0.75^2 + 0.5^2 + 0.25^2)$$

$$= 3.75$$

Energy of the secondary signal

$$= 1 + 2(0.75^2 + 0.5^2 + 0.25^2)$$

$$= 2.75$$

$$E_{x_1(n)} > E_{x_2(n)}$$


08.

$$\text{Sol: } x_{oc}(n) = \frac{x(n) - x^*(-n)}{2}$$

$$= \left[\frac{1+j7}{2}, 0, \frac{-1+j7}{2} \right]$$

09.

Sol:

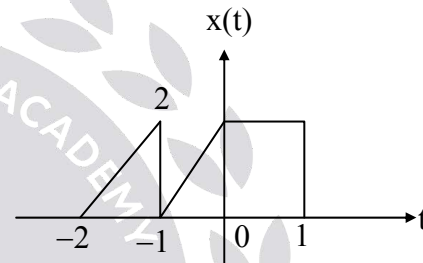

10.

$$\text{Sol: (a) } T_1 = \frac{1}{9}, T_2 = \frac{1}{6}$$

$$\frac{T_1}{T_2} = \frac{2}{3} \text{ LCM} = 3$$

$$T_0 = \text{LCM} \times T_1 = 1/3$$

$$\text{(b) } T_1 = \frac{15}{11}, T_2 = 15$$

$$\frac{T_1}{T_2} = \frac{1}{11}$$

$$\text{LCM} = 11$$

$$T_0 = \text{LCM} \times T_1 = 15$$

$$\text{(c) } T_1 = \frac{2\pi}{3}, T_2 = \frac{2}{5}$$

$$\frac{T_1}{T_2} = \frac{5\pi}{3} \text{ irrational number}$$

So a non-periodic.



DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

$$(d) \quad T_0 = \frac{2\pi}{10} = \frac{\pi}{5}$$

(e) It is extending from 0 to ∞
So non-periodic

$$(f) \quad x_e(t) = \frac{x(t) + x(-t)}{2} = \frac{1}{2} \cos 2\pi t$$

$$T_0 = \frac{2\pi}{\omega_0} = \frac{2\pi}{2\pi} = 1$$

(g) $\frac{\omega_0}{2\pi} = \frac{5}{6}$ - rational, so periodic

$$N_0 = \frac{2\pi}{\omega_0} m = \frac{6}{5} m$$

$$N_0 = 6$$

(h) $N_1 = 8m \Rightarrow N_1 = 8$

$$N_2 = 16m \Rightarrow N_2 = 16$$

$$N_3 = 4m \Rightarrow N_3 = 4$$

$$\frac{N_1}{N_2} = \frac{1}{2}, \frac{N_1}{N_3} = 2$$

$$\text{LCM} = 2$$

$$N_0 = \text{LCM} \times N_1 = 16$$



(i) $\frac{\omega_0}{2\pi} = \frac{7}{2}$ - rational, so periodic

$$N_o = \frac{2\pi}{\omega_0} m = \frac{2}{7} m$$

$$N_0 = 2$$

(j) multiplication of one periodic & non-periodic is non-periodic

(k) $u(n) + u(-n) = 1 + \delta(n)$ is non-periodic

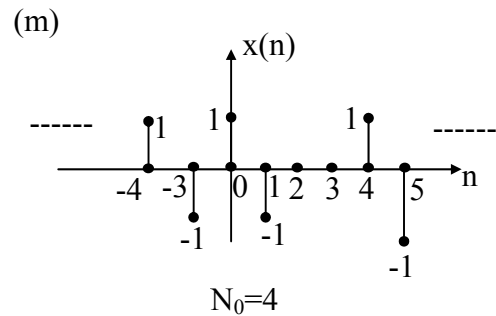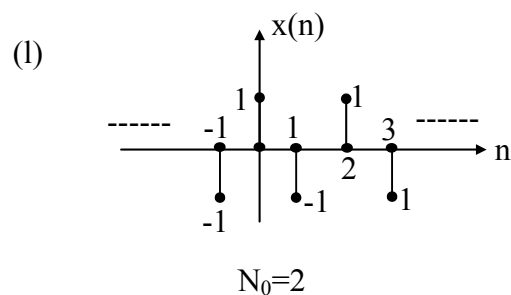

11.
Sol:

$$\begin{aligned} \text{(A)} \quad x(nT_s) &= 2\cos(150 \times \pi \times n \times T_s + 30^\circ) \\ &= 2\cos\left(\frac{3\pi}{4}n + 30^\circ\right) \end{aligned}$$

$$\omega_0 = \frac{3\pi}{4}$$

$$N_0 = \frac{2\pi}{\omega_0} m = \frac{8}{3} m$$

$$N_0 = 8$$

(B) Ans: (a)

$$N_1 = \frac{2}{3}m \Rightarrow N_1 = 2$$

$$N_2 = \frac{2}{7}m \Rightarrow N_2 = 2$$

$$N_3 = \frac{20}{25}m \Rightarrow N_3 = 4$$

$$\frac{N_1}{N_2} = 1, \frac{N_1}{N_3} = \frac{1}{2}, \text{LCM} = 2$$

$$N_0 = \text{LCM} \times N_1 = 4$$

$$\omega_0 = \frac{2\pi}{4} = \frac{\pi}{2}$$

$$x(n) = \cos(6\omega_0 n) + \sin(14\omega_0 n) + \cos(5\omega_0 n)$$

so 14th harmonic.

12.

Sol: (a) $[x_1(t) + x_2(t)] [x_1(t-2) + x_2(t-2)]$

$$\neq x_1(t)x_1(t-2)+x_2(t)x_2(t-2)$$

is non linear

(b) $\sin[x_1(t) + x_2(t)] \neq \sin[x_1(t)] + \sin[x_2(t)]$
 is non linear

(c) $\frac{d}{dt}[\alpha x_1(t) + \beta x_2(t)] = \frac{\alpha dx_1(t)}{dt} + \frac{\beta dx_2(t)}{dt}$
 is linear

(d) $2[x_1(t) + x_2(t)] + 3 \neq 2[x_1(t) + x_2(t)] + 6$
 is non linear

(e) $\int_{-\infty}^t [\alpha x_1(\tau) + \beta x_2(\tau)] d\tau$
 $= \alpha \int_{-\infty}^t x_1(\tau) d\tau + \beta \int_{-\infty}^t x_2(\tau) d\tau$ is linear

(f) $[x_1(t) + x_2(t)]^2 \neq x_1^2(t) + x_2^2(t)$
 is non linear

(g) $[\alpha x_1(t) + \beta x_2(t)] \cos \omega_0 t$
 $= \alpha x_1(t) \cos \omega_0 t + \beta x_2(t) \cos \omega_0 t$ is linear

(h) $\log[x_1(n) + x_2(n)] \neq \log[x_1(n)] + \log[x_2(n)]$
 is non linear

(i) $|x_1(n) + x_2(n)| \neq |x_1(n)| + |x_2(n)|$
 is non linear

(j) $\alpha * x^*(n) \neq \alpha x^*(n)$ is non linear

(k) non linear (median is a non linear operator)

(l) $\frac{x_1(n) + x_2(n)}{x_1(n-1) + x_2(n-1)} \neq \frac{x_1(n)}{x_1(n-1)} + \frac{x_2(n)}{x_2(n-1)}$
 is non linear

(m) linear (no non linear operator is present)

(n) $e^{x_1(n) + x_2(n)} \neq e^{x_1(n)} + e^{x_2(n)}$ is non linear

13.

Sol: (a) $tx(t - t_0) + 3 \neq (t - t_0)x(t - t_0) + 3$
 time variant

(b) $e^{x(t-t_0)} = e^{x(t-t_0)}$ time invariant

(c) $x(t - t_0) \cos 3t \neq x(t - t_0) \cos 3(t - t_0)$
 time variant

(d) $\sin [x(t-t_0)] = \sin [x(t-t_0)]$ time invariant

(e) $\frac{d[x(t - t_0)]}{d(t - t_0)} = \frac{dx(t - t_0)}{dt - dt_0} = \frac{d}{dt} [x(t - t_0)]$
 time invariant

(f) $x^2(t - t_0) = x^2(t - t_0)$ time invariant

(g) $x(2t - t_0) \neq x(2t - 2t_0)$ time variant

(h) $2^{x(n-n_0)} x(n - n_0) = 2^{x(n-n_0)} x(n - n_0)$
 time invariant

(i) time variant (time reversal operation is time variant)

(j) time variant (coefficient is time variable)

(k) all coefficients are constant
 - time invariant

14.

Sol: $x_2(t) = x_1(t) - x_1(t-2)$

$y_2(t) = y_1(t) - y_1(t-2)$

$x_3(t) = x_1(t+1) + x_1(t)$

$y_3(t) = y_1(t+1) + y_1(t)$

15.

Sol: (a) Preset output depends on present input-causal

(b) preset output depends on present input-causal

(c) preset output depends on present input-causal



**X DEEP
LEARN**

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

- (d) preset output depends on future input - non causal ($y(-\pi) = x(0)$)
- (e) preset output depends on present input - causal
- (f) preset output depends on present input - causal
- (g) $n > n_0$ causal, $n < n_0$ non-causal
- (h) non - causal (present output depends on future input)
- (i) $y(0) = \sum_{k=-\infty}^0 x(k)$ present output depends on present input - causal
- (j) $y(-1) = \sum_{k=0}^{-1} x(k)$ future input non causal
- (k) non-causal for any value of 'm'
- (l) $\alpha = 1$ causal, $\alpha \neq 1$ non causal
- (m) causal (present output depends on past inputs)
- (n) non causal (present output depends on future input)

16.

- Sol:**
- (a) present output depends on present input - static
 - (b) present output depends on present input - static
 - (c) present output depends on present input - static
 - (d) present output depends on present input - static
 - (e) $y(1) = x(3)$ present output depends on future input - dynamic
 - (f) dynamic (differentiation operation is dynamic)
 - (g) present output depends on past input - dynamic

17.

Sol: If a system expressed with differential equation then it is dynamic.

The coefficients of differential equation are function of time then it is time variant.

- (a) linear, time variant, dynamic
- (b) linear, time invariant, dynamic
- (c) linear, time invariant, dynamic
- (d) non linear, time variant, dynamic

18.

Sol: If a system expressed with differential equation then it is dynamic.

The coefficients of differential equation are function of time then it is time variant.

- (a) linear, time invariant, dynamic (a→2)
- (b) non linear, time variant, static (b→5)
- (c) linear, time variant, dynamic (c→1)
- (d) nonlinear, time invariant, dynamic (d→4)

19.

Sol: (a) $y(t) = u(t) \cdot u(t) = u(t)$ - stable

(b) $y(t) = \cos 3t u(t) \Rightarrow -1 < y(t) < 1$ stable

(c) $y(t) = u(t-3)$ stable

(d) $y(t) = \frac{du(t)}{dt} = \delta(t)$ unstable

(e) $y(t) = \int_{-\infty}^t u(\tau) d\tau \Rightarrow r(t)$ is unstable

(f) $\sin(\text{finite}) = \text{finite}$. stable

(g) $y(t) = tu(t) = r(t)$ unstable

(h) $y(n) = e^{\text{finite}} = \text{finite}$ stable

(i) $y(n) = u(3n)$ bounded stable

(j) $x(n) = 1 \Rightarrow y(n) = n - n_0 + 1 \Rightarrow y(\infty) = \infty \Rightarrow$ unstable

20.

Sol: Two different inputs produces same output then it is non invertible.

Two different inputs produces two different outputs then it is invertible.

(a) $x_1(t) = u(t) \Rightarrow y_1(t) = u(t)$

$x_2(t) = -u(t) \Rightarrow y_2(t) = u(t)$

So, non invertible

(b) $x_1(t) = u(t) \Rightarrow y_1(t) = u(t)$

$x_2(t) = -u(t) \Rightarrow y_2(t) = u(t)$

So, non invertible

(c) $x_1(t) = u(t) \Rightarrow y_1(t) = u(t-3)$

$x_2(t) = -u(t) \Rightarrow y_2(t) = -u(t-3)$

So, invertible

(d) $x_1(t) = A \Rightarrow y_1(t) = 0$

$x_2(t) = -A \Rightarrow y_2(t) = 0$

So, non invertible

(e) $x_1(n) = \delta(n) \Rightarrow y_1(n) = 0$

$x_2(n) = -\delta(n) \Rightarrow y_2(n) = 0$

So, non invertible

(f) $x_1(n) = \delta(n) \Rightarrow y_1(n) = 0$

$x_2(n) = -\delta(n) \Rightarrow y_2(n) = 0$

So, non invertible

(g) So, non invertible


(h) $x_1(n) = \delta(n) \Rightarrow y_1(n) = u(n)$

$x_2(n) = -\delta(n) \Rightarrow y_2(n) = -u(n)$


So, invertible

21.

Sol: Given

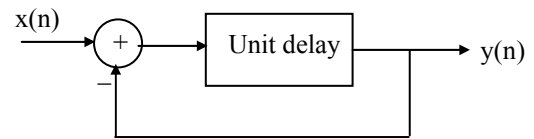

Convert to Z-domain

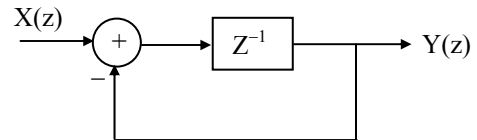

$$\frac{Y(z)}{X(z)} = \frac{z^{-1}}{1 + z^{-1}} = \frac{1}{z + 1}$$

(i) $x(n) = \delta(n)$;

$$\Rightarrow Y(z) = \frac{1}{z + 1} X(z)$$

$$Y(z) = \frac{1}{z + 1} \cdot 1 = \frac{1}{z + 1}$$

$$Y(z) = z^{-1} \frac{z}{z + 1}$$

Taking inverse Z – transform

$$y(n) = (-1)^{n-1} u(n-1)$$

if $n = 0, 1, 2, 3, \dots$

Then $y(n) = [0, 1, -1, 1, -1, \dots]$

(ii) $x(n) = u(n)$;

$$\Rightarrow Y(z) = \frac{1}{z + 1} X(z)$$

$$Y(z) = \frac{1}{z + 1} \frac{z}{z - 1}$$

$$\frac{Y(z)}{z} = \frac{1}{(z + 1)(z - 1)} = \frac{A}{z + 1} + \frac{B}{z - 1}$$

$$= \frac{-\frac{1}{2}}{z + 1} + \frac{\frac{1}{2}}{z - 1}$$

$$Y(z) = -\frac{1}{2} \frac{z}{z+1} + \frac{1}{2} \frac{z}{z-1}$$

$$y(n) = -\frac{1}{2}(-1)^n u(n) + \frac{1}{2} u(n)$$

22. Ans: (b)

Sol: Constant added - non linear

So, statement-I is true.

Time varying term - time variant

So, statement-II is true.

Both Statement I and Statement II are individually true but Statement II is not the correct explanation of Statement I

23. Ans: (d)

Sol: (S-I): $y(n) = 2x(n) + 4x(n-1)$

If $x(n)$ is bounded, $y(n)$ is bounded.

$\therefore$ Stable. (S-I) is false.

(S-II): $h(n) = 2\delta(n) + 4\delta(n-1)$

$$h(n) = \{ 2, 4 \}$$

↑

Impulse response $h(n)$ has only two finite nonzero samples. This is the condition for stability.

$\therefore$ (S-II) is True.

Statement I is false but Statement II is true

24. Ans: (a)

Sol: A system is memory less if output, $y(t)$ depends only on $x(t)$ and not on past or future values of input, $x(t)$.

A system is causal if the output, $y(t)$ at any time depends only on values of input, $x(t)$ at that time and in the past.

Both (S-I) and (S-II) are true and (S-II) is the correct explanation of (S-I).


Both Statement I and Statement II are individually true and Statement II is the correct explanation of Statement I.

Chapter 2 LTI (LSI) Systems

01.

Sol:

$$(a) y(t) = \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau$$

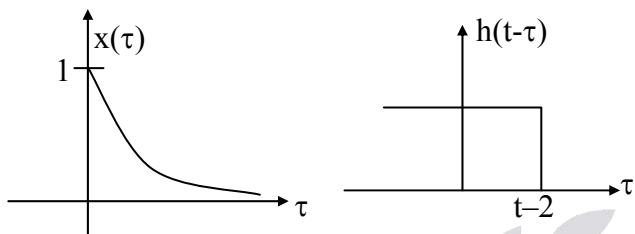


Case (i) $t-2 < 0$ $y(t) = 0, t < 2$

$$\text{Case (ii) } t-2 > 0 \quad y(t) = \int_0^{t-2} e^{-3\tau} d\tau = \frac{1-e^{-3(t-2)}}{3}, t > 2$$

$$y(t) = \frac{1-e^{-3(t-2)}}{3} u(t-2)$$

(b)

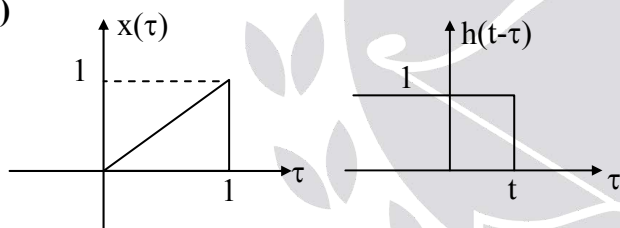

Case (i) $t < 0$ $y(t) = 0$


$$\text{Case (ii) } 0 < t < 1 \quad y(t) = \int_0^t \tau d\tau = \frac{t^2}{2}$$

$$\text{Case (iii) } t > 1 \quad y(t) = \int_0^1 \tau d\tau = \frac{1}{2}$$

02. Ans: 0.5

$$\text{Sol: } x(t) * h(t) = \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau = y(t)$$


$$y(2) = \int_{-\infty}^{\infty} x(\tau)h(2-\tau)d\tau$$

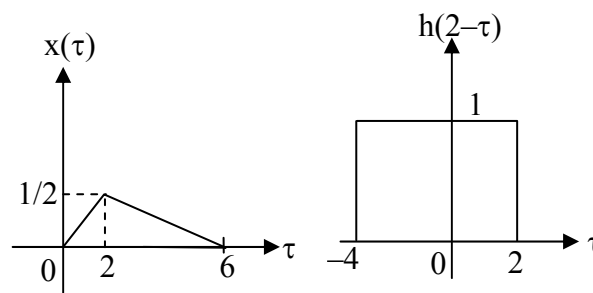

$$y(2) = \int_0^2 \left(\frac{\tau}{4}\right) \cdot 1 d\tau = \frac{\tau^2}{8} \Big|_0^2 = \frac{1}{2}$$

03.

Sol:

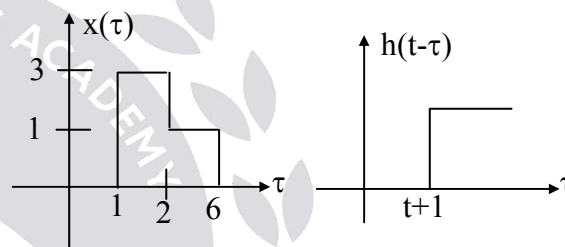

$$y(4) = \int_1^5 1 d\tau = 1$$

$$y\left(\frac{1}{2}\right) = \int_{1.5}^6 x(\tau)h\left(\frac{1}{2}-\tau\right)d\tau = \frac{3}{2} + 4 = 5.5$$

04. Ans: (b)

$$\text{Sol: } s(t) = \int_{-\infty}^t h(\tau)d\tau = u(t-1) + u(t-3)$$

$$s(2) = 1$$

05.

Sol: Assume $-\tau + a = \lambda \Rightarrow -d\tau = d\lambda$

$$z(t) = \int_{-\infty}^{\infty} x(\lambda)h(t+a-\lambda)d\lambda = y(t+a)$$

06.

Sol: (a) $x(t-7+5) = x(t-2)$

$$(b) x(t) * \frac{1}{|a|} \delta\left(t + \frac{b}{a}\right) = \frac{1}{|a|} x\left(t + \frac{b}{a}\right)$$

$$(c) x(t) * [2\delta(t+3) + 2\delta(t-3)] = 2x(t+3) + 2x(t-3)$$



X DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

07.

Sol:

$$(a) e^{-1}u(1)\delta(t-1) = e^{-1}\delta(t-1)$$


[From product property]

$$(b) e^{-t} \Big|_{t=1} = e^{-1} \text{ [From sifting property]}$$

$$(c) e^{-(t-1)}u(t-1) \text{ [From convolution property]}$$

08.

Sol:

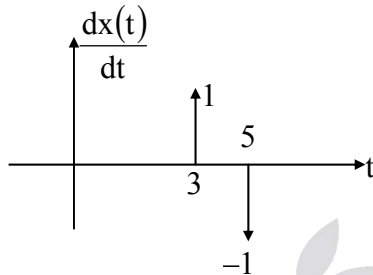

$$\frac{dx(t)}{dt} = \delta(t-3) - \delta(t-5)$$

$$\frac{dx(t)}{dt} * h(t) = h(t-3) - h(t-5)$$

09.

Sol: (a) $A_x A_h = A_y$,

$$\int_{-\infty}^{\infty} \delta(\alpha t) dt = \frac{1}{\alpha}$$

$$\frac{1}{\alpha} \cdot \frac{1}{\alpha} = \frac{A}{\alpha}$$

$$A = \frac{1}{\alpha}$$

(b) $\frac{1}{\alpha} \cdot \frac{1}{\alpha} = \frac{A}{\alpha}$,

$$\int_{-\infty}^{\infty} \sin c(\alpha t) dt = \frac{1}{\alpha}$$

$$A = \frac{1}{\alpha}$$

(c) $1 \times 1 = A\sqrt{2}$

$$\int_{-\infty}^{\infty} e^{-at^2} dt = 1$$

$$A = \frac{1}{\sqrt{2}}$$



(d) $\pi \times \pi = 2A\pi$

$$\int_{-\infty}^{\infty} \frac{1}{1+t^2} dt = \pi$$



$$A = \frac{\pi}{2}$$

10.

Sol: (i) $T = 4$

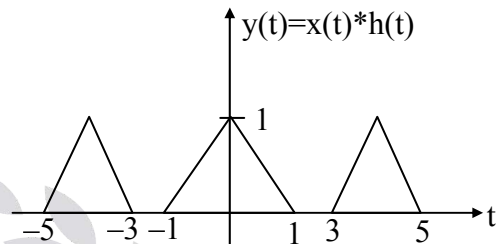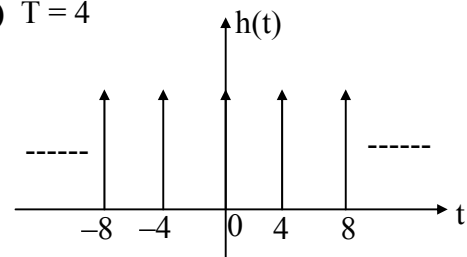


(ii) $T = 2$

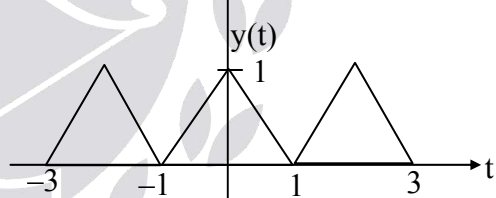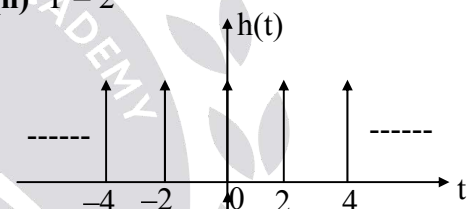

11.

Sol:

(a)

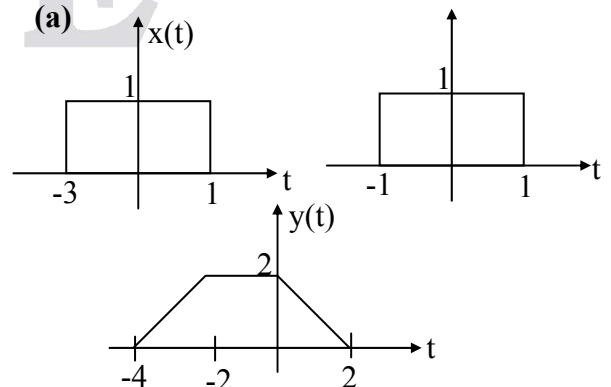


(b) Ans: (c)

$$tu(t) * u(t-1) \leftrightarrow \frac{1}{s^2} \frac{e^{-s}}{s}$$

$$= \frac{e^{-s}}{s^3} \leftrightarrow \frac{1}{2} (t-1)^2 u(t-1)$$

(c)



$$h(t) = \frac{1}{T} [u(t) - u(t-T)]$$

$$x(t) = u(t)$$

$$y(t) = x(t) * h(t) = \frac{1}{T} [r(t) - r(t-T)]$$


12. Ans: (a)

Sol: To get three discontinuities in $y(t)$ both rectangular pulse must be same width. To get equal width $h(t) = x(t)$. It is possible only

$$\alpha = 1$$

13. Ans: (a)

Sol:

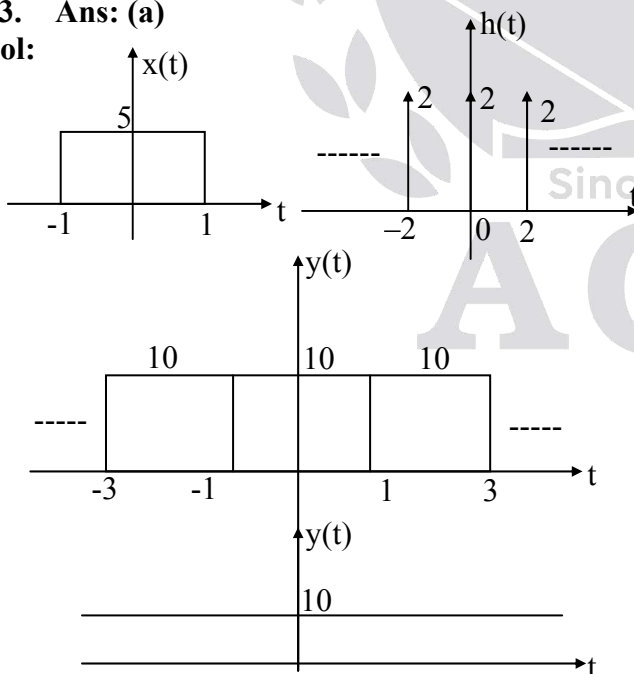

$$y(t) = 10 \text{ for all 't'}$$

14. Ans: (d)

$$\text{Sol: } x(t) * h(-t) = \int_{-\infty}^{\infty} x(\tau) h(-(t-\tau)) d\tau$$

$$= \int_{-\infty}^{\infty} x(\tau) h(\tau-t) d\tau$$

15.

$$\text{Sol: } y(n) = \dots + x(-2)g(n+4) + x(-1)g(n+2) + x(0)g(n) + x(1)g(n-2) + x(2)g(n-4) + \dots$$

$$x(n) = \delta(n-2) = 1 \quad n=2$$

$$= 0 \quad \text{otherwise}$$

$$y(n) = g(n-4)$$

16.

$$\text{Sol: } y(n) = x(n) * h(n)$$

$$= 2(0.5)^n u(n) + (0.5)^{n-3} u(n-3)$$

$$y(1) = 1, y(4) = 5/8$$

17. Ans: (a)

$$\text{Sol: } y(n) = [a, b, c, d, a, b, c, d, \dots \text{ N times}]$$

$y(n)$ is a periodic function with periodic '4'.

$$\text{So } h(n) \text{ must be } h(n) = \sum_{i=0}^{N-1} \delta(n-4i)$$

18. Ans: 31

$$\text{Sol: } x(n) = \{1, 2, 1\}$$

$$h(n) = \{1, x, y\}$$

$$y(n) = x(n) * h(n)$$

	1	x	y
1	1	x	y
2	2	2x	2y
1	1	x	y

$$y(n) = \{1, 2+x, 2x+y+1, x+2y, y\}$$

$$y(1) = 3 = 2+x \Rightarrow x = 1$$

$$y(2) = 4 = 2x+y+1 \Rightarrow y = 1$$

$$y(n) = \{1, 3, 4, 3, 1\}$$

$$10 y(3) + y(4) = 10 \times 3 + 1 = 31$$

19. Ans: (d)

$$\text{Sol: } \sum_{n=-\infty}^{\infty} h(n) = \sum_{n=0}^{\infty} a^n + \sum_{n=-\infty}^{-1} b^n < \infty$$

only when $|a| < 1$, $|b| > 1$

20. Ans: (b)

$$\text{Sol: } \int_{-\infty}^{\infty} |h(t)| dt = \int_{-\infty}^0 e^{\alpha t} dt + \int_0^{\infty} e^{\beta t} dt < \infty \quad \text{only when}$$

$\alpha < 0$, $\beta > 0$

21.

$$\text{Sol: (a)} \quad h(n) = \alpha^n u(n) + \beta \alpha^{n-1} u(n-1)$$

$$\text{(b)} \quad h(n) = 0 \quad n < 0 \quad \text{causal}$$

System stable for any value of ' β '

except $\beta \neq \infty$ and $|\alpha| < 1$, except $\alpha = 0$

22.

$$\text{Sol: (a)} \quad \left(\frac{1}{5}\right)^n u(n) - A \left(\frac{1}{5}\right)^{n-1} u(n-1) = \delta(n)$$

When $n=1$, $A = 1/5$

$$\text{(b)} \quad H(z) = \frac{1}{1 - \frac{1}{5}z^{-1}}$$

$$H_{\text{inv}}(z) = 1 - \frac{1}{5}z^{-1}$$

$$g(n) = \delta(n) - \frac{1}{5}\delta(n-1)$$

23.

$$\text{Sol: } h_1(n) = \delta(n) - \frac{1}{2}\delta(n-1)$$

$$\begin{aligned} h_1(n) * h_2(n) &= \left(\frac{1}{2}\right)^n u(n) - \frac{1}{2} \left(\frac{1}{2}\right)^{n-1} u(n-1) \\ &= \left(\frac{1}{2}\right)^n \delta(n) = \delta(n) \end{aligned}$$

24.

Sol: 1. The convolution of one causal, one-non causal system is may be causal or non-causal. So, given statement is False.

2. $h(t) = e^{2t}u(t-1)$ is causal, un stable
So, given statement is false.

3. $h(t) = \sin \omega_0 t$, $\int_{-\infty}^{\infty} |h(t)| dt = \int_{-\infty}^{\infty} |\sin \omega_0 t| dt = \infty$
unstable. So, given statement is true

4. $y(t) = x(t-2) \rightarrow$ causal

$x(t) = y(t+2) \rightarrow$ non causal.
So, given statement is false

25. Ans: (a)

$$\text{Sol: } s(t) = u(t) - e^{-\alpha t}u(t)$$

$$\begin{aligned} h(t) &= \frac{ds(t)}{dt} = \delta(t) - [e^{-\alpha t}\delta(t) - \alpha e^{-\alpha t}u(t)] \\ &= \alpha e^{-\alpha t}u(t) \end{aligned}$$

26.

$$\text{Sol: } s(n) = \sum_{k=-\infty}^n h(k) = \sum_{k=-\infty}^n \left(\frac{1}{2}\right)^k u(k)$$

$$= \sum_{k=0}^n \left(\frac{1}{2}\right)^k \quad n \geq 0$$

$$= 0 \quad n < 0$$

$$s(n) = 2 \left[1 - \left(\frac{1}{2}\right)^{n+1} \right] u(n)$$

27.

$$\text{Sol: } x(n) = u(n), y(n) = \delta(n)$$

$$u(n) - u(n-1) = \delta(n)$$

$$y(n) = x(n) - x(n-1)$$



DEEP
LEARN

Deep Learn - India's Best Online Coaching Platform for GATE, ESE, and PSUs

Enjoy a smooth online learning experience in various languages at your convenience

$$\begin{aligned}
 x(n) &= nu(n) \\
 y(n) &= nu(n) - nu(n-1) + u(n-1) \\
 &= n\delta(n) + n(n-1) \\
 &= u(n-1)
 \end{aligned}$$

$$\begin{aligned}
 s_c(t) &= s'(t) * s_2(t) \\
 &= s_1(t) * s'_2(t) \\
 s_c(t) &\neq s_1(t) * s_2(t)
 \end{aligned}$$

28.

Sol: $h_c(t) = h_1(t) * h_2(t)$

$$\begin{aligned}
 \int_{-\infty}^t h_c(\tau) d\tau &= \int_{-\infty}^t h_1(\tau) d\tau * h_2(\tau) \\
 &= h_1(\tau) * \int_{-\infty}^t h_2(\tau) d\tau
 \end{aligned}$$



Chapter 3

Fourier Series

01. Ans: Zero

Sol: $T_1 = \frac{\pi}{2}, T_2 = \frac{\pi}{6}$

$$\frac{T_1}{T_2} = 3, T_0 = \text{LCM} \times T_1 = \frac{\pi}{2}$$

$$\omega_0 = 4$$

$$x(t) = 3\sin(\omega_0 t + 30^\circ) - 4\cos(3\omega_0 t - 60^\circ)$$

second harmonic amplitude = 0

02. Ans: (d)

Sol: (a) Given signal is periodic.

So, fourier series exists

(b) Given signal is periodic.

So, fourier series exists.

(c) Given signal is periodic.

So, fourier series exists.

(d) Given signal is non-periodic.

So, fourier series does not exists.

03.

Sol:

(P) Ans: (b)

Hidden symmetry a_0, b_n exists

(Q) Ans: (b)

Half wave symmetry a_n, b_n exists with odd harmonics

(R) Ans: (b)

Odd symmetry & HWS $\rightarrow$ sine terms with odd 'n'

(S) Ans: (c)

Even and odd HWS $\rightarrow a_0$, cosine with odd 'n'

(T) Ans: (d)

$a_0 = 0$ (because average value = 0)

Even & HWS as cosine with odd 'n'

04. Ans: (b)

Sol: $f_1 = 5\text{Hz}, f_2 = 15\text{Hz}$

The signal lying with in the frequency band

$$10\text{Hz to } 20\text{ Hz is } 4\sin\left(30\pi t + \frac{\pi}{8}\right)$$

$$p = \frac{(4)^2}{2} = 8 \text{ Watts}$$

05. Ans: (b)

Sol: At $\omega_0 t = \pi/2$

$$x(t) = 1 - \frac{1}{3} + \frac{1}{5} - \frac{1}{7} + \dots$$

$$= \tan^{-1}(1) = \frac{\pi}{4}$$

06. Ans: (c)

Sol: $\omega = \frac{2\pi}{T}(2k), k = 1, 2, \dots$

The above frequency terms are absent.

The above frequency contains even harmonics and also gives that sin terms are absent. only cosine terms are present

Finally odd harmonics with cosine terms are present so, $x(t)$ it is a even and halfwave so,

$$x(t) = x(T-t) \text{ even}$$

$$x(t) = -x(t-T/2) \text{ halfwave}$$

07. Ans: (a)

Sol: $T_1 = 1, T_2 = 10\pi, T_3 = 8\pi, T_4 = \frac{20}{3}\pi$

$$T_0 = 40\pi$$

$$\omega_0 = \frac{2\pi}{T_0} = 0.05\text{rad/sec}$$



X DEEP
LEARN

Deep Learn - India's Best Online Coaching Platform for GATE, ESE, and PSUs

Enjoy a smooth online learning experience in various languages at your convenience

08. Ans: (a)

$$\text{Sol: Average value} = \frac{\frac{1}{2}(2)(1) + (1)(1) + (1)(3)}{6} = \frac{5}{6}$$

09. Ans: (a)

$$\text{Sol: } a_0 = \frac{1}{2\pi} \int_0^{2\pi} f(t) dt$$

$$a_0 = \text{Average value} = 0$$

10. Ans: (d)

$$\text{Sol: } T_0 = 4 \text{ msec } f_0 = \frac{1}{T_0} = 250 \text{ Hz}$$

$$5 f_0 = 1250 \text{ Hz}$$

11. Ans: (b)

Sol: Odd + HWS $\rightarrow$ sine terms with odd harmonics

12. Ans: (a)

$$\text{Sol: } (\text{RMS})^2 = \frac{1}{T} \int_0^T x^2(t) dt$$

$$= \frac{1}{T} \left[\int_0^{T/2} \left(\frac{-12}{T} t \right)^2 dt + \int_{T/2}^T 36 dt \right]$$

$$= \frac{1}{T} \left[\frac{144}{T^2} \cdot \frac{t^3}{3} \Big|_0^{T/2} + 36t \Big|_{T/2}^T \right]$$

$$= \frac{1}{T} \left[\frac{144}{T^2} \left[\frac{T^3}{24} \right] + 36 \left(\frac{T}{2} \right) \right]$$

$$= \frac{1}{T} [6T + 18T]$$

$$= 24$$

$$\text{RMS} = \sqrt{24} = 2\sqrt{6} \text{ A}$$

13. Ans: (c)

$$\text{Sol: Average value} = \frac{1}{2\pi} \int_0^\pi 10 \sin t dt = \frac{10}{\pi}$$

$$a_1 = \frac{2}{2\pi} \int_0^\pi 10 \sin t \cos t dt = 0$$

$$b_1 = \frac{2}{2\pi} \int_0^\pi 10 \sin t \sin t dt = 5$$

$$d_1 = \sqrt{a_1^2 + b_1^2} = 5$$

14. Ans: (d)

$$\text{Sol: } \omega_0 = \pi$$

$$x(t) = a_0 + \sum_{n=1}^{\infty} a_n \cos(n\pi t) + b_n \sin(n\pi t)$$

$$x(t) = A \cos(\pi t)$$

$$A = a_1 = \int_0^2 x(t) \cos(n\omega_0) dt$$

$$= -\frac{4}{\pi^2}$$


15.

$$\text{Sol: } a_0 = 5$$

$$b_n = \int_0^1 10 \sin n\pi t dt = \frac{10[1 - (-1)^n]}{n\pi}$$

$$a_n = 0$$

$$x(t) = 5 + \frac{20}{\pi} \sin \pi t + \frac{20}{3\pi} \sin 3\pi t + \dots$$

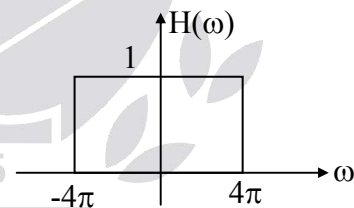

$$y(t) = 5 + \frac{20}{\pi} \sin \pi t + \frac{20}{3\pi} \sin 3\pi t$$

16.

$$\text{Sol: } \omega_0 = \frac{\pi}{3}$$

$$x(t) = 2 + \cos(2\omega_0 t) + 4 \sin(5\omega_0 t)$$

$$x(t) = 2 + \frac{1}{2} e^{j2\omega_0 t} + \frac{1}{2} e^{-j2\omega_0 t} + \frac{4}{2j} e^{j5\omega_0 t} - \frac{4}{2j} e^{-j5\omega_0 t}$$

$$c_0 = 2, c_2 = 1/2, c_{-2} = 1/2, c_5 = \frac{4}{2j}, c_{-5} = \frac{-4}{2j}$$



**X DEEP
LEARN**

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

17.

$$\text{Sol: } c_n = \int_0^1 t e^{-jn\omega_0 t} dt = \int_0^1 t e^{-jn2\pi t} dt = \frac{j}{2n\pi}$$

$$c_0 = 1/2$$

$$a_n = c_n + c_{-n} = 0$$

$$b_n = j(c_n - c_{-n}) = \frac{-1}{n\pi}$$

18.

$$\text{Sol: (i) } y(t) \Rightarrow d_n = e^{-jn\omega_0} c_n = e^{-jn\pi} c_n = c_n (-1)^n$$

$$\text{(ii) } f(t) = x(t) - y(t)$$

$$d_n = c_n - (-1)^n c_n = c_n [1 - (-1)^n]$$

$$\text{(iii) } g(t) = x(t) + y(t)$$

$$d_n = c_n + (-1)^n c_n = c_n [1 + (-1)^n]$$

19. Ans: (b)

$$\text{Sol: } d_n = e^{-jn\omega_0 t_0} c_n + e^{jn\omega_0 t_0} c_n = 2 \cos(n\omega_0 t_0) c_n$$

$$\text{Assume } t_0 = \frac{T}{4}$$

$$d_n = 2c_n \cos\left(\frac{n\pi}{2}\right)$$

$$d_n = 0 \text{ for odd harmonics}$$

20.

$$\text{Sol: } y(t) = \frac{dx(t)}{dt}$$

$$d_n = jn\omega_0 c_n$$

$$c_n = \frac{d_n}{jn\omega_0}$$

$$d_n = \frac{1}{T} \int_{-T/2}^{T/2} (\delta(t+d/2) - \delta(t-d/2)) e^{-jn\omega_0 t} dt$$

$$= \frac{2j}{T} \sin\left(\frac{n\omega_0 d}{2}\right)$$

$$C_0 = \frac{d}{T}$$

21.

$$\text{Sol: } a_K = \frac{1}{T} \int_0^T x(t) e^{-jk\omega_0 t} dt$$

$$= \frac{1}{3} \left[\int_0^1 e^{-jk\frac{2\pi}{3}t} dt + \int_1^2 -e^{-jk\frac{2\pi}{3}t} dt \right]$$

$$= \frac{1}{3} \left[\frac{e^{-jk\frac{2\pi}{3}t}}{-jk\frac{2\pi}{3}} \Big|_0^1 - \frac{e^{-jk\frac{2\pi}{3}t}}{-jk\frac{2\pi}{3}} \Big|_1^2 \right]$$

$$= \frac{1}{-jk2\pi} \left[\left(e^{-jk\frac{2\pi}{3}} - 1 \right) - \left(e^{-jk\frac{4\pi}{3}} - e^{-jk\frac{2\pi}{3}} \right) \right]$$

$$a_k = \frac{1}{jk2\pi} \left[1 - 2e^{-jk\frac{2\pi}{3}} + e^{-jk\frac{4\pi}{3}} \right]$$

22. Ans: (c)

Sol: W_1 is a periodic square waveform with period T and it is having odd symmetry and also odd harmonic symmetry (or Half-wave symmetry).

W_2 is a periodic triangular waveform with period T and it is having odd symmetry and also odd harmonic symmetry (or Half-wave symmetry).

$\therefore$ Only odd harmonics: nf_0 , $n = 1, 3, 5$ etc of sine terms are present in wave forms W_1 and W_2 in their Fourier series expansion.

Note that waveform, W_2 can be obtained by integrating the waveform, W_1 .

If c_n is the exponential FS coefficient of the n^{th} harmonic component, $c_n e^{jn\omega_0 t}$

$$|c_n| \propto \left| \frac{1}{n} \right| = |n^{-1}| \text{ for waveform } W_1$$

$$|c_n| \propto \left| \frac{1}{n^2} \right| = |n^{-2}| \text{ for waveform } W_2$$

23.

Sol:

(a) Polar form of TFS

$$= d_0 + \sum_{n=1}^{\infty} d_n \cos(n\omega_0 t + \phi_n)$$

$$d_n = 2 |c_n|$$

$$d_0 = 2, d_1 = 4, d_2 = 4, d_3 = 4$$

$$\begin{aligned} \text{polar form} &= 2 + 4\cos(\omega_0 t + 30^\circ) \\ &\quad + 4\cos(2\omega_0 t + 60^\circ) \\ &\quad + 4\cos(3\omega_0 t + 90^\circ) \end{aligned}$$

 (b) $x(t) \leftrightarrow c_n$

$$x(at) \leftrightarrow c_n, \omega_0 = a\omega_0$$

$$x(t) \leftrightarrow c_n$$

$$x(t - t_0) \leftrightarrow e^{-jn\omega_0 t_0} c_n$$

$$\frac{dx(t)}{dt} \leftrightarrow (jn\omega_0) c_n$$

24.

Sol:

$$(a) C_n = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-jn\omega_0 t} dt$$

$$C_n = \frac{1}{2} \int_0^1 1 \cdot e^{-jn\pi t} dt$$

$$C_n = \frac{1 - (-1)^n}{2jn\pi}$$

$$C_0 = \frac{1}{2} \int_0^1 dt = \frac{1}{2}$$

$$C_{-1} = \frac{j}{\pi}, C_1 = \frac{-j}{\pi}, C_{-2} = 0, C_2 = 0$$

Power upto second harmonics is

$$P = \sum_{n=-2}^2 |C_n|^2 = \frac{1}{\pi^2} + \frac{1}{4} + \frac{1}{\pi^2} = 0.453$$

$$\begin{aligned} (b) c_K &= \frac{1}{8} \left[\int_0^4 e^{-jk\frac{\pi}{4}t} dt + \int_4^8 -e^{-jk\frac{\pi}{4}t} dt \right] \\ &= \frac{1}{8} \left[\frac{e^{-jk\frac{\pi}{4}t}}{-jk\frac{\pi}{4}} \Big|_0^4 - \frac{e^{-jk\frac{\pi}{4}t}}{-jk\frac{\pi}{4}} \Big|_4^8 \right] \end{aligned}$$

$$= \frac{1}{-jk2\pi} [e^{-jk\pi} - 1 - (e^{-jk2\pi} - e^{-jk\pi})]$$

$$= \frac{-1}{jk2\pi} [(-1)^k - 1 - 1 + (-1)^k]$$

$$c_K = \frac{2}{jk2\pi} [1 - (-1)^k]$$

$$c_K = 0 \text{ for 'K' even (K=10)}$$

$$\text{Power} = 0$$

25.

Sol: (a) All periodic signals are power signals.

 For power signal $E = \infty$ [given is false]

 (b) $C_0 = j2$ (average value) [given is false]

$$(c) \frac{j}{T} \int_0^T x_1(t) dt = j2$$

$$\frac{1}{T} \int_0^T x_1(t) dt = 2 \text{ is possible only when}$$

 $x_1(t)$ is constant. So given is correct

$$\begin{aligned} (d) C_0 &= \frac{1}{T} \int_0^T x_R(t) dt + \frac{j}{T} \int_0^T x_1(t) dt \\ &= 0 + j2 \end{aligned}$$

$$\frac{1}{T} \int_0^T x_R(t) dt = 0 \text{ only when } x_R(t) \text{ is odd}$$

given is in correct

26.

Sol:

$$(a) \text{Power} = \frac{1}{T} \int_{-\infty}^{\infty} |x(t)|^2 dt = \sum_{n=-\infty}^{\infty} |C_n|^2$$

$$\begin{aligned} P &= \sum_{n=-4}^4 |C_n|^2 \\ &= (0.5)^2 + (1)^2 + (2)^2 + (4)^2 + (2)^2 + (1)^2 + (0.5)^2 \\ &= 26.5 \text{ Watts} \end{aligned}$$

$$(b) x(t) = \sum_{n=-\infty}^{\infty} C_n e^{jn\omega_0 t}$$

$$\begin{aligned} &= C_{-4} e^{-j4\omega_0 t} + C_{-3} e^{-j3\omega_0 t} e^{-\frac{j\pi}{2}} + C_{-2} e^{-j2\omega_0 t} e^{-\frac{j\pi}{4}} + C_{-1} e^{-j\omega_0 t} \\ &\quad + C_0 + C_1 e^{j\omega_0 t} + C_2 e^{j2\omega_0 t} e^{\frac{j\pi}{4}} + C_3 e^{j3\omega_0 t} e^{\frac{j\pi}{2}} + C_4 e^{j4\omega_0 t} \end{aligned}$$


**X DEEP
LEARN**

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

$$\begin{aligned}
 &= 0.5e^{-j4\omega_0 t} + 1e^{-j3\omega_0 t - \frac{\pi}{2}} \\
 &\quad + 2e^{-j2\omega_0 t - \frac{\pi}{4}} + 0.5e^{j4\omega_0 t} + 1e^{j3\omega_0 t + \frac{\pi}{2}} + 2e^{j2\omega_0 t + \frac{\pi}{4}} + 4 \\
 &= (0.5)[e^{-j4\omega_0 t} + e^{j4\omega_0 t}] + 2\left[e^{-j2\omega_0 t - \frac{\pi}{4}} + e^{j2\omega_0 t + \frac{\pi}{4}}\right] \\
 &\quad \left[e^{-j3\omega_0 t - \frac{\pi}{2}} + e^{j3\omega_0 t + \frac{\pi}{2}}\right] + 4
 \end{aligned}$$

$$\begin{aligned}
 \Rightarrow x(t) &= \cos 4\omega_0 t + 4 \cos\left(2\omega_0 t + \frac{\pi}{4}\right) \\
 &\quad + 2 \cos\left(3\omega_0 t + \frac{\pi}{2}\right) + 4
 \end{aligned}$$

$$x(t) \neq x(-t)$$

$$x(-t) \neq -x(t)$$

So, neither even nor odd signal.

(c) $f_0 = 10 \text{ Hz}$

$$\omega_0 = 2\pi f_0 = 20\pi \text{ rad}$$

$$\begin{aligned}
 x(t) &= \cos(80\pi t) + 4 \cos\left(40\pi t + \frac{\pi}{4}\right) \\
 &\quad + 2 \cos\left(60\pi t + \frac{\pi}{2}\right) + 4
 \end{aligned}$$

(d) Cut off frequency = 25 Hz
 $= 50\pi \text{ rad}$

So output of the filter is

$$y(t) = 4 \cos\left(40\pi t + \frac{\pi}{4}\right) + 4$$

27.

Sol: A. Fourier transform of periodic impulse train is also periodic impulse train

$$A \rightarrow 2$$

B. For a full wave rectified wave form

$$c_n = \frac{2A}{\pi(1-4n^2)}, n \text{ is even}$$

$$B \rightarrow 5,$$

$$C \rightarrow 3$$

D. Given signal satisfied half-wave symmetry so only harmonics are present

$$D \rightarrow 4$$

28. **Ans: (b)**

Sol: Frequency is constant. So, S_1 is LTI system, frequency is not constant. So, S_2 is not LTI system.

29. **Ans: (d)**

Sol: Fourier series expresses the given periodic waveform as a combination of d.c. component, sine and cosine waveforms of different harmonic frequencies as

$$\begin{aligned}
 f(t) &= a_0 + \sum_{n=1}^{\infty} a_n \cos(n\omega_0 t) + \sum_{n=1}^{\infty} b_n \sin(n\omega_0 t) \\
 &= A_0 + A_n \cos(n\omega_0 t + \phi_n)
 \end{aligned}$$

So, statement (1) is true.

A_n and ϕ_n (Amplitude and phase spectra) occur at discrete frequencies.

So, statement (2) is true.

Waveform symmetries (Even, odd, Half-wave) simplify the evaluation of FS coefficients.

So, statement (3) is true.

Statements 1, 2, 3 are correct.

30. **Ans: (d)**

Sol: For a real valued periodic function $f(t)$ of frequency f_0

$$C_n = C_{-n}^*$$

Statement (I) is False but Statement (II) is True because the discrete magnitude spectrum of real function $f(t)$ is even and phase spectrum is odd.

01.

Sol: $X(f) = \int_{-\infty}^{\infty} x(t) e^{-j2\pi ft} dt$

$x(t)$ units are volts and dt units are sec

So, Unit of $X(f)$ is volt-sec (or) volt/Hz

02.

Sol:

(a) $X(0) = \int_{-\infty}^{\infty} x(t) dt = \text{area}$

$$= (4 \times 2) - \left(\frac{1}{2} \times 1 \times 2 \right) = 7$$

(b) $2\pi x(0) = 2\pi \times 2 = 4\pi$

03.

Sol:

(i) $x(t) = e^{-at}u(t) + e^{at}u(-t)$

$$X(\omega) = \frac{1}{a + j\omega} + \frac{1}{a - j\omega} = \frac{2a}{a^2 + \omega^2}$$

(ii) $e^{-at}u(t) - e^{at}u(-t) \leftrightarrow \frac{-2j\omega}{a^2 + \omega^2}$

As $a \rightarrow 0$

$$u(t) - u(-t) \leftrightarrow \frac{2}{j\omega}$$

$$\text{sgn}(t) \leftrightarrow \frac{2}{j\omega}$$

04.

Sol: $G(\omega) = 1 + \frac{12}{\omega^2 + 9}$

Apply inverse Fourier Transform

$$g(t) = \delta(t) + 2e^{-3|t|}$$

05. **Ans: Zero**

Sol: $x(t) = \text{rect}(t/2), \quad X(\omega) = 2\text{sinc}(\omega)$

$$y(t) = x(t) + x(t/2), \quad Y(\omega) = X(\omega) + 2X(2\omega)$$

$$Y(\omega) = \frac{2\sin \omega}{\omega} + \frac{4\sin 2\omega}{\omega}$$

$$f = 1 \Rightarrow \omega = 2\pi, Y(2\pi) = 0$$

06. **Ans: (d)**

Sol: $Y(\omega) = 3X(2\omega)$

$$x(at) \leftrightarrow \frac{1}{|a|} X\left(\frac{\omega}{a}\right)$$

$$x\left(\frac{t}{2}\right) \leftrightarrow 2X(2\omega)$$

$$\frac{1}{2}x\left(\frac{t}{2}\right) \leftrightarrow X(2\omega)$$

$$y(t) = 3/2 x(t/2)$$

07.

Sol: i) $1 \leftrightarrow 2\pi\delta(\omega)$

ii) $\frac{1}{a + jt} \leftrightarrow 2\pi e^{a\omega} u(-\omega)$

iii) $\frac{2a}{a^2 + t^2} \leftrightarrow 2\pi e^{-a|\omega|}$

iv) $\frac{1}{\pi t} \leftrightarrow -j \text{sgn}(\omega)$

08.

Sol: $x_1(t) = \text{rect}\left(\frac{t}{1}\right) \quad X_1(f) = \text{Sinc}(f)$

$$x(t) = x\left(t - \frac{1}{2}\right) \quad X(f) = e^{-j\pi f} X(f)$$

$$\begin{aligned} \text{FT}[x(t) + x(-t)] &= X(f) + X(-f) \\ &= 2\cos(\pi f) \cdot \text{Sinc}(f) \end{aligned}$$



X DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

09.

Sol: $u(t) \leftrightarrow \pi \delta(\omega) + \frac{1}{j\omega}$

$$\frac{1}{jt} + \pi \delta(t) \leftrightarrow 2\pi u(-\omega)$$

$$\frac{1}{2} \delta(t) - \frac{1}{j2\pi t} \leftrightarrow u(\omega)$$

10.

Sol:

i) $x(t) = e^{-3(t-1)} u(t-1) e^{-3}$

$$X(\omega) = e^{-j\omega} e^{-3} \frac{1}{3 + j\omega}$$

ii) $\pi \left(\frac{t}{2} \right) \leftrightarrow 2 \text{Sa}(\omega)$

$$\pi \left(\frac{t-1}{2} \right) \leftrightarrow 2e^{-j\omega} \text{Sa}(\omega)$$

iii) $e^{-2|t|} \leftrightarrow \frac{4}{4 + \omega^2}$

$$e^{-2|t-2|} \leftrightarrow \frac{4e^{-2j\omega}}{4 + \omega^2}$$

11.

Sol:

(a) $f_1(t) = f(t - 1/2) + f(-t - 1/2)$

$$F_1(\omega) = e^{-j\omega/2} F(\omega) + e^{j\omega/2} F(-\omega)$$

(b) $f_2(t) = \frac{3}{2} f\left(\frac{t}{2} - 1\right)$

$$F_2(\omega) = 3e^{-2j\omega} F(2\omega)$$

 12. **Ans: (a)**

Sol: $g(t) = x(t-3) - x(-t+2)$

$$G(f) = e^{-j6\pi f} X(f) - e^{-j4\pi f} X(-f)$$

13.

Sol:

i) $\cos \omega_0 t = \frac{1}{2} \left[e^{j\omega_0 t} + e^{-j\omega_0 t} \right] \leftrightarrow \pi [\delta(\omega + \omega_0) + \delta(\omega - \omega_0)]$

ii) $\sin \omega_0 t \leftrightarrow \frac{\pi}{j} [\delta(\omega - \omega_0) - \delta(\omega + \omega_0)]$

iii) $e^{-at} \sin \omega_c t u(t) \leftrightarrow \frac{1}{2j} \left[\frac{1}{a + j(\omega - \omega_c)} - \frac{1}{a + j(\omega + \omega_c)} \right]$

iv) $\text{Arect}\left(\frac{t}{T}\right) \cos \omega_0 t = \frac{AT}{2} \left[\text{Sa}\left[\frac{\omega + \omega_0}{2}\right] T + \text{Sa}\left[\frac{\omega - \omega_0}{2}\right] T \right]$

14.

Sol: $\text{Sinc}(t) \leftrightarrow \text{rect}(f)$

$$\text{Sinc}(t) \cos(10\pi t) \leftrightarrow \frac{1}{2} [\text{rect}(f - 5) + \text{rect}(f + 5)]$$

15.

Sol: (i) $e^{-j3t} x(t) \leftrightarrow X(\omega + 3)$

(Frequency shifting property)

$$e^{-j\frac{3}{4}t} x(t/4) \leftrightarrow 4X(4\omega + 3)$$

(Time scaling property)

$$\frac{1}{4} e^{-j\frac{3}{4}t} x(t/4) \leftrightarrow X(4\omega + 3)$$

(ii) Ans: (a)

$$X(\omega) = 2\pi \delta(\omega) + \pi [\delta(\omega - 4\pi) + \delta(\omega + 4\pi)]$$

$$x(t) = 1 + \cos(4\pi t)$$

 16. **Ans: (d)**

Sol: $X(f) = \delta(f - f_0)$


$$x(t) = e^{j2\pi f_0 t}$$

$$x(t) \Big|_{t=\frac{1}{8f_0}} = e^{\frac{j\pi}{4}}$$


$$\angle x(t) = \frac{\pi}{4}$$

17. Ans: (b)

Sol:



$$x(t) \cos 2\pi t \leftrightarrow \frac{1}{2} [X(f-1) + X(f+1)]$$



18. Ans: (d)

Sol: Output of multiplier

$$= \frac{1}{2} x(t) \cos(2\omega_c t + \theta) + \frac{1}{2} x(t) \cos \theta$$

$$\text{Output of the filter is } = \frac{1}{2} x(t) \cos \theta \times 2 \\ = x(t) \cos \theta$$

19. Ans: (c)

Sol: $y(t) = \frac{dx(t)}{dt}$

$$Y(\omega) = j\omega X(\omega)$$

It $x(t)$ is even function, then $y(t)$ is odd function.

It $x(t)$ is triangular function $X(\omega)$ is Sinc² function, it is real.

$y(t)$ is odd function, $Y(\omega)$ is imaginary.

20. Ans: $= \frac{-1}{2\sqrt{\pi}}$

Sol: $x(t) = \frac{1}{2\pi} \left[\int_{-\infty}^{\infty} X(\omega) e^{j\omega t} d\omega \right]$

$$\frac{dx(t)}{dt} = \frac{1}{2\pi} \int_{-\infty}^{\infty} j\omega X(\omega) e^{j\omega t} d\omega$$

$$\begin{aligned} \left. \frac{dx(t)}{dt} \right|_{t=0} &= \frac{1}{2\pi} \int_{-\infty}^{\infty} j\omega X(\omega) d\omega \\ &= \frac{1}{2\pi} \left[\int_{-1}^0 j\omega (-j\sqrt{\pi}) d\omega + \int_0^1 j\omega (j\sqrt{\pi}) d\omega \right] \\ &= \frac{-1}{2\sqrt{\pi}} \end{aligned}$$

21.

Sol: $te^{-a|t|} \leftrightarrow j \frac{d}{d\omega} \left[\frac{2a}{a^2 + \omega^2} \right] = \frac{-4ja\omega}{(a^2 + \omega^2)^2}$

$$te^{-|t|} \leftrightarrow \frac{-4j\omega}{(\omega^2 + 1)^2}$$

Apply duality property

$$\frac{4t}{(t^2 + 1)^2} \leftrightarrow -2\pi j\omega e^{-|\omega|}$$

22.

Sol:

(i) $X_1(\omega) = e^{-2j\omega} X(-\omega) + e^{2j\omega} X(-\omega)$

(ii) $X_2(\omega) = \frac{1}{3} e^{-2j\omega} X\left(\frac{\omega}{3}\right)$

(iii) $X_3(\omega) = (j\omega)^2 e^{-3j\omega} X(\omega)$

(iv) $X_4(\omega) = j \frac{d}{d\omega} [j\omega X(\omega)]$

23.

Sol: $x(t) = \text{rect}(t/2)$

$$X(\omega) = \frac{2 \sin \omega}{\omega}$$

(a). $y_1(t) = x(t-1) \Rightarrow Y_1(\omega) = e^{-j\omega} X(\omega)$

(b). $\Rightarrow y_2(t) = x(t) * x(t)$

$$Y_2(\omega) = X(\omega) X(\omega) = \frac{2 \sin \omega}{\omega} \frac{2 \sin \omega}{\omega}$$

$$Y_2(\omega) = 4 \frac{\sin^2 \omega}{\omega^2}$$



DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

(c). $y_3(t) = tx(t) \quad Y_3(\omega) = j \frac{d}{d\omega} [X(\omega)]$

(d). $y_4(t) = x(t) \sin \pi t \leftrightarrow \frac{1}{2j} [X(\omega - \pi) - X(\omega + \pi)]$

(e). $y_5(t) = \frac{dx(t)}{dt} \leftrightarrow j\omega X(\omega)$

(f). $y_6(t) = (t+1)x(t) + 2u(t-1)$

(g). $y_7(t) = y_1\left(\frac{t}{2}\right) \leftrightarrow 2Y_1(2\omega)$

(h). $y_8(t) = y_2(2(t+1)) - y_2(2(t-1))$

$$\begin{aligned} Y_8(\omega) &= \frac{1}{2} Y_2\left(\frac{\omega}{2}\right) e^{-j\omega(-1)} - \frac{1}{2} Y_2\left(\frac{\omega}{2}\right) e^{-j\omega(1)} \\ &= \frac{1}{2} Y_2\left(\frac{\omega}{2}\right) e^{j\omega} - \frac{1}{2} Y_2\left(\frac{\omega}{2}\right) e^{-j\omega} \\ &= \frac{1}{2} Y_2\left(\frac{\omega}{2}\right) [e^{j\omega} - e^{-j\omega}] \end{aligned}$$

(i). $y_9(t) = x\left(\frac{t}{2}\right) - \frac{1}{2} y_2(t)$

$$Y_9(\omega) = 2X(2\omega) - \frac{1}{2} Y_2(\omega)$$


(j). $z(t) = \frac{1}{2} y_2(2t)$

$$y_{10}(t) = z(t+1) + z(t) + z(t-1)$$

$$Y_{10}(\omega) = (1 + 2\cos\omega) Z(\omega)$$

24. Ans: $y(t) = \cos 2t$


Sol: $h(t) = \frac{\sin 4t}{\pi t} \quad H(\omega) = \text{rect}\left(\frac{\omega}{8}\right)$



$$y(t) = \cos 2t$$


25.

Sol: $X(\omega) = \text{rect}\left(\frac{\omega}{2\omega_1}\right) + \text{rect}\left(\frac{\omega}{2\omega_2}\right)$

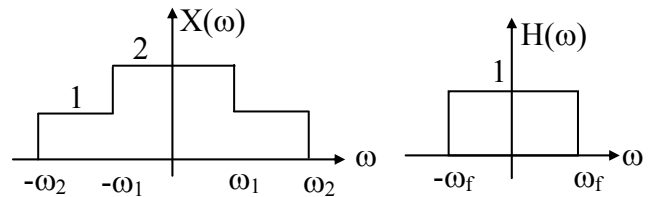


(a). $0 < \omega_f < \omega_1 \quad Y(\omega) = X(\omega) \cdot H(\omega)$

$$y(t) = \frac{2 \sin \omega_f t}{\pi t}$$



(b). $\omega_1 < \omega_f < \omega_2$

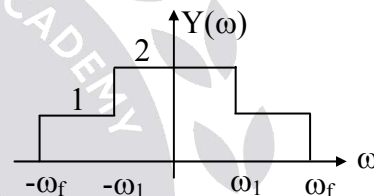

$$y(t) = \frac{\sin \omega_1 t}{\pi t} + \frac{\sin \omega_f t}{\pi t}$$

(c). $\omega_f > \omega_2 \quad y(t) = \frac{\sin \omega_1 t}{\pi t} + \frac{\sin \omega_2 t}{\pi t}$

26.

Sol:

(a). $X(\omega) = \delta(\omega) + \delta(\omega-5) + \delta(\omega-\pi)$

$$x(t) = 1 + e^{-j5t} + e^{-j\pi t}$$


$$e^{-j\pi t} \Rightarrow T_1 = \frac{2\pi}{\pi} = 2$$

$$e^{-j5t} \Rightarrow T_2 = \frac{2\pi}{5} = \frac{2\pi}{5}$$

$$\frac{T_1}{T_2} = \frac{5}{\pi} \text{ is irrational}$$

So, non-periodic

(b). $h(t) = u(t) - u(t-2)$



$$\Rightarrow h(t) = \text{rect}\left(\frac{t}{2} - 0.5\right)$$

$$\text{rect}(t) \leftrightarrow \frac{\sin \frac{\omega}{2}}{\frac{\omega}{2}}$$

$$\text{rect}\left(\frac{t}{2} - 0.5\right) \leftrightarrow 2e^{-j\omega} \frac{\sin \omega}{\omega}$$

$$\Rightarrow H(\omega) = 2e^{-j\omega} \frac{\sin \omega}{\omega}$$

$$x(t) * h(t) \leftrightarrow H(\omega) X(\omega)$$

$$\begin{aligned} X(\omega)H(\omega) &= [\delta(\omega) + \delta(\omega-5) + \delta(\omega-\pi)] \left[2e^{-j\omega} \frac{\sin \omega}{\omega} \right] \\ &= \delta(\omega) \text{Lt}_{x \rightarrow 0} 2e^{-j\omega} \frac{\sin \omega}{\omega} + \delta(\omega-5) 2e^{-j5} \frac{\sin 5}{5} \\ &\quad + \delta(\omega) 2e^{-j\pi} \frac{\sin \pi}{\pi} \end{aligned}$$

$$= 2\delta(\omega) + 2e^{-j5} \frac{\sin 5}{5} \delta(\omega-5) \left[\text{Lt}_{x \rightarrow \pi} \frac{\sin x}{x} = 0 \right]$$

$$X(\omega)H(\omega) = 2\delta(\omega) + 2e^{-j5} \frac{\sin 5}{5} \delta(\omega-5)$$

$$\Rightarrow x(t) * h(t) = 2 + 2e^{-j5} \frac{\sin 5}{5} e^{-j5t}$$

$\Rightarrow$ Periodic

(c). In above problem, convolution of two non periodic signals can be a periodic signal

27.

Sol:

(a). $y_1(t) = \text{rect}(t) * \cos \pi t$

$$\text{rect}(t) \leftrightarrow \frac{2}{\omega} \sin \frac{\omega}{2} \left[\because Y(\omega) = \int_{-\infty}^{\infty} y(t) e^{-j\omega t} dt \right]$$

$$\text{rect}(t) \leftrightarrow \frac{\sin\left(\frac{\omega}{2}\right)}{\left(\frac{\omega}{2}\right)}$$

$$\text{rect}(t) \leftrightarrow \frac{\sin\left(\pi \cdot \frac{\omega}{2\pi}\right)}{\pi \frac{\omega}{2\pi}}$$

$$\text{rect}(t) \leftrightarrow \sin c\left(\frac{\omega}{2\pi}\right)$$

$$\cos \pi \leftrightarrow \pi [\delta(\omega-\pi) + \delta(\omega+\pi)]$$

$$Y_1(\omega) = \sin c\left(\frac{\omega}{2\pi}\right) \times \pi [\delta(\omega-\pi) + \delta(\omega+\pi)]$$

$$Y_1(\omega) = \frac{2}{\omega} \sin \frac{\omega}{2} \times \pi [\delta(\omega-\pi) + \delta(\omega+\pi)]$$

$$= \frac{2}{\omega} \sin \frac{\omega}{2} \times \pi \delta(\omega-\pi) + \frac{2}{\omega} \sin \frac{\omega}{2} \times \pi \delta(\omega+\pi)$$

$$= \frac{2}{\pi} \sin \frac{\pi}{2} \pi \delta(\omega-\pi) + \frac{2}{-\pi} \sin\left(\frac{-\pi}{2}\right) \pi \delta(\omega+\pi)$$

$$= 2\delta(\omega-\pi) + 2\delta(\omega+\pi)$$

$$Y_1(\omega) = \frac{2}{\pi} \pi [\delta(\omega-\pi) + \delta(\omega+\pi)]$$

Taking inverse fourier transform

$$\therefore y_1(t) = \frac{2}{\pi} \cos \pi t$$

(b). $y_2(t) = \text{rect}(t) * \cos 2\pi t$

Similar to above

$$Y_2(\omega) = \frac{2}{\omega} \sin \frac{\omega}{2} \times \pi [\delta(\omega-2\pi) + \delta(\omega+2\pi)]$$

$$= \frac{2}{\omega} \sin\left(\frac{\omega}{2}\right) \pi \delta(\omega-2\pi) + \frac{2}{\omega} \sin\left(\frac{\omega}{2}\right) \pi \delta(\omega+2\pi)$$

$$= \frac{2}{2\pi} \sin\left(\frac{2\pi}{2}\right) \pi \delta(\omega-2\pi) + \frac{2}{-2\pi} \sin\left(\frac{-2\pi}{2}\right) \pi \delta(\omega+2\pi) = 0$$

$$\therefore y_2(t) = 0$$



DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

(c). $y_3(t) = \sin c(t) * \text{sinc}\left(\frac{t}{2}\right)$

$$\text{rect}(t) \leftrightarrow \text{sinc}\left(\frac{\omega}{2\pi}\right)$$


$$\text{sinc}\left(\frac{t}{2\pi}\right) \leftrightarrow 2\pi \text{rect}(-\omega)$$

$$\text{sinc}\left(\frac{t}{2\pi}\right) \leftrightarrow 2\pi \text{rect}(\omega)$$

$$\sin c(t) \leftrightarrow \text{rect}\left(\frac{\omega}{2\pi}\right)$$

$$\sin c\left(\frac{t}{2}\right) \leftrightarrow 2 \text{rect}\left(\frac{\omega}{\pi}\right)$$

$$\therefore Y_3(\omega) = \text{rect}\left(\frac{\omega}{2\pi}\right) 2 \text{rect}\left(\frac{\omega}{\pi}\right)$$

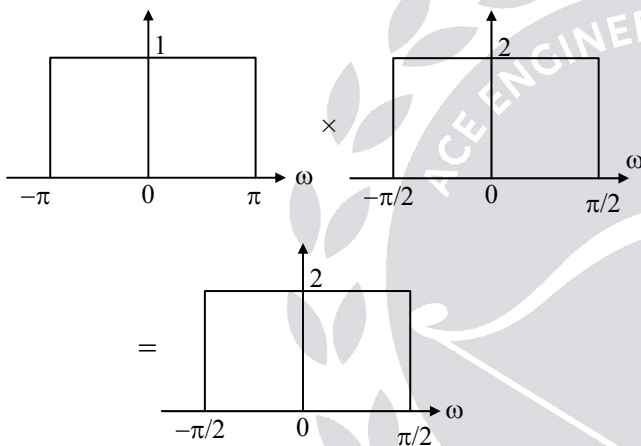

$$Y_3(\omega) = 2 \text{rect}\left(\frac{\omega}{\pi}\right)$$

$$Y_3(\omega) \leftrightarrow 2 \text{rect}\left(\frac{\omega}{\pi}\right)$$


Taking inverse fourier transform

$$y_3(t) = \sin c\left(\frac{t}{2}\right)$$

(d). $\text{sinc}(t) \leftrightarrow \text{rect}\left(\frac{\omega}{2\pi}\right)$

$$e^{j3\pi t} \sin c(t) \leftrightarrow \text{rect}\left(\frac{\omega - 3\pi}{2\pi}\right)$$

$$\sin c(t) * e^{j3\pi t} \sin c(t) \leftrightarrow \text{rect}\left(\frac{\omega}{2\pi}\right) \times \text{rect}\left(\frac{\omega - 3\pi}{2\pi}\right)$$

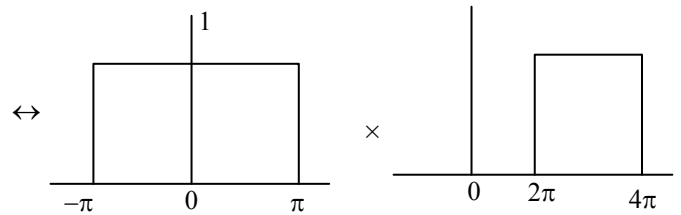


$$\leftrightarrow 0$$

$$\therefore Y_4(\omega) = 0$$

$$\Rightarrow y_4(t) = 0$$

28.

Sol:



(a). $\text{sinc}(8t) \leftrightarrow$

$$H(\omega) = 8e^{-j\omega} X_1(\omega) = e^{-j\omega} \quad -8\pi < \omega < 8\pi$$

$$= 0 \quad \text{otherwise}$$

$$Y(\omega) = \pi e^{-j\omega} [\delta(\omega + \pi) + \delta(\omega - \pi)]$$

$$y(t) = \cos \pi(t - 1)$$

(b). Ans: (d)

$$G(f) = e^{-\pi f^2} \quad H(f) = e^{-\pi f^2}$$

$$Y(f) = G(f)H(f) = e^{-2\pi f^2}$$

29. Ans: (c)

Sol: $e^{-\pi t^2} \leftrightarrow e^{-\pi f^2}$

From frequency shifting property

$$x(t) = e^{j2\pi t} e^{-\pi t^2} \quad \therefore x * (-t) = x(t)$$

-conjugate even symmetry


30.

Sol:

(a). $Y(\omega) = \frac{1}{2} [X(\omega - \omega_0) + X(\omega + \omega_0)]$

(b). $x(t) = \frac{\sin t}{\pi t} \pi \frac{\sin(t/2)}{\pi t}$

$$X(\omega) = \frac{1}{2\pi} \left[\text{rect}\left(\frac{\omega}{2}\right) * \pi \text{rect}\left(\frac{\omega}{1}\right) \right]$$

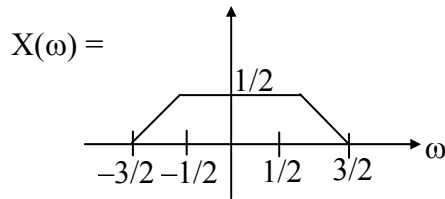


31.

Sol: $\int_{-\infty}^t x(t) dt \leftrightarrow \frac{X(\omega)}{j\omega} + \pi X(0) \delta(\omega)$

$$\leftrightarrow \frac{\text{rect}(\omega/4\pi)}{j\omega} + \pi \delta(\omega)$$

32.

Sol: $\frac{\sin(at)}{\pi t} \leftrightarrow \text{rect}\left(\frac{\omega}{2a}\right)$



$$E = \frac{1}{2\pi} \int_{-\infty}^{\infty} |X(\omega)|^2 d\omega = \frac{2a}{\pi} = \frac{a}{\pi}$$

33.

Sol: $E = \frac{1}{2\pi} \left[\int_{-1}^{-1/2} \pi d\omega + \int_{-1/2}^{1/2} \frac{\pi}{4} d\omega + \int_{1/2}^1 \pi d\omega \right] = \frac{5}{8}$

34.

Sol: $E_{x(t)} = 1/4$

$$|X(\omega)|^2 = \frac{1}{4 + \omega^2}$$

$$S_{yy}(\omega) = |X(\omega)|^2 |H(\omega)|^2 = \frac{1}{4 + \omega^2}, -\omega_c < \omega < \omega_c$$

$$E_{y(t)} = \frac{1}{2\pi} \int_{-\infty}^{\infty} S_{yy}(\omega) d\omega \Rightarrow \frac{1}{8} = \frac{1}{2\pi} \frac{1}{2} \tan^{-1}\left(\frac{\omega}{2}\right) \Big|_{-\omega_c}^{\omega_c}$$

$$\omega_c = 2 \text{ rad/sec}$$

35.

Sol: $e^{-2|t|} \leftrightarrow \frac{4}{\omega^2 + 4}$

$$\int_{-\infty}^{\infty} \frac{8}{(\omega^2 + 4)^2} d\omega = 2 \int_{-\infty}^{\infty} \left(\frac{4}{\omega^2 + 4} \right)^2 d\omega$$

$$= \frac{1}{2} (2\pi) \int_{-\infty}^{\infty} |e^{-2|t|}|^2 dt$$

$$= \frac{\pi}{2}$$

36. **Ans:** $B = \frac{2.302}{a}$

Sol: $g(t) = \frac{2a}{a^2 + t^2}$

We know $e^{-a|t|} \leftrightarrow \frac{2a}{a^2 + \omega^2}$

By duality property $\frac{2a}{a^2 + t^2} \leftrightarrow e^{-a|\omega|}$

Given $\int_{-B}^B |e^{-a|\omega|}|^2 d\omega = 0.99 \int_{-\infty}^{\infty} |e^{-a|\omega|}|^2 d\omega$

$$\Rightarrow \int_{-B}^0 e^{2a\omega} d\omega + \int_0^B e^{-2a\omega} d\omega = 0.99 \left[\int_{-\infty}^0 e^{2a\omega} d\omega + \int_0^{\infty} e^{-2a\omega} d\omega \right]$$

$$\Rightarrow \left[\frac{e^{2a\omega}}{2a} \right]_{-B}^0 + \left[\frac{e^{-2a\omega}}{-2a} \right]_0^B = 0.99 \left[\left[\frac{e^{2a\omega}}{2a} \right]_{-\infty}^0 + \left[\frac{e^{-2a\omega}}{-2a} \right]_0^{\infty} \right]$$

$$\Rightarrow \frac{1}{2a} [1 - e^{-2aB}] - \frac{1}{2a} [e^{-2aB} - 1] = \frac{0.99}{2a} [1 + 1]$$

$$\Rightarrow 2 - 2e^{-2aB} = 2 \times 0.99$$

$$\Rightarrow 1 - e^{-2aB} = 0.99$$

$$\Rightarrow 0.01 = e^{-2aB}$$

$$\Rightarrow \ln(100) = 2aB$$

$$\Rightarrow B = \frac{\ln(100)}{2a} = \frac{4.605}{2a} = \frac{2.302}{a}$$

37. **Ans: (a)**

Sol: $E = \int_{-\infty}^{\infty} |X_1(f)|^2 df = \frac{2}{3} \times 10^{-8}$

38. Ans: (c)

Sol: $\angle H(\omega) = \frac{-\omega}{60} \quad -30\pi < \omega < 30\pi$

$$\omega_0 = 10\pi \quad |H(10\pi)| = 2, \quad \angle H(10\pi) = \frac{-\pi}{6}$$

$$\omega_0 = 26\pi \quad |H(26\pi)| = 1, \quad \angle H(26\pi) = \frac{-13\pi}{30}$$

$$y(t) = 4 \cos\left(10\pi t - \frac{\pi}{6}\right) + \sin\left(26\pi t - \frac{13\pi}{30}\right)$$

39.

Sol: $\theta(\omega) = -\omega t_0$

$$t_p(\omega) = \frac{-\theta(\omega)}{\omega} = t_0$$

$$t_g(\omega) = \frac{-d\theta(\omega)}{d\omega} = t_0$$

Both are constant

40.

Sol:

(i) Ans: (c)

$$H(f) = \frac{1}{1 + j2\pi fRC}$$

$$|H(f)| = \frac{1}{\sqrt{1 + 4\pi^2 f^2 R^2 C^2}}$$

$$|H(f_1)| \geq 0.95$$

$$f_1 = 52.2 \text{ Hz}$$

(ii) Ans: (a)

$$\theta(f) = -\tan^{-1}(2\pi fRC)$$

$$t_g(f) = \frac{-d\theta(f)}{df} = \frac{1}{2\pi} \left[\frac{2\pi RC}{1 + (2\pi fRC)^2} \right]$$

$$t_g(100) = 0.71 \text{ msec}$$

41. Ans: (c)

Sol: $y(t) = \frac{1}{100} \cos(100(t - 10^{-8})) \cos(10^6(t - 1.56 \times 10^{-6}))$

$$t_g = 10^{-8}, t_p = 1.56 \times 10^{-6}$$

42.

Sol: The condition for distortion less transmission system is magnitude response is constant and phase response is linear function of frequency. These two conditions are satisfied in the frequency range 20 to 30 kHz. So, from 20 to 30 kHz no distortion.

43. Ans: 8

Sol: Given input signal frequencies are 10Hz, 20Hz, 40Hz. Only 20Hz is allowed.

So, $y(t) =$

$$\frac{1}{2} \times 8 \cos\left(20\pi t + \frac{\pi}{4} - 20^\circ\right) = 4 \cos\left(20\pi t + \frac{\pi}{4} - 20^\circ\right)$$

$$\text{Power in } y(t) = \frac{(4)^2}{2} = 8$$

44.

Sol: The condition for distortion less transmission system is magnitude response is constant and phase response is linear function of frequency.

For $-200 < \omega < 200$, there is no amplitude distortion.

And For $-100 < \omega < 100$, there is no phase distortion

$$x_1(t)$$

$$\omega = 20 \text{ and } \omega = 60$$

So no phase distortion and no amplitude distortion.

$$x_2(t)$$

$$\omega = 20, \quad \omega = 140$$

Amplitude distortion, do not occurs.

Phase distortion occurs.

$$[\because \omega = 140]$$

$$x_3(t)$$

$$\omega = 20, \quad \omega = 220,$$

Phase distortion and amplitude distortion occurs

$$[\because \omega = 220]$$



DEEP
LEARN

Deep Learn - India's Best Online Coaching Platform for GATE, ESE, and PSUs

Enjoy a smooth online learning experience in various languages at your convenience

45.

Sol: $R_{xx}(\tau) = \int_0^T x(t)x(t-\tau)dt$

$$R_{xx}(\tau) = \frac{A^2}{2} \cos(\omega_0 \tau) = 18 \cos(6\pi \tau)$$

Power = $R_{xx}(0) = 18$

46.

Sol: $r_{xx}(\tau) = x(t) * x(-t) = e^{-3t}u(t) * e^{3t}u(-t)$

$$r_{xx}(\tau) \xleftrightarrow{F.T} S_{XX}(\omega) = \frac{1}{9 + \omega^2} \Rightarrow r_{xx}(\tau) = \frac{1}{6} e^{-3|\tau|}$$

47.

Sol:

(a) $|H(\omega)|^2 = \frac{1}{1 + \omega^2}, |X(\omega)|^2 = \frac{1}{4 + \omega^2}$

$$S_{YY}(\omega) = |X(\omega)|^2 |H(\omega)|^2$$

(b) $y(t) = x(t) * h(t) = [e^{-t} - e^{-2t}]u(t)$

$$E_{y(t)} = \int_{-\infty}^{\infty} |y(t)|^2 dt = \frac{1}{12}$$

$$E_{x(t)} = \frac{1}{4}$$

$$E_{y(t)} = \frac{1}{3} E_{x(t)}$$

48.

Sol:

i) **Ans: (b)**

$$x(t) = e^{-8t}u(t) * e^{-8t}u(t) = \frac{1}{16} e^{-8|t|}$$

$$x\left(\frac{1}{16}\right) = \frac{1}{16\sqrt{e}}$$

ii) **Ans: (c)**

$$S_{GG}(\omega) = |G(\omega)|^2 = \frac{1}{64 + \omega^2}$$

$$S_{GG}(0) = \frac{1}{64}$$

iii) **Ans: (b)**

$$y(\tau) = e^{-8t}u(t) * e^{8t}u(-t)$$

$$y(\tau) = \frac{1}{16} e^{-8|\tau|}$$

$$y(0) = \frac{1}{16}$$

49.

Sol: $r_{xy}(\tau) = x(t) * y(-t) = e^{-t}u(t) * e^{3t}u(-t)$

$$r_{xy}(\tau) \leftrightarrow \frac{1}{1 + j\omega} \frac{1}{3 - j\omega} = \frac{1/2}{1 + j\omega} + \frac{1/2}{3 - j\omega}$$

$$r_{xy}(\tau) = \frac{1}{2} e^{-\tau}u(\tau) + \frac{1}{2} e^{3\tau}u(-\tau)$$

50.

Sol: Given $x(t) = \text{sinc } 10t$

$$\text{Sinc } t \leftrightarrow \text{rect}\left(\frac{\omega}{2\pi}\right)$$


$$\text{sinc}(10t) \leftrightarrow \frac{1}{10} \text{rect}\left(\frac{\omega}{20\pi}\right)$$

$$X(\omega) = \frac{1}{10} \text{rect}\left(\frac{\omega}{20\pi}\right)$$

$$H(\omega) = 3 \text{rect}\left(\frac{\omega}{8\pi}\right) e^{-j2\omega}$$

$$\therefore Y(\omega) = X(\omega) H(\omega)$$

$$= \frac{1}{10} \text{rect}\left(\frac{\omega}{20\pi}\right) 3 \text{rect}\left(\frac{\omega}{8\pi}\right) e^{-j2\omega}$$

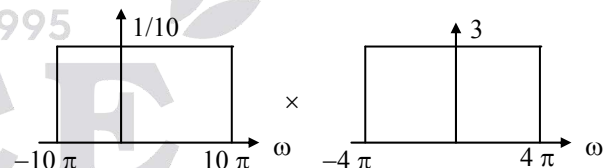

$$= \frac{3}{10} \text{rect}\left(\frac{\omega}{8\pi}\right) e^{-j2\omega}$$

$\therefore$ output energy

$$= \frac{1}{2\pi} \int_{-\infty}^{\infty} |Y(\omega)|^2 d\omega$$

$$= \frac{1}{2\pi} \int_{-4\pi}^{4\pi} \frac{9}{100} d\omega$$



DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

$$= \frac{1}{2\pi} \cdot \frac{9}{100} \times 8\pi$$


$$\text{Output energy} = \frac{36}{100} \text{ J}$$

51.

Sol:


(a). $\omega_m = 200 \pi$

$\omega_s = 400 \pi \text{ rad/sec}$



(b). $\omega_m = 400 \pi$

$\omega_s = 800 \pi \text{ rad/sec}$



(c). $x_3(t) = \frac{5}{2} [\cos(500\pi t) + \cos(3000\pi t)]$

$\omega_m = 5000 \pi$

$\omega_s = 10,000 \pi \text{ rad/sec}$

(d). $X_4(\omega) = \frac{1}{6 + j\omega} \cdot \text{rect}\left(\frac{\omega}{2a}\right)$

$\omega_m = a$

$f_m = \frac{a}{2\pi}$


$f_s = 2f_m = \frac{a}{\pi} \text{ Hz}$

(e). $\omega_m = 120 \pi, f_m = 60 \text{ Hz}$

$(f_s) = 2f_m = 120 \text{ Hz}$

(f) Ans: 0.4

Sol:

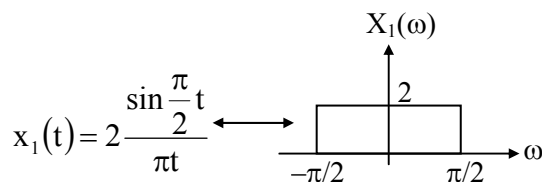

$$\sum_{n=-\infty}^{+\infty} \delta(t - nT_s) \leftrightarrow f_s \sum_{n=-\infty}^{+\infty} \delta(\omega - n\omega_s)$$

$$\sum_{n=-\infty}^{+\infty} \delta(t - 10n) \leftrightarrow \frac{1}{10} \sum_{n=-\infty}^{+\infty} \delta\left(\omega - n\frac{\pi}{5}\right)$$


$$x_1(t) * \sum_{n=-\infty}^{+\infty} \delta(t - 10n) \leftrightarrow X_1(\omega) \frac{1}{10} \sum_{n=-\infty}^{+\infty} \delta\left(\omega - n\frac{\pi}{5}\right)$$

$$X(\omega) = \frac{1}{10} \sum_{n=-\infty}^{+\infty} X_1\left(\frac{n\pi}{5}\right) \delta\left(\omega - n\frac{\pi}{5}\right)$$

$$X(\omega) = \frac{1}{10} \left[\dots + X_1(0)\delta(\omega) + X_1\left(\frac{\pi}{5}\right)\delta\left(\omega - \frac{\pi}{5}\right) + X_1\left(\frac{2\pi}{5}\right)\delta\left(\omega - \frac{2\pi}{5}\right) + X_1\left(\frac{3\pi}{5}\right)\delta\left(\omega - \frac{3\pi}{5}\right) + \dots \right]$$

$$X_1\left(\frac{\pi}{5}\right) = 2, X_1\left(\frac{2\pi}{5}\right) = 2,$$

$$X_1\left(\frac{3\pi}{5}\right) = X_1\left(\frac{4\pi}{5}\right) = \dots = 0$$

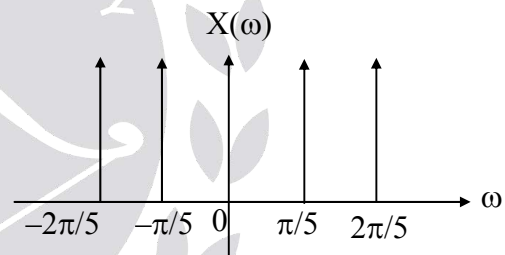

The maximum frequency in above signal is

$$\omega_m = 2\pi/5$$


$$2\pi f_m = 2\pi/5$$

$$f_m = 1/5$$

$$\text{Nyquist rate} = 2f_m = 2/5 = 0.4$$

52.


Sol:




(a). $X(\omega) + e^{-j\omega} X(\omega)$ no change in frequency axis
 $(\omega_s)_{\min} = 2\omega_m = \omega_0$

(b). $\frac{dx(t)}{dt} \leftrightarrow j\omega X(\omega)$ $\omega_s = \omega_0$

(c). $x(3t) \leftrightarrow \frac{1}{3} X\left(\frac{\omega}{3}\right)$
 $\omega_s = 2 \times \frac{3\omega_0}{2} = 3\omega_0$



(d). $\frac{1}{2} X(\omega + \omega_0) + \frac{1}{2} X(\omega - \omega_0)$



$\omega_s = 2 \times \frac{3\omega_0}{2} = 3\omega_0$

53. Sol:

(a) $x_1(2t) \leftrightarrow \frac{1}{2} X_1\left(\frac{\omega}{2}\right)$

In this operation maximum frequency becomes double. So, $f_m = 4k$, $f_s = 2f_m = 8k$

(b) $x_2(t-3) \leftrightarrow e^{-3j\omega} X_2(\omega)$

In this operation maximum frequency does not change double. So, $f_m = 3k$, $f_s = 2f_m = 6k$

(c) $X_1(\omega) + X_2(\omega)$

In this operation maximum frequency is $\max(2k, 3k)$. So, $f_m = 3k$, $f_s = 2f_m = 6k$

(d) $X_1(\omega) * X_2(\omega)$

In this operation maximum frequency is $2k + 3k$. So, $f_m = 5k$, $f_s = 2f_m = 10k$

(e) $X_1(\omega) \cdot X_2(\omega)$

In this operation maximum frequency is $\min(2k, 3k)$. So, $f_m = 2k$, $f_s = 2f_m = 4k$

(f) $\frac{1}{2} [X_1(\omega + 1000\pi) + X_1(\omega - 1000\pi)]$

$f_m = 2.5\text{kHz}$, $(f_s)_{\min} = 2f_m = 5\text{kHz}$

54. Ans: (d)

Sol: Given $x(t) = 100 \cos(24\pi \times 10^3 t)$

$$f_m = 12000\text{Hz} \text{ \& } f_s = \frac{1}{50\mu} = 20\text{KHz}$$

The frequencies in sampled signal are

$= n f_s \pm f_m = 12K, 8K, 32K, 52K, 28K, \dots$

The above frequencies passed through a filter of cutoff from 15K.

So, output is 8KHz, 12KHz only.

55. Ans: (a)

Sol: $f_m = 200\text{Hz}$, $f_s = 300\text{Hz}$

The frequency in sampled signals are = 200, 100, 500, 400, 800. Cutoff frequency of filter is 100 Hz.

Output frequency = 100 Hz

56. Ans: (b)

Sol: The sampled signal spectrum is

$$X_s(f) = \frac{1}{T_s} \sum_{n=-\infty}^{\infty} X(f - n f_s)$$

If $f_s = f_m \rightarrow$ The spectrum is constant spectrum

57. Ans: (a)

Sol: $f_m < f_c < f_s - f_m \Rightarrow 5 < f_c < 9$

58. Ans: (c)

Sol: $f_m = 100$, $f_s - f_m = 150$
 $f_s = 250$

$$T_s = \frac{1}{f_s} = 4\text{m sec}$$

59. Ans: (d)

Sol: $f_s = \frac{1}{T_0} = \frac{1}{10^{-3}} = 10^3 = 1\text{kHz}$

$$C_n = \frac{1}{T_0} \int_{-T_0/6}^{T_0/6} 3 \cdot e^{-jn\omega_0 t} dt = \frac{\sin\left(\frac{n\pi}{3}\right)}{n\pi}$$

$\therefore C_n = 0$ for $n = 3, 6, 9, \dots$



**X DEEP
LEARN**

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

$C_n \neq 0$ for $n = 0, 1, 2, 4, 6, 7, 8, 10, \dots$

$\therefore \pm f \pm 3f_s, \quad + f \pm 6f_s, \dots$

Are not present in signal

$\pm 400 \pm 3(1000) = \pm 3.4 \text{ K}, \pm 2.6 \text{ K}$

So options with 3.4 K and 2.6 K are wrong

So (c) and (a) are wrong.

3.6 K is out of the given range [2.5 to 3.5]


So (B) is wrong

So (D) is correct.

60.


(i). Ans: (b)

Sol:

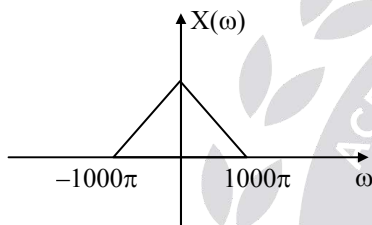


Output of multiplier is $= x(t) \cdot \cos(1000\pi t)$


$$= \frac{1}{2} X(\omega - 1000\pi) + \frac{1}{2} X(\omega + 1000\pi)$$

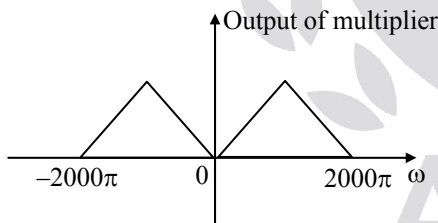

$$h(t) = \frac{\sin(1500\pi t)}{\pi t}$$

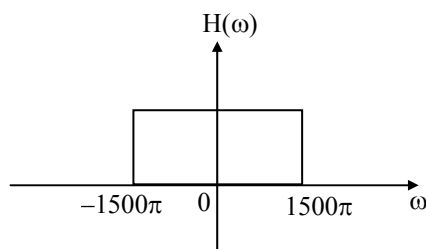

$$Y(\omega) = X(\omega) \cdot H(\omega)$$

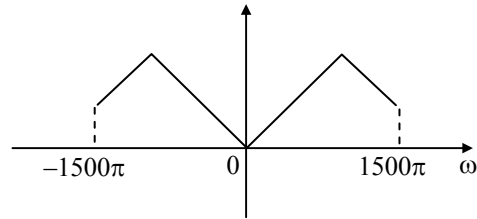

The maximum frequency in $y(t) = 1500 \pi$

$$\omega_m = 1500 \pi$$

$$f_n = 750$$

$$(f_s)_{\min} = 2f_n = 1500 \text{ Hz}$$


$$= 1500 \text{ samples/sec}$$

(ii) Ans: (a)

$$\text{Sol: } x(t) = \cos\left(10\pi t + \frac{\pi}{4}\right)$$

$$f_s = 15 \text{ Hz}, \omega_s = 2\pi f_s = 30 \pi \text{ Hz}$$


$$h(t) = \left(\frac{\sin \pi t}{\pi t}\right) \cdot \cos\left(40\pi t - \frac{\pi}{2}\right)$$

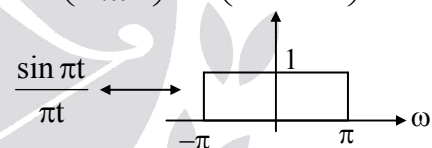

$$h(t) = \frac{\sin \pi t}{\pi t} \left[\cos(40\pi t) \cos \frac{\pi}{2} + \sin 40\pi t \sin \frac{\pi}{2} \right]$$

$$h(t) = \frac{\sin \pi t}{\pi t} \cdot \sin 40\pi t$$

$$= \frac{1}{2j} \left[\frac{\sin \pi t}{\pi t} \cdot e^{j40\pi t} - \frac{\sin \pi t}{\pi t} \cdot e^{-j40\pi t} \right]$$

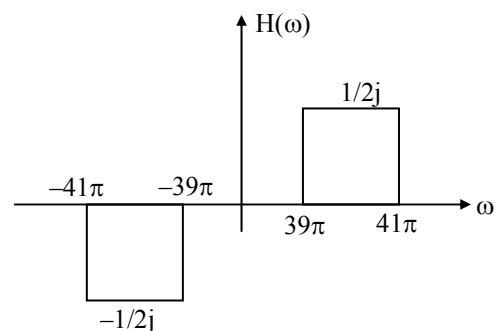

$$x(t) = \cos(10\pi t) \cos \frac{\pi}{4} - \sin(10\pi t) \sin \frac{\pi}{4}$$

$$X(\omega) = \frac{1}{\sqrt{2}} \left[\pi(\delta(\omega + 10\pi) + \delta(\omega - 10\pi)) \right] - \frac{1}{\sqrt{2}} \left[\frac{\pi}{j} (\delta(\omega - 10\pi) - \delta(\omega + 10\pi)) \right]$$

Sampled signal spectrum

$$X_s(\omega) = f_s \sum_{n=-\infty}^{\infty} X(\omega - n\omega_s)$$

$$n = 0, \omega_m, -\omega_m = -10\pi, 10\pi$$

$$n = 1, \omega_s - \omega_m, \omega_s + \omega_m = 20\pi, 40\pi$$

$$n = 2, 2\omega_s - \omega_m, 2\omega_s + \omega_m = 50\pi, 70\pi$$

only 40π frequency is allowed output of filter is

$$\begin{aligned} Y(\omega) &= \frac{15}{\sqrt{2}} \left[\frac{-\pi}{2j} \delta(\omega + 40\pi) + \frac{\pi}{2j} \delta(\omega - 40\pi) \right] - \frac{15}{\sqrt{2}} \left[\frac{\pi}{j} \times \frac{1}{2j} \delta(\omega - 40\pi) - \frac{\pi}{j} \left(\frac{-1}{2j} \right) \delta(\omega + 40\pi) \right] \\ &= \frac{15}{\sqrt{2}} \left[-\frac{\pi}{2j} \delta(\omega + 40\pi) + \frac{\pi}{2j} \delta(\omega - 40\pi) \right] - \frac{15}{\sqrt{2}} \left[\frac{-\pi}{2} \delta(\omega - 40\pi) - \frac{\pi}{2} \delta(\omega + 40\pi) \right] \\ &= \frac{15}{\sqrt{2}} \left[-\frac{\pi}{2j} \delta(\omega + 40\pi) + \frac{\pi}{2j} \delta(\omega - 40\pi) + \frac{\pi}{2} \delta(\omega - 40\pi) + \frac{\pi}{2} \delta(\omega + 40\pi) \right] \end{aligned}$$

$$Y(\omega) = \frac{15}{\sqrt{2}} \left[\frac{\pi}{2} [\delta(\omega + 40\pi) + \delta(\omega - 40\pi)] + \frac{\pi}{2j} [\delta(\omega - 40\pi) - \delta(\omega + 40\pi)] \right]$$

$$y(t) = \frac{15}{\sqrt{2}} \left[\frac{1}{2} \cos 40\pi t + \frac{1}{2} \sin 40\pi t \right]$$

$$y(t) = \frac{15}{2} \left[\cos 40\pi t \cos \frac{\pi}{4} + \sin 40\pi t \sin \frac{\pi}{4} \right]$$

$$y(t) = \frac{15}{2} \cos \left(40\pi t - \frac{\pi}{4} \right)$$

61. Ans: (c)

Sol: $x(t) = m(t) c(t)$

Where $c(t)$ is carrier signal and $m(t)$ is a base band signal and $f_c > f_H$ (where f_c is carrier frequency, f_H is the highest frequency component of $m(t)$)

$$\hat{x}(t) = m(t) \hat{c}(t)$$

Where $\hat{f}(t)$ is Hilbert transform of $f(t)$.

For the above problem $c(t) = \sin \left(\pi t - \frac{\pi}{4} \right)$

$$\text{and } m(t) = -\sqrt{2} \left(\frac{\sin(\pi t / 5)}{\pi t / 5} \right)$$

Complex envelope

$$= [x(t) + j\hat{x}(t)] e^{-j2\pi f_c t}$$

$$= -\sqrt{2} \left[m(t) \sin \left(\pi t - \frac{\pi}{4} \right) - j m(t) \cos \left(\pi t - \frac{\pi}{4} \right) \right] e^{-j2\pi f_c t}$$

$$= -\sqrt{2} m(t) \left[\cos \left(\pi t - \frac{\pi}{4} \right) + j \sin \left(\pi t - \frac{\pi}{4} \right) \right] e^{-j2\pi f_c t}$$

$$= -\sqrt{2} m(t) e^{+j \left(\pi t - \frac{\pi}{4} \right)} \cdot e^{-j2\pi \left(\frac{1}{2} \right) t}$$

$$= j\sqrt{2} m(t) e^{-j \frac{\pi}{4}} = \sqrt{2} m(t) e^{-j \frac{\pi}{4}}$$

$$= \sqrt{2} \left(\frac{\sin(\pi t / 5)}{\pi t / 5} \right) e^{j \frac{\pi}{4}}$$

62. Ans: (b)

Sol: Given $s(t) = e^{-at} \cos[(\omega_c + \Delta\omega)t] u(t)$


Complex Envelope $\tilde{s}(t) = s_+(t) e^{-j\omega_c t}$

$$\tilde{s}(t) = [e^{-at} e^{j(\omega_c + \Delta\omega)t} u(t)] e^{-j\omega_c t}$$

$$\text{Complex Envelope} = e^{-at} e^{j\Delta\omega t} u(t)$$

63. Ans: 8

Sol: $Y(\omega) = X(\omega) H(\omega)$

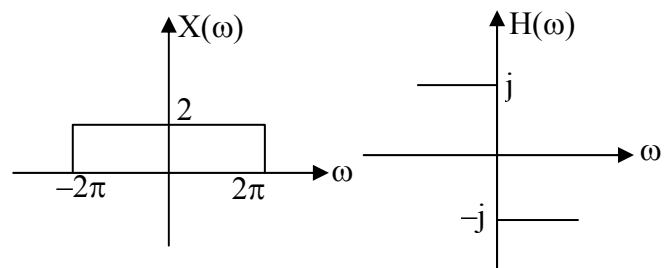

$$Y(\omega) = -2j \quad 0 < \omega < 2\pi$$

$$2j \quad -2\pi < \omega < 0$$

$$\begin{aligned} \int_{-\infty}^{\infty} |y(t)|^2 dt &= \frac{1}{2\pi} \int_{-\infty}^{\infty} |y(\omega)|^2 d\omega \\ &= \frac{1}{2\pi} \left[\int_0^{2\pi} 4 d\omega + \int_{-2\pi}^0 4 d\omega \right] \\ &= \frac{4}{2\pi} [2\pi + 2\pi] \\ &= \frac{16\pi}{2\pi} \\ &= 8 \end{aligned}$$

64. Ans: 10kHz

Sol: $m(t) \rightarrow$ band limited to 5kHz
 $m(t) \cos(40000\pi t) \rightarrow$ modulated signal we
 require least sampling rate to recover
 $m(t) \rightarrow 2 \times 5\text{kHz} = 10\text{ kHz}$

65. Ans: (c)

Sol: Aliasing occurs when the sampling frequency is less than twice the maximum frequency in the signal, and it is irreversible process.


So, Statement I is true but Statement II is false.

66. Ans: (b)

Sol: Sampling in one domain makes the signal to be periodic in the other domain. It is true.

Multiplication in one domain is the convolution in the other domain.

Both statements are correct and statement (II) is not the correct explanation of statement (I).

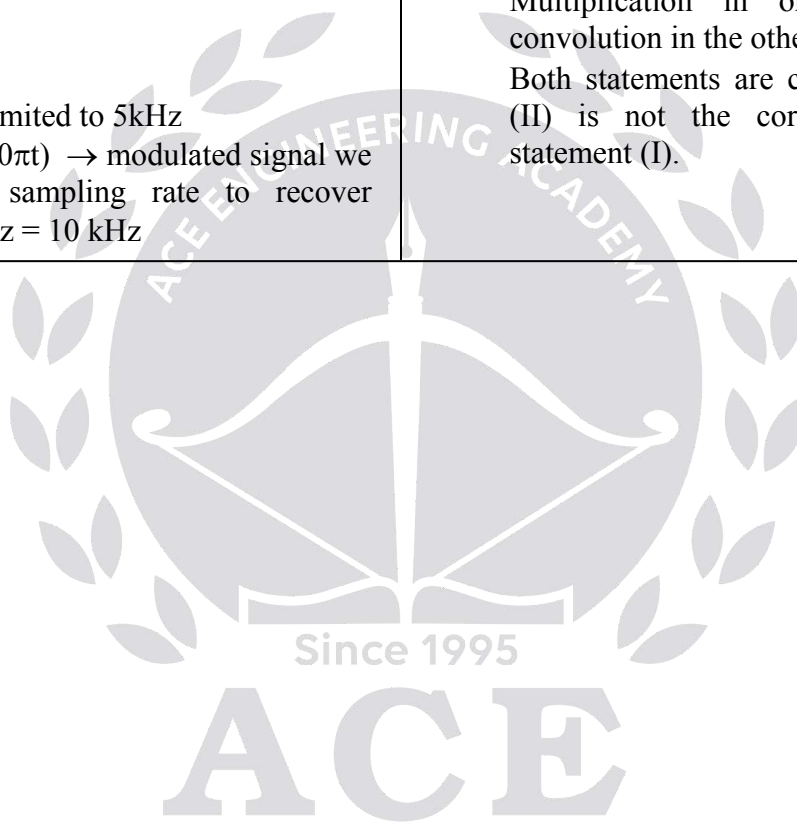

Chapter 5 Laplace Transform

01.

Sol: $e^{-at}u(t) \leftrightarrow \frac{1}{s+a}, \sigma > -a$

$e^{at}u(-t) \leftrightarrow \frac{-1}{s-a}, \sigma < a$

$e^{-at}u(-t) \leftrightarrow \frac{-1}{s+a}, \sigma > -a$

(1) $X_1(s) = \frac{1}{s+1} + \frac{1}{s+3}, \sigma > -1$

(2) $X_2(s) = \frac{1}{s+2} - \frac{1}{s-4}, -2 < \sigma < 4$

(3) no common ROC so no laplace transform for $x_3(t)$.

(4) no common ROC, no laplace transform

(5) no common ROC, no laplace transform

(6) $X_6(s) = \frac{1}{s+1} - \frac{1}{s-1}, -1 < \sigma < 1$

02.

Sol: $ROC = (\sigma > -5) \cap (\sigma > \text{Re}(-\beta)) = \sigma > -3$
Imaginary part of ' β ' any value, real part of ' β ' is 3.

03.

Sol: The possible ROC's are
 $\sigma > 2, \sigma < -3, -3 < \sigma < -1, -1 < \sigma < 2$

04.

Sol: $Y(s) = \frac{e^{-3s}}{s+1} - \frac{e^{-3s}}{s+2}$

$y(t) = e^{-(t-3)} \cdot u(t-3) - e^{-2(t-3)} \cdot u(t-3)$

05.

Sol:

(a). $x(t) = e^{-5(t-1)} \cdot u(t-1) \cdot e^{-5} \leftrightarrow X(s) = \frac{e^{-s} \cdot e^{-5}}{s+5}, \sigma > -5$

(b). $g(t) = Ae^{-5t} \cdot u(-t-t_0)$

$G(s) = \frac{-A \cdot e^{(s+5)t_0}}{s+5}, \sigma < -5$

$A = -1, t_0 = -1$

06.

Sol: $x(t) = 5r(t) - 5r(t-2) - 15u(t-2) + 5u(t-4)$

$X(s) = \frac{5}{s^2} - \frac{5e^{-2s}}{s^2} - \frac{15e^{-2s}}{s} + \frac{5e^{-4s}}{s}$

07. **Ans: (a)**

Sol: $x(t) = r(t) - r(t-1) - r(t-4) + 1.5r(t-6) - 0.5r(t-8)$

$X(s) = \frac{1}{s^2} - \frac{e^{-s}}{s^2} - \frac{e^{-4s}}{s^2} + \frac{3e^{-6s}}{2s^2} - \frac{1e^{-8s}}{2s^2}$

So, $D = -\frac{1}{2} = -0.5$

08. **Ans: (c)**

Sol: $X(s) = \frac{1}{(s+1)(s+3)}$

$G(s) = X(s-2) = \frac{1}{(s-1)(s+1)}$

$G(\omega)$ converges means ROC include $j\omega$ axis
 $-1 < \sigma < 1$

09.

Sol: $G(s) = X(s) + \alpha X(-s)$, where $X(s) = \frac{\beta}{s+1}$

$G(s) = \frac{\beta s - \beta - \alpha \beta s - \alpha \beta}{s^2 - 1} = \frac{s}{s^2 - 1}$

$\alpha \beta - \beta = -1, -\beta - \alpha \beta = 0$

$\alpha = -1, \beta = \frac{1}{2}$

10.

Sol: $\frac{dy(t)}{dt} = -2y(t) + \delta(t) \quad \frac{dy(t)}{dt} = 2x(t)$

$sY(s) = -2Y(s) + 1$ ----- (1)

$sY(s) = 2X(s)$ ----- (2)

solving (1) and (2)

$Y(s) = \frac{2}{s^2 + 4}, X(s) = \frac{s}{s^2 + 4}$



DEEP LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

11.

Sol: (a) $X(s) = \frac{-4}{s+2} + \frac{4}{(s+1)^3} - \frac{4}{(s+1)^2} + \frac{4}{s+1}$

$$x(t) = -4e^{-2t} \cdot u(t) + 4 \frac{t^2}{2} e^{-t} \cdot u(t)$$

$$-4te^{-t} \cdot u(t) + 4e^{-t} \cdot u(t)$$

(b) $X(s) = -\frac{e^{-2s}}{(s+1)^3}$

$$x(t) = -(t-2)^2 \cdot e^{-(t-2)} \cdot u(t-2)$$

$$\frac{t^2}{2} e^{-t} u(t) \leftrightarrow \frac{1}{(s+1)^3}$$

12.

Sol: $y(t) + y(t) * x(t) = x(t) + \delta(t)$

$$Y(s) + Y(s)X(s) = X(s) + 1$$

$$Y(s) = 1$$

$$y(t) = \delta(t)$$

13.

Sol: $x_1(t-2) \leftrightarrow \frac{e^{-2s}}{s+2}, \sigma > -2$

$$x_2(-t+3) \leftrightarrow \frac{e^{-3s}}{-s+3}, \sigma < 3$$

$$Y(s) = \frac{e^{-2s}}{s+2} \cdot \frac{e^{-3s}}{-s+3}, -2 < \sigma < 3$$

14.

Sol: $sY(s) + 4Y(s) + 3\frac{Y(s)}{s} = X(s)$

$$H(s) = \frac{s}{(s+1)(s+3)} = \frac{-1}{s+1} + \frac{3}{s+3}$$

$$h(t) = \frac{-1}{2} e^{-t} \cdot u(t) + \frac{3}{2} e^{-3t} \cdot u(t)$$

$$X(s) = \frac{1}{s} + 1 = \frac{s+1}{s}$$

$$Y(s) = X(s)H(s) = \frac{1}{s+3}$$

$$y(t) = e^{-3t} \cdot u(t)$$

 15. **Ans: (d)**

Sol: $X(s) = \frac{1}{s+2} + e^{-6s}, H(s) = \frac{1}{s}$

$$Y(s) = X(s)H(s) = \frac{1}{s(s+2)} + \frac{e^{-6s}}{s}$$

$$y(t) = \frac{1}{2} [u(t) - e^{-2t} \cdot u(t)] + u(t-6)$$

 16. **Ans: (b)**

Sol: $H(s) = \frac{1}{s+5}$

$$Y(s) = \frac{1}{s+3} - \frac{1}{s+5} = \frac{2}{(s+3)(s+5)}$$

$$X(s) = \frac{Y(s)}{H(s)} = \frac{2}{s+3}$$

$$x(t) = 2e^{-3t} u(t)$$

 17. **Ans: (b)**

Sol: $\frac{V(s)}{X(s)} = \frac{1}{s+1}, \frac{Y(s)}{V(s)} = \frac{1}{s+1}$

$$H(s) = \frac{Y(s)}{X(s)} = \frac{1}{s+1} \cdot \frac{1}{s+1} = \frac{1}{(s+1)^2}$$

$$h(t) = t e^{-t} \cdot u(t)$$

18.

Sol: (a) $\frac{Y(s)}{X(s)} = \frac{1}{s}$ given statement is false

(b) $x(t) = u(t)$

$$y(t) = r(t) \text{ is unbounded}$$

given statement is false

(c) $x(t) = u(-t)$

$$y(t) = \infty \text{ is unbounded}$$

given statement is false

(d) Given true

19.

Sol: $s^2Y(s) + \alpha sY(s) + \alpha^2 Y(s) = X(s)$

$$H(s) = \frac{1}{s^2 + \alpha s + \alpha^2}$$

$$G(s) = \frac{\alpha^2}{s} H(s) + sH(s) + \alpha H(s)$$

$$G(s) = \left[\frac{\alpha^2 + s^2 + s\alpha}{s} \right] \left[\frac{1}{s^2 + \alpha s + \alpha^2} \right] = \frac{1}{s}$$

Number of poles = 1.

20. Ans: (d)
Sol: Change the initial condition to $-2y(0)$ and the forcing function to $-2x(t)$
21.

Sol: (a). $x(0) = \lim_{s \rightarrow \infty} sX(s) = 2$

$$x(\infty) = \lim_{s \rightarrow 0} sX(s) = 0$$

(b). $X(s) = \frac{4s+5}{2s+1}$ improper function

$$X(s) = 2 + \frac{3}{2s+1} = \frac{3}{2s+1}$$

neglect the constant '2' in the above function.

$$x(0) = \lim_{s \rightarrow \infty} s \cdot \frac{3}{2s+1} = \frac{3}{2}$$

$$x(\infty) = \lim_{s \rightarrow 0} sX(s) = \lim_{s \rightarrow 0} \frac{4s^2 + 5s}{2s+1} = 0$$

(c). $x(0) = 0$

Final value theorem not applicable, because poles on imaginary axis.

(d). $x(0) = 0$

$$x(\infty) = -1$$

22.

Sol: $H(s) = \frac{k(s+1)}{(s+2)(s+4)}$ $X(s) = \frac{1}{s}$

$$Y(s) = H(s)X(s) = \frac{k(s+1)}{s(s+2)(s+4)}$$

$$y(\infty) = \lim_{s \rightarrow 0} sY(s) = \frac{k}{8} = 1 \Rightarrow k = 8$$

$$H(s) = \frac{-4}{s+2} + \frac{12}{s+4}$$

$$h(t) = -4e^{-2t}u(t) + 12e^{-4t}.u(t)$$

23.

Sol: $H(j\omega) = \frac{j\omega - 2}{(j\omega)^2 + 4j\omega + 4}$

$$x(t) = 8 \cos 2t, \omega_0 = 2$$

$$H(j\omega_0) = \frac{j-1}{4j} = \frac{1}{4} + \frac{1}{4}j$$

$$|H(\omega_0)| = \frac{1}{2\sqrt{2}}, \angle H(\omega_0) = \frac{\pi}{4}$$

$$y(t) = \frac{8}{2\sqrt{2}} \cos\left(2t + \frac{\pi}{4}\right) = 2\sqrt{2} \cos\left(2t + \frac{\pi}{4}\right)$$

24. Ans: (a)

Sol: $H(j\omega) = \frac{-\omega^2 + 1}{-\omega^2 + 2j\omega + 1}$

$$\omega_0 = 1 \text{ rad/sec}$$

$$H(\omega_0) = 0$$

$$y(t) = 0 \text{ for all } \omega_s$$

25. Ans: (d)

Sol: (i) $H(s) = \frac{2}{s^2 - s - 2}$ $X(s) = \frac{1}{s}$

$$Y(s) = X(s)H(s) = \frac{2}{s(s+1)(s-2)}$$

 $s = 2$ pole lies right side of s-plane

$$y(\infty) = \infty \text{ unbounded}$$

26. Ans: (d)
Sol: For an LTI system input and output frequencies must be same, there may be change in phase.

Given that input is $a_1 \sin(\omega_1 t + \phi_1)$ and corresponding output is $a_2 F(\omega_2 t + \phi_2)$.

From the above condition F may be $\sin$ or $\cos$ and $\omega_1 = \omega_2$.

27.

Sol: Given $X(s) = \frac{s+2}{s-2}$

$$y(t) = -\frac{2}{3} e^{2t} u(-t) + \frac{1}{3} e^{-t} u(t)$$

$$Y(s) = \frac{2}{3} \cdot \frac{1}{s-2} + \frac{1}{3} e^{-t} u(t)$$

$$Y(s) = \frac{2}{3} \cdot \frac{1}{s-2} + \frac{1}{3} \cdot \frac{1}{s+1}$$

$$\Downarrow \quad \Downarrow$$

$$\sigma < 2 \quad \sigma > -1$$

(a). $\therefore H(s) = \frac{Y(s)}{X(s)}$

$$= \frac{\frac{1}{3} \left[\frac{2(s+1) + s-2}{(s-2)(s+1)} \right]}{\left[\frac{s+2}{s-2} \right]}$$

$$\sigma < 2, \sigma > -1, \sigma > 0$$

$$\Downarrow$$

$$\sigma > -1$$

$$= \frac{1}{3} \cdot \frac{3s}{(s+1)(s+2)}$$

$$= \frac{s}{(s+1)(s+2)}, \sigma > -1$$

(b). The input is $e^{3t} \forall t$

$\therefore$ the output $= H(3) \times \text{input}$

$$= \frac{3}{4 \times 5} e^{3t}$$

$$y(t) = \frac{3}{20} e^{3t}$$

28.

Sol: $H(s) = \frac{s^2 + s - 2}{s + 3}$

$$H_{\text{inv}}(s) = \frac{1}{H(s)} = \frac{s+3}{(s+2)(s-1)}$$

$\sigma > +1$ causal unstable

Does not exist in this case a causal & stable system.

29. **Ans: (c)**

Sol:

(a) A system to be stable & causal all the poles of the system should lie in the left half of s -plane.

(b) Any system property like causality, stability doesn't depend on the location of zero's. It depends only on poles location.

(c) There is no necessity that the poles lie within $|s| = 1$

All the roots of characteristic equation means all the poles of the system should lie in left half of s -plane.

30. **Ans: (a)**

Sol: $Y(s) = \frac{1}{s+2}, H(s) = \frac{s-1}{s+1}$

$$X(s) = \frac{Y(s)}{H(s)} = \frac{s+1}{(s-1)(s+2)} = \frac{2/3}{s-1} + \frac{1/3}{s+2}$$

Stable input $-2 < \sigma < 1$

$$x(t) = -\frac{2}{3} e^t u(-t) + \frac{1}{3} e^{-2t} u(t)$$

31. **Ans: -2.19**

Sol: $Y(s) = 1 - \frac{4}{s+6}$

$$y(t) = \delta(t) - 4 e^{-6t} u(t)$$


$$y(0.1) = -4 e^{-0.6}$$

$$= -2.19$$

Chapter 6 Discrete Time Fourier Transform


01.

Sol:

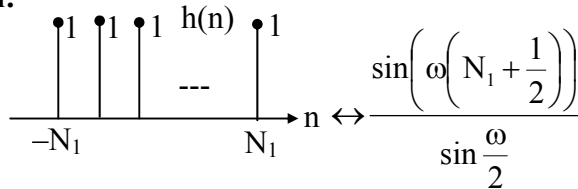

$$(a) H(\omega) = \frac{\sin\left(\frac{7\omega}{2}\right)}{\sin\left(\frac{\omega}{2}\right)}$$


Here $N_1 = 3$

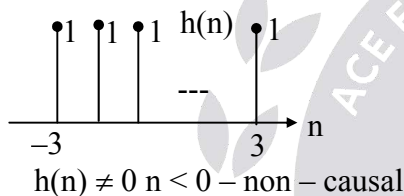

(b)

Here $N_1 = 1$

After applying time shifting property



$h(n) = 0$ for $n < 0$ causal

(c) $h(n) = \delta(n-3) + \delta(n+2)$ - non causal

02.

Sol: (a) $a^n u(n) \leftrightarrow \frac{1}{1 - ae^{-j\omega}}$

$$y(n) = \left(\frac{1}{4}\right)^n u(n)$$

$$Y(e^{j\omega}) = \frac{1}{1 - \frac{1}{4}e^{-j\omega}}$$

$$Y(e^{j0}) = \frac{1}{1 - \frac{1}{4}} = \frac{4}{3}$$

$$(b) X(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x(n)e^{-j\omega n}$$

$$\omega = \pi$$

$$X(e^{j\pi}) = \sum_{n=-\infty}^{\infty} x(n)(-1)^n = \cos^3(3\pi) = -1$$

$$(c) H(e^{j\omega}) = 1 + 2e^{-j\omega} + 3e^{-2j\omega} + 4e^{-3j\omega}$$

$$\text{DC gain } H(e^{j0}) = 1 + 2 + 3 + 4 = 10$$

03.

Sol:

$$(i) X(e^{j\omega}) = 1 + e^{j\omega} + e^{-j\omega} + \frac{3}{2}[1 + \cos 2\omega]$$

$$X(e^{j\omega}) = 1 + e^{j\omega} + e^{-j\omega} + \frac{3}{2}\left[1 + \frac{e^{2j\omega} + e^{-2j\omega}}{2}\right]$$

$$X(e^{j\omega}) = 1 + e^{j\omega} + e^{-j\omega} + \frac{3}{2} + \frac{3}{4}e^{2j\omega} + \frac{3}{4}e^{-2j\omega}$$

$$X(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x(n)e^{-j\omega n}$$

$$x(0) = 1 + \frac{3}{2} = \frac{5}{2}, x(1) = 1, x(-1) = 1,$$

$$x(2) = \frac{3}{4}, x(-2) = \frac{3}{4}$$

$$x(n) = \left[\frac{3}{4}, 1, \frac{5}{2}, 1, \frac{3}{4}\right]$$

↑

$$(ii) x(n) = 2\delta(n+3) - 3\delta(n-3)$$

$$X(e^{j\omega}) = 2e^{3j\omega} - 3e^{-3j\omega} = 2[e^{3j\omega} - e^{-3j\omega}] - e^{-3j\omega}$$

$$X(e^{j\omega}) = 4j\sin(3\omega) - e^{-3j\omega}$$

$$\text{Given } X(e^{j\omega}) = a\sin(b\omega) + ce^{jd\omega}$$


$$a = 4j, b = 3, c = -1, d = -3$$





Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

04.

Sol: $\frac{\sin\left(\frac{\pi}{4}n\right)}{\pi n} \cdot e^{j\frac{\pi}{2}n} \leftrightarrow$ 

$\frac{\sin\left(\frac{\pi}{4}n\right)}{\pi n} \cdot e^{-j\frac{\pi}{2}n} \leftrightarrow$ 




$$Y(e^{j\omega}) = \frac{\sin\left(\frac{\pi n}{4}\right)}{n\pi} \left[e^{j\frac{\pi}{2}n} + e^{-j\frac{\pi}{2}n} \right]$$

$$y(n) = 2 \frac{\sin\left(\frac{\pi n}{4}\right)}{n\pi} \cos\left(\frac{\pi n}{2}\right)$$


05.

Sol:




$$g(n) = (-1)^n \cdot h(n)$$

$$G(e^{j\omega}) = H(e^{j(\omega-\pi)})$$



Ideal HPF

(b) $Y(e^{j\omega}) = X(e^{j\omega}) + X(e^{j(\omega-\pi)})$

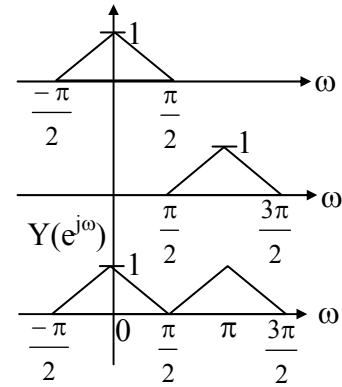

$$Y(e^{j0}) = 1, Y(e^{j\pi}) = 1$$

06.

Sol: $\left(\frac{1}{2}\right)^n u(n) \leftrightarrow \frac{1}{1 - \frac{1}{2}e^{-j\omega}}$

From time scaling property

$$\left(\frac{1}{2}\right)^{\frac{n}{10}} u\left(\frac{n}{10}\right) \leftrightarrow \frac{1}{1 - \frac{1}{2}e^{-j10\omega}}$$

07. **Ans: (b)**

Sol: $x(2n) = \{1, 3, 1\}$

$$x(2n) = \delta(n+1) + 3\delta(n) + \delta(n-1)$$

$$\delta(n - n_0) \leftrightarrow e^{-j\omega n_0}$$

$$\text{FT}[x(2n)] = 3 + 2\cos\omega$$

08.

Sol: $x\left(\frac{n}{k}\right) \leftrightarrow X(e^{j\omega k})$

(i) $x\left(\frac{n}{2}\right) \leftrightarrow X(e^{j\omega 2})$

(ii) $x(2n) \leftrightarrow X\left(e^{j\frac{\omega}{2}}\right)$

09.

Sol: $\alpha^n u(n) \leftrightarrow \frac{1}{1 - \alpha e^{-j\omega}}$


$$\alpha^{n-3} u(n-3) \leftrightarrow \frac{e^{-3j\omega}}{1 - \alpha e^{-j\omega}}$$

$$e^{jn\frac{\pi}{8}} \alpha^{n-3} \cdot u(n-3) \leftrightarrow \left[\frac{e^{-3j(\omega-\pi/8)}}{1-\alpha e^{-j(\omega-\pi/8)}} \right]$$

$$ne^{jn\frac{\pi}{8}} \alpha^{n-3} \cdot u(n-3) \leftrightarrow j \frac{d}{d\omega} \left[\frac{e^{-3j(\omega-\pi/8)}}{1-\alpha e^{-j(\omega-\pi/8)}} \right]$$

10.

Sol:



Input signal frequencies are $\frac{\pi}{8}, \frac{\pi}{4}$

Then the output is $y(n) = \sin\left(\frac{\pi}{8}n\right)$

11.

Sol: For an LTI system input is $x(n) = e^{j\omega_0 n}$
then output is $y(n) = e^{j\omega_0 n} \cdot H(e^{j\omega_0})$

$$H(e^{j\omega}) = \sum_{n=-\infty}^{\infty} h(n) e^{-j\omega n}$$

$$H(e^{j\omega}) = 8\sqrt{2} \cos 2\omega - 4\sqrt{2} \cos \omega$$

$$\omega_0 = \frac{\pi}{4}$$

$$H(e^{j\omega_0}) = -4 \quad y(n) = -4e^{jn\frac{\pi}{4}}$$

12.

Sol: (a) $y_1(n) = x_1^2(n)$ it is not an LTI system.

(b) Input frequency and output frequency are same. So, it is LTI system.

$$H(e^{j\omega}) = 2$$

(c) $y_3(n) = x_3(2n)$ it is not an LTI system.

13.

Sol: $H(e^{j\omega}) = 2\alpha \cos \omega + \beta$

$$H(e^{j\omega}) \Big|_{\omega=\frac{2\pi}{3}} = 0 \quad H(e^{j\omega}) \Big|_{\omega=\frac{2\pi}{8}} = 1$$

$$\alpha = \beta$$

$$\alpha\sqrt{2} + \beta = 1$$

$$\beta = \frac{1}{1+\sqrt{2}}$$

$$\text{DC gain} = H(e^{j0}) = 3\alpha = \frac{3}{1+\sqrt{2}}$$

14.

$$\text{Sol: } H(e^{j\omega}) = \frac{b + e^{-j\omega}}{1 - ae^{-j\omega}}$$

$$|H(e^{j\omega})|^2 = 1 \Rightarrow H(e^{j\omega}) \cdot H^*(e^{j\omega}) = 1$$

$$\left[\frac{b + e^{-j\omega}}{1 - ae^{-j\omega}} \right] \left[\frac{b + e^{j\omega}}{1 - ae^{j\omega}} \right] = 1$$

Only when $a = -b$

15. Ans: (a)

$$\text{Sol: } H(e^{j\omega}) = 1 + \alpha e^{-j\omega} + \beta e^{-2j\omega}$$

$$x(n) = 1 + 4\cos n\pi$$

$$x_1(n) = 1 \quad \omega = 0$$

$$|H(e^{j0})| = 1 + \alpha + \beta \quad \angle H(e^{j0}) = 0$$

$$y_1(n) = 1 + \alpha + \beta$$

$$x_2(n) = 4\cos n\pi \quad \omega = \pi$$

$$|H(e^{j\pi})| = 1 - \alpha + \beta \quad \angle H(e^{j\pi}) = 0$$

$$y_2(n) = 4(1 - \alpha + \beta)\cos n\pi$$

$$y(n) = (1 + \alpha + \beta) + 4(1 - \alpha + \beta)\cos n\pi$$

$$y(n) = 4 \text{ only when } \alpha = 2, \beta = 1$$

16. Ans: (a)

$$\text{Sol: } Y(e^{j0}) = \sum_{n=0}^2 x(n) \cdot \sum_{n=0}^4 h(n) = 15LB$$

17.

$$\text{Sol: } y(n) = x(n) + 2x(n-1) + x(n-2)$$

$$Y(e^{j\omega}) = X(e^{j\omega}) [1 + 2e^{-j\omega} + e^{-2j\omega}]$$

$$H(e^{j\omega}) = [1 + e^{-j\omega}]^2$$

$$= [1 + \cos \omega - j \sin \omega]^2$$



DEEP
LEARN


Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

(a) $|H(e^{j\omega})| = |2 + 2\cos\omega|$

$\angle H(e^{j\omega}) = -\omega$

$|H(e^{j\omega})|$

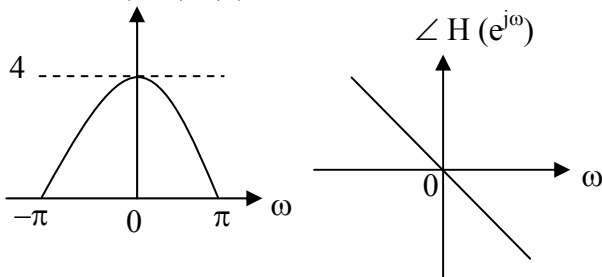

(b) Output of given input $10 + 4\cos\left(\frac{\pi n}{2} + \frac{\pi}{4}\right)$ is

$x(n) = 10, H(e^{j\omega}) = 4$

$y(n) = 40$

$= 40 + 4(2)\cos\left(\frac{\pi n}{4} + \frac{\pi}{4} - \frac{\pi}{2}\right)$

$= 40 + 8\cos\left(\frac{\pi n}{4} - \frac{\pi}{4}\right)$

18. Ans: (b)

Sol: Anti symmetric, $k = -2$

$\theta(\omega) = -2\omega$

Slope $= -2$

19. Ans: (b)

Sol: $x(n) = \cos\left(\frac{5\pi}{2}n\right) = \cos\left(\frac{\pi}{2}n\right)$ $\omega_0 = \frac{\pi}{2}$

$|H(e^{j\omega})| = 1$ $\angle H(e^{j\omega_0}) = -\frac{\pi}{8}$

$y(n) = \cos\left(\frac{n\pi}{2} - \frac{\pi}{8}\right)$

20. Ans: (b)

Sol: $X(e^{j\omega}) = 2 + 2\cos\omega + e^{-5j\omega} + 2e^{-4j\omega}$

$X\left(e^{j\frac{\pi}{4}}\right) = \frac{1-j}{\sqrt{2}}$

$\angle X(e^{j\pi/4}) = \tan^{-1}\left(\frac{-1/\sqrt{2}}{1/\sqrt{2}}\right) = -\frac{\pi}{4}$

21.

Sol: $H(\omega) = \sum_{n=-\infty}^{\infty} h(n)e^{-j\omega n} = \sum_{n=0}^2 h(n)e^{-j\omega n}$

$= \frac{1}{3} + \frac{1}{3}e^{-j\omega} + \frac{1}{3}e^{-2j\omega}$

$= \frac{1}{3}e^{-j\omega}[e^{j\omega} + e^{-j\omega}] + \frac{1}{3}e^{-j\omega}$

$= \frac{1}{3}e^{-j\omega}[2\cos\omega] + \frac{1}{3}e^{-j\omega}$

$H(\omega) = \frac{2}{3}e^{-j\omega}\cos\omega + \frac{1}{3}e^{-j\omega}$

$H(\omega) = \frac{1}{3}e^{-j\omega}[1 + 2\cos\omega]$

$H(\omega) = 0 \Rightarrow \frac{1}{3}e^{-j\omega}[1 + 2\cos\omega] = 0$ only

when


$1 + 2\cos\omega = 0$

$\cos\omega = -\frac{1}{2} = \cos\left(\frac{2\pi}{3}\right)$

$\omega = \frac{2\pi}{3} = 2.093$ rad

22.

Sol:




$E = \frac{1}{2\pi} \int_{-\omega_c}^{\omega_c} 1 d\omega = \frac{\omega_c}{\pi}$

23. Ans: $\frac{1}{40}$


Sol: By plancheral's relation

$\sum_{n=-\infty}^{\infty} x(n)y(n) = \frac{1}{2\pi} \int_{-\pi}^{\pi} X(e^{j\omega})Y(e^{j\omega})d\omega$

$$x(n) = \frac{\sin\left(\frac{n\pi}{4}\right)}{2\pi n} = \frac{1}{2} \left[\frac{\sin\left(\frac{n\pi}{4}\right)}{\pi n} \right]$$

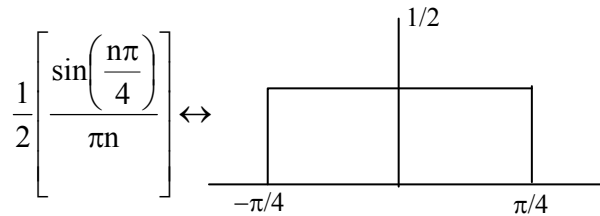

$$y(n) = \frac{1}{5} \left[\frac{\sin\left(\frac{n\pi}{3}\right)}{\pi n} \right]$$

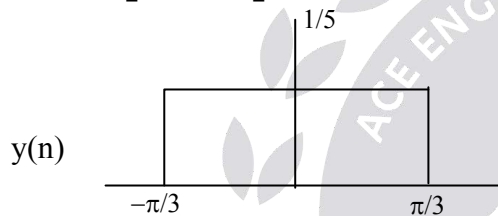

$$\sum_{n=-\infty}^{\infty} \frac{\sin \frac{n\pi}{4}}{2\pi n} \times \frac{\sin \frac{n\pi}{3}}{5\pi n} = \frac{1}{2\pi} \int_{-\frac{\pi}{4}}^{\frac{\pi}{4}} \left(\frac{1}{2}\right) \left(\frac{1}{5}\right) d\omega$$

$$= \frac{1}{40}$$

24.

Sol:

$$(a). X(e^{j0}) = \sum_{n=-\infty}^{\infty} x(n) = 6$$

$$(b). X(e^{j\pi}) = \sum_{n=-\infty}^{\infty} (-1)^n x(n) = 2$$

$$(c). \int_{-\pi}^{\pi} X(e^{j\omega}) d\omega = 2\pi x(0) = 4\pi$$

$$(d). \int_{-\pi}^{\pi} X(e^{j\omega}) e^{2j\omega} d\omega = 2\pi x(2) = 0$$

$$(e). \int_{-\pi}^{\pi} |X(e^{j\omega})|^2 d\omega = 2\pi \left[\sum_{n=-\infty}^{\infty} |x(n)|^2 \right] = 28\pi$$

$$(f). \int_{-\pi}^{\pi} \left| \frac{d}{d\omega} X(e^{j\omega}) \right|^2 d\omega = 2\pi \left[\sum_{n=-\infty}^{\infty} |nx(n)|^2 \right]$$

$$= 158 \times 2\pi = 316\pi$$

$$(g). \angle X(e^{j\omega}) = -\alpha\omega = -2\omega \quad (\alpha = 2)$$

25. Ans: (d)

Sol: $f(n) = h(n) * h(n)$

	1	2	2
1	1	2	2
2	2	4	4
2	2	4	4

$$f(n) = \{1, 4, 8, 8, 4\} \Rightarrow \text{causal}$$

$$g(n) = h(n) * h(-n)$$

$$h(-n) = \{2, 2, 1\}$$

↑

$h(-n)$ ranges from $n = -2$ to $n = 0$

$h(n)$ ranges from $n = 0$ to $n = 2$

$\therefore g(n)$ ranges from $n = -2$ to $n = 2$

	1	2	2
2	2	4	4
2	2	4	4
1	1	2	2

$$g(n) = \{2, 6, 9, 6, 2\}$$

$\Rightarrow g(n)$ is non causal and maximum value is 9.

26.

$$\text{Sol: } \frac{2\pi \times 5k}{40k} \leq \omega \leq \frac{2\pi \times 10k}{40k}$$

$$\begin{aligned} F_s &= 2f_m \\ &= 2 \times 20k \\ &= 40k \end{aligned}$$

$$\frac{\pi}{4} \leq \omega \leq \frac{\pi}{2}$$

 27. **Ans: (a)**

$$\text{Sol: } x(t) = \cos(\Omega_0 t)$$

$$x(nT_s) = \cos(\Omega_0 nT_s) = \cos\left(\frac{\Omega_0 n}{1000}\right) \text{----- (1)}$$

$$\text{Given } x(n) = \cos\left(\frac{n\pi}{4}\right) = \cos\left(\frac{9\pi n}{4}\right) \text{----- (2)}$$

By comparing (1) & (2)

$$\frac{\Omega_0}{1000} = \frac{\pi}{4} \quad ; \quad \frac{\Omega_0}{1000} = \frac{9\pi}{4}$$

$$\Omega_0 = 250\pi, \quad 2250\pi$$

 28. **Ans: 2.25 kHz**

$$\text{Sol: } H(e^{j\omega}) = 0.5 + 0.5e^{-j\omega}$$

$$\omega = \frac{\pi}{2} \text{ is 3 - dB cutoff frequency}$$

$$\omega = \frac{2\pi f}{f_s} = \frac{\pi}{2}$$

$$\frac{2\pi f}{9\text{kHz}} = \frac{\pi}{2}$$

$$f = 2.25\text{kHz}$$

01.

Sol: $a^n u(n) \leftrightarrow \frac{z}{z-a}, |z| > |a|$

$-a^n u(-n-1) \leftrightarrow \frac{z}{z-a}, |z| < |a|$

ROC = $(|z| > 1) \cap (|z| < |\alpha|) = 1 < |z| < 2$

Only when $\alpha = \pm 2$, ' n_0 ' any value

02.

Sol: (a) finite duration both sided signal $0 < |z| < \infty$

(b) finite duration right sided signal $|z| > 0$

(c) infinite duration right sided signal

$(|z| > 1/2) \cap (|z| > 3/4) = |z| > 3/4$

(d) $(|z| > 1/3) \cap (|z| < 3) \cap (|z| > 1/2) = 1/2 < |z| < 3$

03. **Ans: (a)**

Sol: ROC = $(|z| > |a|) \cap (|z| < |b^2|)$ common ROC exists only when $|a| < |b^2|$

04. **i) Ans: (b)**

Sol: ROC = $(|z| > |a|) \cap (|z| > |b|) \cap (|z| < |c|)$
 $= |b| < |z| < |c|$

ii) ROC = $(|z| > |\alpha|) \cap (|z| < |\beta|)$

$X(z) = \frac{z}{z-\alpha} - \frac{z}{z-\beta}$

(a) $\alpha > \beta$ no Z.T

(b) $\alpha < \beta$ Z.T is exist

(c) $\alpha = \beta$ no Z.T

05. **Ans: (c)**

Sol: $X(z) = \frac{-1/2}{1 - \frac{1}{2}z^{-1}} + \frac{3/2}{1 + \frac{1}{2}z^{-1}}$

$x(n) = -\frac{1}{2} \left(\frac{1}{2} \right)^n u(n) + \frac{3}{2} \left(-\frac{1}{2} \right)^n u(n)$

$x(2) = 1/4$

06. **Ans: (d)**

Sol: poles = $j, -j$, zeros = $0, 0$

$X(z) = \frac{kz^2}{z^2 + 1}$

$X(1) = 1 \Rightarrow k = 2$

$X(z) = \frac{2z^2}{z^2 + 1}$

Given right sided sequence so ROC is

$|z| > \pm j \Rightarrow |z| > 1$

$X(z) = \frac{2z^2}{z^2 + 1}$, ROC is $|z| > 1$

07. **Ans: (b)**

Sol: $X(z) = \sum_{n=0}^{\infty} \frac{3^n}{2+n} z^{2n}$
 $= \frac{1}{2} + z^2 + \frac{9}{4} z^4 + \dots$

$x(n) = \left\{ \dots, \frac{9}{4}, 0, 1, 0, \frac{1}{2} \right\}$
 $\uparrow$

Now consider (a) option

$Y_1(z) = \sum_{n=0}^{\infty} \left(\frac{2}{3} \right)^n z^{-n}$
 $= 1 + \frac{2}{3} z^{-1} + \frac{9}{4} z^{-2} + \dots$

$\sum_{n=-\infty}^{\infty} x(n) y_1(n) \neq 0$

Now consider option (b)

$Y_2(z) = z^{-1} + 4z^{-3} + \dots$

$y_2(n) = \{0, 1, 0, 4, \dots\}$

$\sum_{n=-\infty}^{\infty} x(n) y_2(n) = 0$



X DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

08. Ans: $r = -1/2$

Sol:
$$H(z) = \frac{1}{1 - \frac{1}{2}z^{-1}} + \frac{r}{1 + \frac{1}{4}z^{-1}} = \frac{1 + \frac{1}{4}z^{-1} + r(1 - \frac{1}{2}z^{-1})}{(1 - \frac{1}{2}z^{-1})(1 + \frac{1}{4}z^{-1})}$$

Consider the numerator

$$1 + \frac{1}{4}z^{-1} + r\left(1 - \frac{1}{2}z^{-1}\right)$$

$$(1+r) + \left(\frac{1}{4} - \frac{r}{2}\right)z^{-1}$$

$$\text{zero} = \frac{-\left(\frac{1}{4} - \frac{r}{2}\right)}{1+r}$$

If zero = 1

$$\frac{\frac{1}{4} - \frac{r}{2}}{1+r} = 1 \Rightarrow \frac{1}{4} - \frac{r}{2} = 1+r$$

$$\frac{-3r}{2} = \frac{3}{4} \Rightarrow r = -1/2$$

If zero = -1

$$\frac{\frac{1}{4} - \frac{r}{2}}{1+r} = -1 \Rightarrow \frac{1}{4} - \frac{r}{2} = -1-r$$

$$\frac{r}{2} = \frac{-5}{4} \Rightarrow r = -5/2 \text{ is not valid}$$

Because given as $|r| < 1$

09. Ans: (a)

Sol:
$$H(z) = \frac{z^4}{z^4 + \frac{1}{4}}$$

$$H(z) \neq H(z^{-1})$$

$$h(n) \neq h(-n)$$

$\therefore h(n)$ is not even.

$$x\left(\frac{n}{m}\right) \leftrightarrow X(z^m)$$

$$\frac{z^4}{z^4 + \frac{1}{4}} \leftrightarrow \left(-\frac{1}{4}\right)^{n/4} u\left(\frac{n}{4}\right)$$

So $h(n)$ is real for all 'n'

10.

Sol: $(-3)^n \cdot u(n-2) \leftrightarrow \frac{9z^{-1}}{z+3}, |z| > 3$

$$(-3)^{-n} \cdot u(-n-2) \leftrightarrow \frac{9z}{z^{-1}+3}, |z| < \frac{1}{3}$$

11.

Sol: $g(n) = \delta(n) - \delta(n-6)$

$$G(z) = 1 - z^{-6}, |z| > 0$$

12.

Sol: $X(z) = z^2 + 2z + \frac{2z}{z-2}$

$$x(n) = \delta(n+2) + 2\delta(n+1) - 2(2)^n u(-n-1)$$

13. Ans: 0.097

Sol: The poles of $H(z)$ are

$$P_k = \frac{1}{\sqrt{2}} \exp\left(\frac{j(2k-1)\pi}{4}\right) \quad k=1, 2, 3, 4$$

$$P_1 = \frac{1}{\sqrt{2}} e^{j\frac{\pi}{4}} = \frac{1}{2} + \frac{j}{2} = \frac{1+j}{2}$$

$$P_2 = \frac{1}{\sqrt{2}} e^{j\frac{3\pi}{4}} = \frac{-1}{2} + \frac{j}{2}$$

$$P_3 = \frac{1}{\sqrt{2}} e^{j\frac{5\pi}{4}} = -\frac{1}{2} - \frac{j}{2}$$

$$P_4 = \frac{1}{\sqrt{2}} e^{j\frac{7\pi}{4}} = \frac{1}{2} - \frac{j}{2}$$

$$H(z) = \frac{kz^4}{(z-P_1)(z-P_2)(z-P_3)(z-P_4)}$$

$$= \frac{kz^4}{z^4 + \frac{1}{4}}$$

Given $H(1) = 5/4$

$$\frac{5}{4} = \frac{k}{5/4}$$

$$k = \frac{25}{16}$$

$$H(z) = \frac{\frac{25}{16}z^4}{z^4 + \frac{1}{4}}$$

$$\text{Given } g(n) = (j)^n h(n)$$

$$G(z) = H(z/j)$$

$$G(z) = \frac{\frac{25}{16}\left(\frac{z}{j}\right)^4}{\left(\frac{z}{j}\right)^4 + \frac{1}{4}} = \frac{\frac{25}{16}z^4}{z^4 + \frac{1}{4}}$$

$$G(z) = \frac{25}{16} - \frac{25}{64}z^{-4} + \frac{25}{256}z^{-8} + \dots$$

$$g(8) = \frac{25}{256} = 0.097$$

14.

$$\text{Sol: } x(n) = \left(\frac{5}{4}\right)^n u(n) + \left(\frac{10}{7}\right)^n u(-n)$$

$$\left(\frac{5}{4}\right)^n u(n) \leftrightarrow \frac{z}{z - \frac{5}{4}}, \quad |z| > 5/4$$

$$\left(\frac{7}{10}\right)^n u(n) \leftrightarrow \frac{z}{z - \frac{7}{10}}, \quad |z| > \frac{7}{10}$$

$$\left(\frac{7}{10}\right)^{-n} u(-n) \leftrightarrow \frac{z^{-1}}{z^{-1} - \frac{7}{10}}, \quad |z^{-1}| > \frac{7}{10}$$

$$\left(\frac{10}{7}\right)^n u(-n) \leftrightarrow \frac{\frac{1}{z}}{\frac{1}{z} - \frac{7}{10}}, \quad |z| < \frac{10}{7}$$

$$X(z) = \frac{z}{z - \frac{5}{4}} + \frac{\frac{1}{z}}{\frac{1}{z} - \frac{7}{10}} \quad \text{ROC}$$

$$\left(|z| > \frac{5}{4} \cap |z| < \frac{10}{7}\right)$$

$$\text{ROC} = \frac{5}{4} < |z| < \frac{10}{7}$$

15.

$$\text{Sol: } X(z) = z^4 + z^2 - 2z + 2 - 3z^{-4}$$

$$H(z) = 2z^{-3}$$

$$Y(z) = X(z)H(z) = 2z + 2z^{-1} - 4z^2 + 4z^{-3} - 6z^{-7}$$

$$y(4) = 0$$

16.

$$\text{Sol: } x_1(n+3) \leftrightarrow \frac{z^3}{1 - \frac{1}{2}z^{-1}}, \quad |z| > \frac{1}{2}$$

$$x_2(-n+1) \leftrightarrow \frac{z^{-1}}{1 - \frac{1}{3}z}, \quad |z| < 3$$

$$Y(z) = \frac{z^2}{\left(1 - \frac{1}{2}z^{-1}\right)\left(1 - \frac{1}{3}z\right)}, \quad \frac{1}{2} < |z| < 3$$

17.

$$\text{Sol: } H(z) = \frac{1}{\left(1 - \frac{1}{2}z^{-1}\right)\left(1 - \frac{1}{3}z^{-1}\right)}$$

$$X(z) = 1 - \frac{1}{3}z^{-1}$$

$$Y(z) = H(z)X(z) = \frac{1}{1 - \frac{1}{2}z^{-1}}$$

$$\Rightarrow y(n) = \left(\frac{1}{2}\right)^n \cdot u(n)$$



DEEP
LEARN

Regular Doubt clearing Sessions | Free Online Test Series Programme

Affordable Fee | Available 3M | 6M | 12M | 18M and 24 Months Subscription Packages

18. Ans: (a)

Sol: $G(e^{j\omega}) = \alpha e^{-j\omega} + \beta e^{-3j\omega}$

$$G(e^{j\omega}) = e^{-2j\omega} (\alpha e^{j\omega} + \beta e^{-j\omega})$$


Let us consider $\alpha = \beta$

$$G(e^{j\omega}) = \alpha e^{-2j\omega} (2 \cos(\omega))$$

When $\alpha = \beta$ it gives linear phase.

19. Ans: (a)

Sol: $H(e^{j\omega}) = e^{-2j\omega} - e^{-3j\omega}$

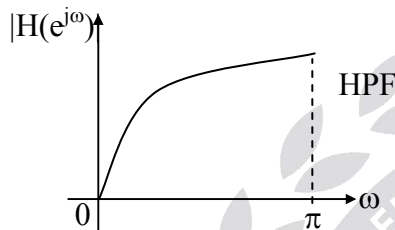

and it is FIR Filter because $h(n)$ is finite duration.

20.

Sol: (1) $x(n) = z_0^n$, $y(n) = z_0^n H(z_0)$
 $y(n) = (-2)^n \cdot H(-2) = 0$
 $H(-2) = 0$

$$(2) H(z) = \frac{Y(z)}{X(z)} = \frac{1 + a \cdot \frac{1}{1 - \frac{1}{2}z^{-1}}}{\frac{1}{1 - \frac{1}{2}z^{-1}}}$$

(a) $H(-2) = 0$

$$a = \frac{-9}{8}$$

(b) $y(n) = (1)^n \cdot H(1)$

$$H(1) = -1/4$$

$$y(n) = \frac{-1}{4} (1)^n$$

21. Ans: (a)

Sol: $y(n) = h(n) * g(n)$

$$Y(e^{j\omega}) = H(e^{j\omega}) G(e^{j\omega})$$

$$\Rightarrow Y(e^{j\omega}) = \frac{G(e^{j\omega})}{\left[1 - \frac{1}{2}e^{-j\omega}\right]}$$

$$\Rightarrow G(e^{j\omega}) = Y(e^{j\omega}) - \frac{1}{2}e^{-j\omega} Y(e^{j\omega})$$

$$\Rightarrow g(n) = y(n) - \frac{1}{2}y(n-1)$$

Put $n = 1$

$$\Rightarrow g(1) = y(1) - \frac{1}{2}y(0) = \frac{1}{2} - \frac{1}{2}$$

$$g(1) = 0$$

22. Ans: (c)

Sol: $H(e^{j\omega}) = 1 - e^{-6j\omega} = 0$ only when
 $6\omega = 2\pi n$ ($n = 1$)

$$\omega = \frac{\pi}{3}$$

$$\frac{2\pi \times f}{9k} = \frac{\pi}{3}$$

$$f = 1.5k$$

23.

Sol: $X(z) = \frac{0.5}{1 - 2z^{-1}}, |z| < 2$

$$x(n) = -0.5 (2)^n \cdot u(-n-1)$$

$$x(0) = 0$$

24.

Sol: $x(n) = \begin{cases} 1 & n \text{ even} \\ 0 & n \text{ odd} \end{cases}$

$$\Rightarrow X(z) = 1 + z^{-2} + z^{-4} + \dots$$

$$= \frac{1}{1 - z^{-2}}$$

$$= \frac{1}{(1 - z^{-1})(1 + z^{-1})}$$

$$x(\infty) = \lim_{z \rightarrow 1} (1 - z^{-1}) X(z)$$

$$= \lim_{z \rightarrow 1} (1 - z^{-1}) \left(\frac{1}{(1 + z^{-1})(1 - z^{-1})} \right)$$

$$= \frac{1}{2}$$

25.
Sol:

$$(a) \quad h(n) = \frac{\delta(n) + \delta(n-1) + \delta(n-2)}{10}$$

$$H(z) = \frac{1 + z^{-1} + z^{-2}}{10} = \frac{z^2 + z + 1}{10z^2}$$

2 finite poles, 2 finite zeros

$$(b) \quad \text{Given } x(n) = u(n)$$

$$X(z) = \frac{1}{1 - z^{-1}}$$

$$Y(z) = H(z) X(z) = \frac{(1 + z^{-1} + z^{-2})}{10(1 - z^{-1})}$$

$$y(\infty) = \lim_{z \rightarrow 1} (1 - z^{-1}) Y(z)$$

$$= \lim_{z \rightarrow 1} (1 - z^{-1}) \left[\frac{1 + z^{-1} + z^{-2}}{10} \right] \left[\frac{1}{1 - z^{-1}} \right]$$

$$y(\infty) = \frac{1 + 1 + 1}{10} = \frac{3}{10}$$

26. Ans: (a)
Sol: The output of the sampling process is

$$x(nT_s) = 2 + 5 \sin(100 \times \pi \times n \times T_s)$$

$$T_s = \frac{1}{400}$$

$$x(n) = 2 + 5 \sin \left(100 \times \pi \times n \times \frac{1}{400} \right)$$

$$x(n) = 2 + 5 \sin \left(\frac{n\pi}{4} \right), \quad \omega_0 = \frac{\pi}{4}$$

$$N_0 = \frac{2\pi}{\omega_0} m = \frac{2\pi}{\frac{\pi}{4}} m$$

$$N_0 = 8 \text{ m}$$

 $N_0 = 8$ is the No. of samples per cycle

$$\frac{Y(z)}{X(z)} = \frac{1}{N} \left[\frac{1 - z^{-N}}{1 - z^{-1}} \right]$$

$$N = 8$$

$$Y(z) = \frac{1}{8} \left[\frac{1 - z^{-8}}{1 - z^{-1}} \right] X(z)$$

Final value theorem

$$y(\infty) = \lim_{z \rightarrow 1} (1 - z^{-1}) Y(z)$$

$$y(\infty) = \lim_{z \rightarrow 1} (1 - z^{-1}) \left[\frac{1}{8} \left[\frac{1 - z^{-8}}{1 - z^{-1}} \right] X(z) \right]$$

$$y(\infty) = \lim_{z \rightarrow 1} \frac{1 - z^{-8}}{8} X(z)$$

$$y(\infty) = 0$$

27. Ans: (c)

$$\text{Sol: } Y(z) = H(z) X(z)$$

$$= \frac{A}{1 - z^{-1}} + \frac{1}{\left(1 - \frac{1}{3} z^{-1}\right)(1 - z^{-1})}$$

$$y(\infty) = \lim_{z \rightarrow 1} (1 - z^{-1}) Y(z)$$

$$\Rightarrow A + \frac{3}{2} = 0$$

$$A = -\frac{3}{2}$$

28. Ans: (c)

$$\text{Sol: } H(z) = \frac{\beta z - 2z^2}{2z^2 - \alpha}$$

$$\text{Pole} = \pm \sqrt{\frac{\alpha}{2}}$$

$$\left| \sqrt{\frac{\alpha}{2}} \right| < 1 \Rightarrow |\alpha| < 2, \text{ any value of } \beta$$

29.

Sol:

- (a). An LTI system is stable if and only if ROC includes unit circle.

$$0.5 < |z| < 2$$

- (b). For an LTI system to be causal & stable, all the poles must lie inside the unit circle.

$z = 2$ is the pole lying outside the unit circle.

So it is not possible.

- (c). $|z| > 3$

$$|z| < 0.5$$

$$0.5 < |z| < 2$$

$2 < |z| < 3$ are the four possible ROC's

30. Ans: (d)

$$\text{Sol: } H(z) = \frac{\left(z - \frac{3}{4}e^{j0}\right)\left(z - \frac{3}{4}e^{-j0}\right)}{z - \frac{4}{3}}$$

Numerator order > denominator order

so, anti-causal system & $|z| < \frac{4}{3}$ - stable

31. Ans: (d)

$$\text{Sol: Poles} \Rightarrow 1 - 0.5z^{-1} = 0 \Rightarrow z = 0.5$$

$$\text{Zeros} \Rightarrow 1 - 2z^{-1} = 0 \Rightarrow z = 2$$

If all zeros and poles are inside the unit circle [$|z| = 1$] then it is a minimum phase system.

So given system is Non minimum phase system if all poles are inside unit circle then we can say system is causal and stable. So given system is stable.

32. Ans: (a)

$$\text{Sol: } H(z) = -\frac{1}{2} + \frac{1}{2} \frac{z}{z-2}$$

Given stable system. So, ROC includes unit circle. ROC is $|z| < 2$

$$h(n) = \frac{-1}{2} \delta(n) - \frac{1}{2} (2)^n u(-n-1)$$

33. Ans: (c)

Sol: Poles $z = \pm 2j$

$$|\text{poles}| = 2$$

ROC = $|z| < 2$ because system is stable (ROC includes unit circle).

In this case system is non-causal

34. Ans: (c)

$$\text{Sol: } H(z) = \frac{z}{z + \frac{1}{2}} \text{ is a stable system because}$$

pole $z = -\frac{1}{2}$ is inside the unit circle.

The poles of $H(z)$ should be inside the unit circle for a stable system.

$\therefore$ A is True but R is false.

35. Ans: (c)

$$\text{Sol: } H(z) = \frac{z^2 + 1}{(z + 0.5)(z - 0.5)}$$

- (1) The system is stable because poles $z = \pm 0.5$ are inside the unit circle.

$$(2) h(0) = \lim_{z \rightarrow \infty} H(z) = 1$$

$$(3) \omega = \frac{2\pi f}{f_s} = \frac{2\pi \times \frac{f_s}{4}}{f_s} = \frac{\pi}{2}$$

$$H(e^{j\omega}) = \frac{e^{2j\omega} + 1}{(e^{j\omega} + 0.5)(e^{j\omega} - 0.5)} \text{ at } \omega = \frac{\pi}{2} = 0$$

36. Ans: (c)

Sol: A causal LTI system is stable if and only if all of poles of $H(z)$ lie inside the unit circle. So, Assertion (A) is true but Reason (R) is false.

37. Ans: (b)

Sol:
$$H(z) = \frac{z^3 - 2z^2 + z}{z^2 + \frac{1}{4}z + \frac{1}{8}} = \frac{N(z)}{D(z)}$$

As $N(z)$ is of higher order than $D(z)$, the system is not causal, as $\delta(n+1)$ is one of the terms in the output for the input $\delta(n)$.

If the $N(z)$ is of lower order than the denominator, the system

- (i) may be causal or
- (ii) may not be causal as it depends upon the ROC of the given $H(z)$.

So, Both Statement I and Statement II are individually true but Statement II is not the correct explanation of Statement I


38. Ans: (a)

Sol: Both Statement I and Statement II are individually true and Statement II is the correct explanation of Statement I

39. Ans: (b)


Sol:
$$H(z) = \frac{P_0 + P_1 z^{-1} + P_3 z^{-3}}{1 + d_3 z^{-3}}$$

Direct Form – I

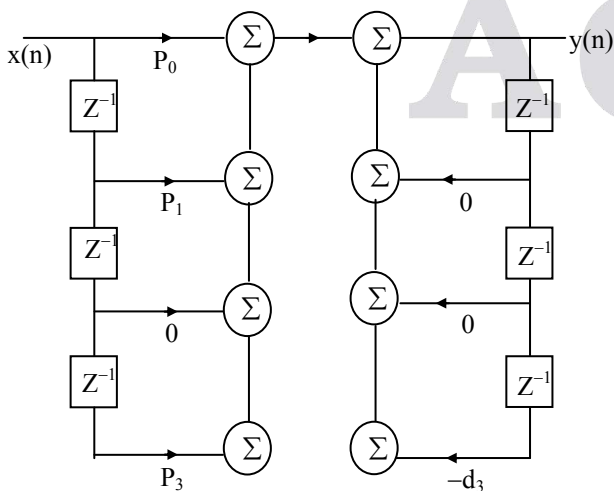

No. of delays = 6

Direct Form – II

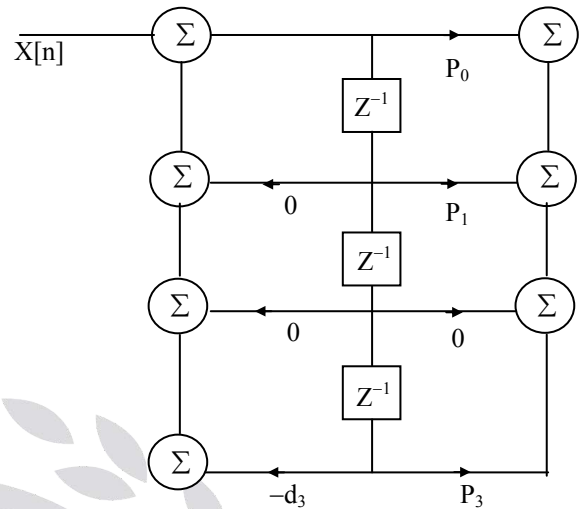

No. of delay's = 3

40.

Sol: $y(n) = x(n-1) \Rightarrow Y(z) = z^{-1} X(z)$

$H(z) = z^{-1} = H_1(z) H_2(z)$

$$H_2(z) = z^{-1} \left[\frac{1 - 0.6z^{-1}}{1 - 0.4z^{-1}} \right]$$

41. Ans: (a)

Sol:
$$H(z) = \frac{1}{1 - 0.7z^{-1} + 0.13z^{-2}} \quad \text{----- (1)}$$

From the given plot

$$H(z) = \frac{a_0}{1 - a_1 z^{-1} - a_2 z^{-2}} \quad \text{----- (2)}$$

By comparing (1) & (2)

$a_0 = 1, a_1 = 0.7, a_2 = -0.13$

42.

Sol:
$$H(z) = \frac{1}{1 - az^{-1}}$$

$$h(n) = (a)^n u(n)$$

$$\sum_{n=-\infty}^{\infty} |h(n)| < \infty \text{ stable}$$

$$= \infty \text{ unstable}$$

$$\sum_{n=0}^{\infty} (a)^n = \frac{1}{1-a}, |a| < 1$$

$$= \infty, |a| \geq 1$$

For b, c cases system transit from stable to unstable system.

43.

Sol: From signal flow graph

$$H(z) = \frac{1 - \frac{k}{4}z^{-1}}{1 + \frac{k}{3}z^{-1}}$$

$$\text{Pole} = \left| \frac{-k}{3} \right| < 1$$

$$|k| < 3$$

44. **Ans: (c)**

Sol: From signal below graph reduction

$$H(z) = \frac{2 + z^{-1}}{1 + 2z^{-1}} = \frac{2z + 1}{z + 2}$$

45. **Ans: (b)**

$$\text{Sol: } H(e^{j\omega}) = \frac{2e^{j\omega} + 1}{e^{j\omega} + 2}$$

$$|H(e^{j0})| = 1$$

$$|H(e^{j\pi/2})| = 1$$

$$|H(e^{j\pi})| = 1$$

So, All pass filter

46. **Ans: (a)**

$$\text{Sol: } 1 - k[z^{-1} + z^{-2}] = 0$$

$$z^2 - zk - k = 0$$

$$z_{1,2} = \frac{+k \pm \sqrt{k^2 + 4k}}{2}$$

For causal & stable |poles| < 1

$$k = 1 \Rightarrow z_{1,2} = \frac{1 \pm \sqrt{5}}{2} = \frac{1 \pm 2.236}{2}$$

(outside the unit circle)


$$k = 2 \Rightarrow z_{1,2} = \frac{2 \pm \sqrt{12}}{2} = 1 \pm \sqrt{3} = 1 \pm 1.732$$

outside the unit circle

Here $k = [-1, 1/2]$

47.

$$\text{Sol: } H(z) = \frac{-0.54 + z^{-1}}{1 - 0.54z^{-1}}$$

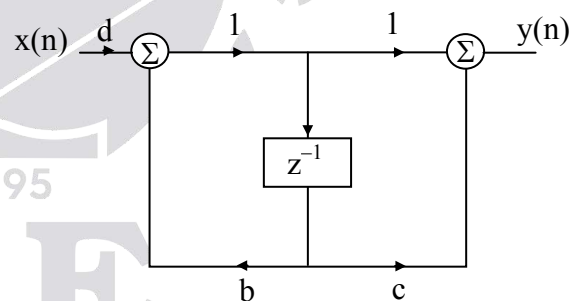

From the above block diagram

$$H(z) = \frac{d + dcz^{-1}}{1 - bz^{-1}}$$

By comparing

$$d = -0.54, c = -\frac{1}{0.54}, b = 0.54$$