



ESE | GATE | PSUs

CIVIL ENGINEERING

TRANSPORTATION ENGINEERING

Volume - 1 : Study Material with Classroom Practice Questions



Transportation Engineering

Solutions for Volume : I Classroom Practice Questions

Chapter- 1 Highway Development and Planning

01. Ans: (d)

Sol:

Road	Length (km)	Number of with population			Utility	Utility/km
		< 2000	2000 – 5000	> 5000		
P	20	8	6	1	$8 \times 0.5 + 6 \times 1 + 1 \times 2 = 12$	$12/20 = 0.6$
Q	28	19	8	4	$19 \times 0.5 + 8 \times 1 + 4 \times 2 = 25.5$	$25.5/28 = 0.91$
R	12	7	5	2	$7 \times 0.5 + 5 \times 1 + 2 \times 2 = 12.5$	$12.5/12 = 1.04$
Weightage factor		0.5	1	2		

∴ RQP

02. Ans: (a)

Sol:

Road Lane	Length (cm)	Number of villages with population ranges				Industrial Product	Utility	Utility/km
		1000-2000	2000-5000	5000-10000	>10000			
P	300	100	80	30	6	200	$100 \times 1 + 80 \times 2 + 30 \times 3 + 6 \times 4 + 200 = 574$	$574/300 = 1.91$
Q	400	200	90	00	8	270	$200 \times 1 + 90 \times 2 + 8 \times 4 + 270 = 682$	$682/400 = 1.70$
R	500	240	110	70	10	315	$240 \times 1 + 110 \times 2 + 70 \times 3 + 10 \times 4 + 315 = 1025$	$1025/500 = 2.05$
S	550	248	112	73	12	335	$248 \times 1 + 112 \times 2 + 73 \times 3 + 12 \times 4 + 335 = 1074$	$1074/550 = 1.95$
Weightage factor		1	2	3	4			

∴ RSPQ

03. Ans: (b)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-1, 2nd Question -pg: 954)



Chapter- 4
Highway Geometric Design - Gradients

Common data for Questions 01 & 02

01. Ans: (b)

$$\text{Sol: Height of crown} = \frac{W}{2n} = \frac{3.5 \times 1000}{2 \times 60} = 29.2 \text{ mm}$$

02. Ans: (d)

$$\text{Sol: Height of crown} = \frac{W}{2n} = \frac{3.5 \times 1000}{2 \times 40} = 43.75 \text{ mm}$$

04. Ans: (a)

$$\text{Sol: G.C} = \frac{30 + R}{R}$$

$$\text{G.C} = \frac{30 + 50}{50} = 1.6$$

$$\text{Max GC} = \frac{75}{50} = 1.5 \quad \therefore \text{GC} = 1.5$$

$$\text{The compensated gradient} = 6\% - 1.5 = 4.5\%$$

05. Ans: (a)

$$\text{Sol: Height of crown} = \frac{W}{2n} = 7.5 \text{ cm}$$

$$\frac{W}{2n} = 7.5$$

$$2n = \frac{9 \times 100}{7.5}$$

$$n = 60 \Rightarrow 1 \text{ in } 60$$

Chapter- 5
Highway Geometric Design
- Sight Distances

01. Ans: (c)

$$\text{Sol: B.D} = 16 \text{ m,}$$

$$f = 0.4$$

$$\frac{V^2}{254f} = 16 \Rightarrow \frac{V^2}{254 \times 0.4} = 16$$

$$V = 40.3 \text{ kmph} \approx 40 \text{ kmph}$$

02. Ans: (c)

$$\text{Sol: } V = 30 \text{ kmph,}$$

$$f = 0.4$$

$$BD_{\text{down}} = 2 BD_{\text{up}}$$

$$\frac{V^2}{254(f - 0.01n)} = \frac{2 \times V^2}{254(f + 0.01n)}$$

$$f + 0.01n = 2f - 0.02n$$

$$0.03n = 0.4$$

$$n = 13.33\%$$

03. Ans: (b)

$$\text{Sol: } V = 72 \text{ kmph, } n = 2\%,$$

$$f = 0.15,$$

$$t = 1.5 \text{ sec}$$

$$\text{SSD} = 0.278 Vt + \frac{V^2}{254(f + 0.01n)}$$

$$= 150 \text{ m}$$



04. Ans: (b)

Sol: $V = 60 \text{ kmph}$

$$t = 2.5 \text{ sec}, f = 0.36$$

$$\frac{0.278 Vt}{V^2 / 254(f + 0.01n)} = \frac{6}{5}$$

$$0.278 \times 60 \times 2.5 = \frac{6}{5} \left[\frac{60^2}{254(0.36 + 0.01n)} \right]$$

$$n = 4.78 \approx 4.8$$

05. Ans: (c)

Sol: $V = 60 \text{ kmph}, t = 2.5 \text{ sec}, f = 0.35$

$$\text{SSD} = 0.278 Vt + \frac{V^2}{254f}$$

$$= 0.278 \times 60 \times 2.5 + \frac{60^2}{254 \times 0.35} = 82.1 \text{ m}$$

$$\text{SSD for single two way traffic} = 2 \times \text{SSD} \\ = 2 \times 82.1 = 164.2 \text{ m}$$


06. Ans: (c)

Sol: $\text{ISD} = 2 \times 80 = 160 \text{ m}$

07. Ans: (83 kmph)

Sol: There are 3 phases in the problem

1. Driver lifts foot from accelerator and moves it to brake pedal – the velocity is uniform.
2. Deceleration increases from zero to maximum
3. Braking system locks the wheels and deceleration assumed to be constant until vehicle strikes the stationary vehicle

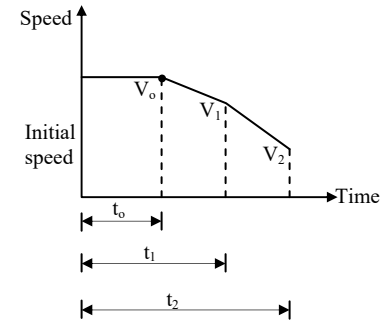

$$A = fg = 0.75 \times 9.81 = 7.35 \text{ m/s}^2$$

During 1st phase, assume driver reaction time 0.5 sec

$$v_o = v_1 + \frac{a}{2}(t_1 - t_o)$$

During 3rd phase, deceleration assumed to be uniform

$$v_1 = \sqrt{v_2^2 + 2aS} = \sqrt{11.18^2 + 2 \times 7.35 \times 27.45}$$

$$= 22.98 \text{ m/s} = 82.76 \text{ kmph}$$

$$v_o = 82.76 + \frac{7.35}{2}(0.8 - 0.5)$$

$$= 83 \text{ kmph}$$

08. Ans: (13.6 m)

Sol: $\frac{dv}{dt} = 3 - 0.04v$

$$A = 3, \beta = 0.04, t = 5 - 0.75 = 4.25$$

Width of intersection = 7.5 m

Equation for distance as a function of time

$$x = \frac{\alpha t}{\beta} - \frac{\alpha}{\beta^2}(1 - e^{-\beta t}) + \frac{v_o}{\beta}(1 - e^{-\beta t})$$

$v_o = \text{initial speed} = 0$



$$= \frac{3(4.25)}{0.04} - \frac{3}{(0.04)^2} (1 - e^{-0.04 \times 4.25}) + 0$$

$$x = 25.62 \text{ m}$$


Intersection + length of car

$$7.5 + 6.1 = 13.6 \text{ m}$$

∴ He can clear the intersection

09. Ans: T = 7.13 sec, V = 138 kmph

Sol:

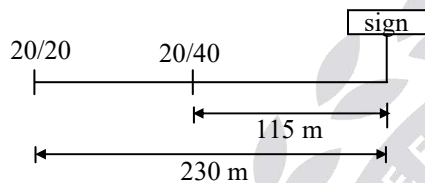

$$\frac{20}{20} \rightarrow 230 \text{ m}$$

$$\frac{20}{40} \rightarrow x$$

$$x = 115 \text{ m}$$

In question they give it will take 3 sec to read sign

So

$$\begin{aligned} \text{Speed of } \frac{20}{40} \text{ vision driver} &= \frac{115}{3} \text{ m/sec} \\ &= 138 \text{ kmph} \end{aligned}$$

For speed of $\frac{20}{40}$ vision driver is 58kmph

$$\text{i.e. } 58 \times \frac{5}{18} = 16.11 \text{ m/sec}$$


$$\text{Velocity} = \frac{D}{T}$$

$$T = \frac{115}{16.11}$$

$$T = 7.13 \text{ sec}$$

10. Ans: 142

Sol: For normal driver with 6/6 vision the position of sign post is shown below.

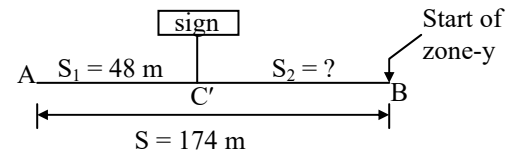

$$S_2 = 174 - 48 = 126 \text{ m}$$

S_2 = The distance from sign post to the start of zone-y


S_1 = Distance traveled by the vehicle during perception – reaction time for 6/6 vision driver

S = total distance required to reduce the speed to 30 kmph from design speed.

For a driver with 6/9 vision (with defective sight), the distance of sign post should be nearer as compared to driver with normal sight.

$$\therefore \text{Modified } S_1 = \frac{6}{9} \times 48 = 32 \text{ m}$$

The position of sign post is as shown below

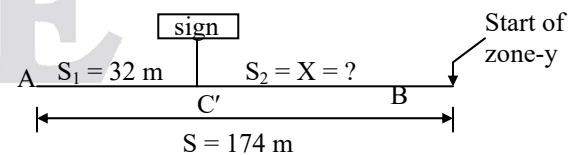

The distance from modified position of sign post to the start of zone-y (i.e. C'B) = $174 - 32 = 142 \text{ m}$.

11. Ans: 900.79

Sol: Refer previous GATE solutions Book

(Cha-2, Two marks 9th Question -pg: 821)



12. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-5, 5th Question - pg: 963)

13. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-5, 9th Question - pg: 964)

Chapter- 6
Highway Geometric Design
- Overtaking Sight Distance

Common data for Questions 01, 02 & 03

01. Ans: (c)

Sol: $V = 80 \text{ kmph} = 2.5 \text{ kmph/sec}$

$$V_b = 50 \text{ kmph} \quad S = 16 \text{ m}$$

$$t = 2 \text{ sec}$$

$$T = \sqrt{\frac{14.4s}{A}} = \sqrt{92.16 \text{ sec}}$$

$$= 9.6 \text{ sec}$$

$$\text{OSD} = d_1 + d_2$$

$$= 0.278 V_b t + (0.278 V_b T + 2s)$$

$$= 193.24 \text{ m}$$

02. Ans: (d)

Sol: $\text{OSD} = d_1 + d_2 + d_3$

$$= 0.278 V_b t + (0.278 V_b T + 2s) + 0.278 V T$$

$$= 406.74 \text{ m}$$

03. Ans: (c)

Sol: Since division is there

$$\text{OSD} = d_1 + d_2 = 193.24 \text{ m}$$

Common data for Questions 04 & 05

04. Ans: (c)

Sol: $V = u + at$

$$u = 100 \text{ kmph}$$

$$= 27.7 \text{ m/s}$$

$$= 27.7 + 0.8 \times 5$$

$$V = 31.72 \text{ m/s}$$

$$V^2 - u^2 = 2 \times as$$

$$(31.7)^2 - (27.7)^2 = 2 \times 0.8 \times S$$

$$S = 148.5 \text{ m}$$

Distance traveled in next 2 sec

$$= 323 - 148.5$$

$$S = 174.5 \text{ m}$$

Now, $u = 31.7 \text{ m/s}$

$$S = ut + \frac{1}{2} at^2$$

$$174.5 = (31.7 \times 5) + \left(\frac{1}{2} \times a \times 5^2 \right)$$

$$a = 1.2 \text{ m/sec}^2$$

05. Ans: (d)

Sol: Distance traveled in overtaking process (d_2)

$$d_2 = (V_b T + 2s) \quad S_1 = 25 \text{ m}$$

$$= (V_b T + S_1 + S_2) \quad S_2 = 20 \text{ m}$$

$$T = \sqrt{\frac{4s}{a}} = 10.6 \text{ sec}$$

$$d_2 = (0.278 \times 100 \times 10) + (25 + 20)$$

$$= 323 \text{ m}$$



Common data for Questions 06 & 07

06. Ans: (c)

Sol: $OSD = d_1 + d_2$

$$V = 22.22 \text{ m/s} \quad V_b = 16.67 \text{ m/s}$$

$$a = 0.7 \text{ m/s}^2$$

$$S = (0.7 V_b + l) = 17.67 \text{ m}$$

$$T = \sqrt{\frac{4s}{a}} = 10.05 \text{ sec} \quad t = 2 \text{ sec}$$

$$OSD = d_1 + d_2 + d_3$$

$$= V_b t + (V_b T + 2s) + VT$$

$$= 236.21 + (22.22 \times 10.05)$$

$$= 459.521 \text{ m}$$

$$\approx 460 \text{ m}$$

07. Ans: (d)

Sol: Desirable length of OZ = 5 OSD

$$= 5 (d_1 + d_2 + d_3)$$

$$= 5 \times 460$$

$$\approx 2300 \text{ m}$$


Chapter- 7

Highway Geometric Design - Horizontal Curves

Common data for Questions 01 & 02

01. Ans: (a)

$$\text{Sol: } e = \frac{V^2}{225R} = \frac{65^2}{225 \times 600} = 0.031$$



$$E = e w = 0.031 \times 7 = 0.22 \text{ m}$$

$$\text{w.r.t centre line} = 0.11 \text{ m}$$

02. Ans: (b)

Sol: w.r.t inner edge ; $E = 0.22 \text{ m}$

03. Ans: (c)

$$\text{Sol: } e_{\text{cal}} = \frac{V^2}{225R} = \frac{65^2}{225 \times 125} = 0.15$$

$$e_{\text{cal}} > 0.07$$

$\therefore V = 65 \text{ kmph}$ is not suitable

$$0.07 + f = \frac{V^2}{127R} \rightarrow f = \frac{65^2}{127 \times 125} - 0.07$$

$$= 0.196 > 0.15$$

V_a should be calculated

$$0.07 + 0.15 = \frac{V_a^2}{127 \times 125}$$

$$V_a = 59.1 \text{ kmph}$$

Common data for Questions 04 to 06

04. Ans: (b)

$$\text{Sol: } e + f = \frac{V^2}{127R}$$

$$e + 0.15 = \frac{100^2}{127 \times 500}$$

$$\Rightarrow e = 0.00748 = 0.74\%$$

05. Ans: (b)

$$\text{Sol: } f = \frac{V^2}{127R} = \frac{100^2}{127 \times 500} = 0.157 \approx 0.16$$



06. Ans: (c)

$$\text{Sol: } f = 0; \quad e + 0 = \frac{100^2}{127 \times 500}$$

$$\Rightarrow e = 15.75\%$$

07. Ans: (a)

$$\text{Sol: } e = \frac{V^2}{225R} = \frac{60^2}{225 \times 500} = 0.032 = 3.2\%$$

08. Ans: (b)

$$\text{Sol: } R_{\text{Ruling}} = \frac{V^2}{127(f + e)}$$

$$= \frac{100^2}{127(0.07 + 0.13)}$$

$$= 393.7 \text{ m} \approx 395 \text{ m}$$

09. Ans: (a)

$$\text{Sol: } b = 2.4 \text{ m}$$

$$h = 4.2 \text{ m}$$

$$\frac{b}{2h} = \frac{2.4}{2 \times 4.2} = 0.286 > f$$

$$\frac{b}{2h} > f$$

∴ Lateral skidding occur first

11. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-6, 9th Question - pg: 969)

12. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-6, 10th Question - pg: 969)

Chapter- 8

Horizontal Curves (Extra Widening)

Common data for Questions 01 & 02

01. Ans: (d)

$$\text{Sol: } e + f = \frac{V^2}{127R}$$

$$R_{\text{Ruling}} = \frac{76^2}{127 \left(\frac{1}{15} + 0.15 \right)}$$

$$= 209.9 \text{ m}$$

02. Ans: (d)

$$\text{Sol: } W_e = \frac{n \ell^2}{2R} + \frac{V}{9.5\sqrt{R}}$$

$$= \frac{2 \times 7^2}{2 \times 209} + \frac{76}{9.5\sqrt{209}}$$

$$= 0.787 \text{ m}$$

$$\therefore \text{Total width} = 7 + 0.787$$

$$= 7.78 \text{ m}$$

03. Ans: (c)

$$\text{Sol: } W_e = \frac{n \ell^2}{2R} + \frac{V}{9.5\sqrt{R}}$$

$$= \frac{2 \times 8^2}{2 \times 300} + \frac{100}{9.5\sqrt{300}}$$

$$= 0.821 \text{ m}$$



04. Ans: (c)

Sol: Given

$$W_m = 0.096$$

$$\frac{l^2}{2R} = 0.096 \Rightarrow R = 226.87 \text{ m}$$

$$W_e = W_m + W_{ps} = \frac{n l^2}{2R} + \frac{V}{9.5\sqrt{R}}$$

$$= \frac{2 \times 6.6^2}{2 \times 226.87} + \frac{80}{9.5\sqrt{226.87}}$$

$$= 0.75 \text{ m}$$

Chapter- 9
Set Back Distance and
Curve Resistance

01. Ans: (a)

Sol: Set back or the clearance is the distance required from the centre line of horizontal curve to an obstruction on the inner side of the curve to provide adequate sight distance at a horizontal curve.

02. Ans: (c)

$$\text{Sol: } m = \frac{S^2}{8R} \Rightarrow R = \frac{80^2}{8 \times 10} = 80 \text{ m}$$

Common data for Questions 03 & 04

03. Ans: (c)

Sol: $L = 180 \text{ m}$ $S = 80 \text{ m}$

$$L > S$$

$$m = \frac{S^2}{8R} = \frac{80^2}{8 \times 360} = 2.22 \text{ m}$$

Width of pavement is not indicated

$$m = R - R \cos(\alpha/2)$$

$$\frac{\alpha}{2} = \frac{180S}{2\pi R} = \frac{180 \times 80}{2\pi \times 360} = 6.36$$

$$m = 360 - 360 \cos(6.36) = 2.2 \text{ m}$$

04. Ans: (c)

Sol: $L = 180 \text{ m}$ $S = 250 \text{ m}$

$$L < S$$

$$m = R - R \cos\left(\frac{\alpha}{2}\right) + \frac{S-L}{2} \sin\left(\frac{\alpha}{2}\right)$$

$$\frac{\alpha}{2} = \frac{180L}{2\pi R} = \frac{180 \times 180}{2\pi \times 360} = 14.32$$

$$m = 360 - 360 \cos(14.32) + \frac{250-180}{2} \sin(14.32) = 19.85 \text{ m}$$

Common data for Questions 05 & 06

05. Ans: (c)

$$\text{Sol: } SSD = 0.278 V t + \frac{V^2}{254f}$$

$$= (0.278 \times 80 \times 2.4) + \frac{80^2}{254 \times 0.355}$$

$$= 124.35 \text{ m} \approx 125 \text{ m}$$

06. Ans: (d)

Sol: $S = 125 \text{ m}$

$$d = \frac{W}{4} = \frac{7}{4} = 1.75 \text{ m}$$

$$\frac{\alpha}{2} = \frac{180S}{2\pi(R-d)} = \frac{180 \times 125}{2\pi(200-1.75)} = 18.06$$



$$m = R - (R - d) \cos\left(\frac{\alpha}{2}\right)$$

$$= 11.52 \text{ m}$$

$$m^1 = m - d$$

$$= 11.52 - 1.75 = 9.77 \text{ m}$$

(or)

In approximately

$$m = \frac{S^2}{8R} = 9.76 \text{ m}$$

Problems on Curve Resistance

01.

Sol: Let 'T' is the original Tractive force

$$\text{loss of tractive force} = T(1 - \cos\theta)$$

$$= T(1 - \cos 45^\circ)$$

Ratio of loss of Tractive force to original is

$$= 0.243$$

02.

Sol: Curve resistance = $T(1 - \cos\theta)$

$$= T(1 - \cos 30^\circ)$$

$$= 0.134 T$$

03.

Sol: Curve resistance = $T(1 - \cos\theta)$

$$= T(1 - \cos 90^\circ)$$

$$= 0$$

Chapter- 10 Highway Geometric Design -Transition Curves

Common data for Questions 01 & 02

01. Ans: (d)

$$\begin{aligned} \text{Sol: } L &= \frac{0.0215 V^3}{CR} \\ &= \frac{0.0215 \times 60^3}{0.6 \times 200} = 38.7 \text{ m} \end{aligned}$$

Considering N value

$$\begin{aligned} L &= eN(W + W_e) = 0.07 \times 100(7 + 0.2) \\ &= 50.4 \text{ m} \end{aligned}$$

$$L = \frac{2.7 V^2}{R} = \frac{2.7 \times 60^2}{200} = 48.6 \text{ m}$$

\therefore The length of T.C = 50.4 m
(from the 3 values maximum value)

02. Ans: (d)

$$\text{Sol: } S = \frac{L^2}{24R} = \frac{(50.4)^2}{24 \times 200} = 0.53 \text{ m}$$

Common data for Questions 03 & 04

03. Ans: (c)

$$\begin{aligned} \text{Sol: } C &= \frac{80}{75 + V} = \frac{80}{75 + 80} \\ &= 0.516 \text{ m/sec}^3 \end{aligned}$$



04. Ans: (a)

Sol: Considering 'C' value

$$L = \frac{0.0215 V^3}{CR} = \frac{0.0215 \times 80^3}{0.516 \times 900}$$

$$= 23.7 \text{ m}$$

Considering 'N' value

$$e = \frac{V^2}{225 R} = \frac{80^2}{225 \times 900} = 0.0316$$

(for mixed traffic)

$$L = \frac{eN}{2}(W + W_e)$$

$$= \frac{0.0316 \times 150}{2} \times 7 = 16.59 \text{ m}$$

Considering terrain

$$L = \frac{2.7 V^2}{R} = \frac{2.7 \times 80^2}{900} = 19.2 \text{ m}$$

∴ Length of T.C = 23.7 m

05. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-9, 9th Question - pg: 977)

06. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-9, 10th Question - pg: 977)

07. Ans: (a)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-9, 11th Question - pg: 977)

Chapter- 11 Highway Geometric Design -Vertical Curves

01. Ans: (b)

Sol: Length of summit parabolic curve,

Assume $L > S$

$$L = \frac{NS^2}{(\sqrt{2H} + \sqrt{2h})^2}$$


$$= \frac{0.09 \times 120^2}{(\sqrt{2 \times 1.5} + \sqrt{2 \times 0.15})^2} = 249 \text{ m}$$

02. Ans: (d)

Sol: $N = 4 - (-2) = 6\%$

6% → 150 m

4% → $\frac{4}{6} \times 150 = 100 \text{ m}$



03. Ans: (c)

Sol: $N = \frac{1}{50} - \left(-\frac{1}{100}\right) = 0.03 = 3\%$

1% → 100 m

3% → $\frac{3}{1} \times 100 = 300 \text{ m}$



Common data for Q 04 & 05

04. Ans: (c)

$$\text{Sol: } N = \frac{1}{25} - \left(-\frac{1}{50}\right) = 0.06 = 6\%$$

$$S = 180 \text{ m}$$

Take $L > SSD$

$$L = \frac{NS^2}{4.40} = \frac{0.06 \times 180^2}{4.4} = 441.8 \text{ m}$$

$$\approx 442 \text{ m}$$

05. Ans: (b)

Sol: 6% → 442 m

$$4\% \rightarrow \frac{4}{6} \times 442 = 294.66 \text{ m}$$

$$= 294.66$$

06. Ans: (b)

$$\text{Sol: } N = \frac{1}{100} - \left(\frac{-1}{120}\right) = 0.0183$$

Assume $L > OSD$

$$L = \frac{NS^2}{9.6} = \frac{0.0183 \times 470^2}{9.6}$$

$$= 421.09 \text{ m}$$

$$421.09 < 470$$

Take $L < OSD$

$$L = 2S - \frac{9.6}{N} = 2 \times 470 - \frac{9.6}{0.0183}$$

$$= 406.66 \text{ m}$$

07. Ans: (a)

Sol: Refer previous GATE solutions Book
(Cha-2.8, Two marks 5th Question -pg:
830)

08. Ans: (c)

Sol: Take $L \geq OSD$

$$L = \frac{NS^2}{9.6}$$

$$= \frac{0.018 \times 500^2}{9.6}$$

$$= 468.75 \text{ m} < 500 \text{ m}$$

Take $L < OSD$

$$L = 2S - \frac{9.6}{N}$$

$$= 2 \times 500 - \frac{9.6}{0.018}$$

$$= 466.67 \text{ m} < 500 \text{ m}$$

∴ Length of summit curve,

$$L \approx 467 \text{ m}$$

09. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2)
solutions Book (Cha-10, 4th Question -
pg: 981)



Chapter- 12
Highway Geometric Design
-Valley Curves

Common data for Questions 01 to 03

01. Ans: (c)

Sol: $-n_1 = \frac{1}{25}$ $V = 100 \text{ kmph}$

$n_2 = \frac{1}{20}$ $C = 0.6 \text{ m/s}^3$

$SSD = 180 \text{ m}$

$N = |(-n_1 - n_2)| = n_1 + n_2$

$= \frac{1}{25} + \frac{1}{20} = 0.09$

(a) $L = 0.38 (NV^3)^{1/2}$

$= 0.38 (0.09 \times 100^3)^{1/2}$

$= 114$

$L > SSD$

(b) $L = \frac{NS^2}{1.5 + (0.035S)} = \frac{0.09 \times 180^2}{1.5 + 0.035(180)}$

$= 373.86 \text{ m} \approx 374 \text{ m}$

02. Ans: (b)

Sol: $I = \frac{1.6NV^2}{L}$

$= \frac{1.6 \times 0.09 \times 100^2}{374} = 3.85$

03. Ans: (a)

Sol: For 9% $\rightarrow 373.86$

For 4 % $\rightarrow ?$

$= \frac{4 \times 374.0}{9} = 166.22 \text{ m}$

≈ 166

Chapter- 13
Highway Materials and Testing

01. Ans: (a)

Sol: $k_1 d_1 = k_2 d_2$

$(200) \times (30) = (k_2)(75)$

$k_2 = k_{\text{of soil}} = 80 \text{ N/cm}^3$

03. Ans: (a)

Sol: $E = \frac{1.18 \text{ Pa}}{\delta} = \frac{1.18 \times 800 \times (75/2)}{2.5 \times 10^{-1}}$

$= 141600 \text{ N/cm}^2$

$= 141.6 \text{ kN/cm}^2$

04.

Sol: Total weight = $825 + 1200 + 325 + 150 + 100$

$= 2600 \text{ gm}$

% wt of material ;

$A_1 \rightarrow \frac{825}{2600} \times 100 = 31.7\%$

$A_2 \rightarrow \frac{1200}{2600} \times 100 = 46.15\%$



$$A_3 \rightarrow \frac{325}{2600} \times 100 = 12.5\%$$

$$A_4 \rightarrow \frac{150}{2600} \times 100 = 5.7\%$$

$$\text{Bitumen} \rightarrow \frac{100}{2600} \times 100 = 3.8\%$$

$$G_t = \frac{100}{\left(\frac{w_1}{G_1} + \frac{w_2}{G_2} + \frac{w_3}{G_3} + \frac{w_4}{G_4} + \frac{w_5}{G_5} \right)}$$

$$= \frac{100}{\left[\frac{31.7}{2.63} + \frac{46.15}{2.51} + \frac{12.5}{2.46} + \frac{5.7}{2.43} + \frac{3.8}{1.05} \right]}$$

$$= 2.41$$

$$G_m = \frac{1100}{475} = 2.31$$

$$(a) V_a = \frac{G_t - G_m}{G_t} \times 100 = \frac{2.41 - 2.31}{2.41} \times 100$$

$$= 4.15\%$$

$$(b) V_b = \frac{w_b}{G_b} \times G_m = \frac{3.80}{1.05} \times 2.31 = 8.36$$

$$(c) VMA = V_v + V_b = 4.15\% + 8.36$$

$$= 12.51\%$$

$$VFB = \frac{V_b}{VMA} \times 100$$

$$= \frac{8.36}{12.51} \times 100$$

$$= 67\%$$

05. Ans: $G_f = 2.48, G_m = 2.30$

$$\text{Sol: } G_t = \frac{100}{\frac{w_1}{G_1} + \frac{w_2}{G_2} + \frac{w_3}{G_3}}$$

$$= \frac{100}{\frac{60}{2.72} + \frac{35}{2.66} + \frac{5}{1.0}} = 2.48$$

$$V_a = 7\%$$

$$V_a = \frac{G_t - G_m}{G_t} \times 100$$

$$\Rightarrow 7 = \frac{2.48 - G_m}{2.48} \times 100$$

$$G_m = 2.30$$

06. Ans: (c)

$$\text{Sol: } \text{CBR}(\%) = \frac{P_{2.5}}{P_{st 2.5}} \times 100$$

$$= \frac{60.5}{1370} \times 100 = 4.4\%$$

$$\text{CBR}(\%) = \frac{P_5}{P_{st 5}} \times 100$$

$$= \frac{80.5}{2055} \times 100$$

$$= 3.92\%$$

Adopt higher one.

$$\therefore \text{CBR}(\%) = 4.4$$

07. Ans: (b)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 4th Question - pg: 986)



08. Ans: (a)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 5th Question - pg: 986)

09. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 10th Question - pg: 987)

10. Ans: (a)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 21st Question - pg: 989)

11. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 30th Question - pg: 990)

12. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-12, 56th Question - pg: 995)

Chapter- 14 Pavement Design

01. Ans: 34.22 msa

Sol: Assume lane distribution factor, $F = 1$

$$A = 1000 \left(1 + \frac{7.5}{100} \right)^5 = 1435.6 \text{ CVPD}$$

$$N = \frac{365 \left[(1 + 0.075)^{15} - 1 \right] \times 1435.6 \times 2.5 \times 1}{0.075}$$

$$= 34.22 \text{ msa}$$

02. Ans: (c)

$$\text{Sol: } N = \frac{365 \left[(1 + r)^n - 1 \right] \times A \times D \times F}{r}$$

Assume $F = 0.75$

$$N = \frac{365 \left[(1 + 0.1)^{15} - 1 \right] \times 1610.51 \times 3 \times 0.75}{0.1}$$

$$= 42.02 \text{ msa}$$

$$A = P(1+r)^n$$

$$= 1000 (1+0.1)^5 = 1610.51$$

03. Ans: (b)

Sol: $N = N_1 + N_2$

$$= \frac{365 \left[(1 + r)^n - 1 \right] \times A \times D \times F}{r}$$

$$N = \frac{365 \left[(1 + 0.075)^{10} - 1 \right] \left[2000 \times 5 + 200 \times 6 \right]}{0.075}$$

$$= 57.8 \text{ msa}$$



04. Ans: F = 3.74, N = 25.86 msa

Sol:

S.No	Wheel load	% Total Traffic (Ni)	EF [Fi]
1	2268	25	1
2	2722	12	2.07
3	3175	9	3.84
4	3629	6	6.55
5	4082	4	10.49
6	4536	2	16
7	4490	1	23.43
		$\Sigma N_i = 59\%$	

$$\Sigma EF = \left(\frac{\text{Actual load}}{\text{Standard load}} \right)^4$$

$$(1) \rightarrow EF_1 = \left(\frac{2268}{2268} \right)^4 = 1$$

$$(2) \rightarrow EF_2 = \left(\frac{2722}{2268} \right)^4 = 2.07 \dots\dots$$

$$VDF = \frac{\Sigma N_i f_i}{\Sigma N_i} = \frac{25 \times 1 + 12 \times 2.07 + 9 \times 3.84 + 6 \times 6.55 + 4 \times 10.49 + 2 \times 16 + 1 \times 23.23}{59}$$

$$VDF = 3.74$$

Given LDF = 0.4

Total Traffic = 1860 cv/day

$$\therefore \text{Total commercial traffic (A)} = 1860 \times \frac{59}{100} = 1094.4 \text{ cv/day}$$

$$N = \frac{365 \left((1 + 0.075)^{20} - 1 \right) (1094.4 \times 0.4 \times 3.74)}{0.075}$$

$$N = 25.94 \times 10^6 \text{ csa} = 25.87 \text{ msa}$$



05. Ans: 1.26

Sol:

Equivalent axle load and vehicle damage factor (VDF)

Axle load	Number of load repetition	Equivalent factor	Equivalent axle load
80	1000	$(80/80)^4 = 1$	1000
160	100	$(160/80)^4 = 16$	1600
40	1000	$(40/80)^4 = 0.0625$	62.5
			2662.5

∴ The equivalent axle load = 2662.5 kN

$$\text{VDF} = \frac{(1000 \times 1) + (100 \times 16) + (1000 \times 0.0625)}{1000 + 100 + 1000}$$
$$= 1.26$$

06. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-13, 2nd Question -pg: 1005)

07. And: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-13, 6th Question -pg: 1005)

08. And: (b)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-13, 11^h Question -pg: 1006)

09. And: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-13, 15th Question -pg: 1007)

10. And: (a)

Sol: Refer previous ESE-Obj-(Vol-2) solutions Book (Cha-13, 30th Question -pg: 1010)



Chapter- 15
Rigid Pavements

01. Ans: (a)

$$\text{Sol: } L = \frac{\delta'}{\alpha(t_2 - t_1)} = \frac{2.5/2}{10 \times 10^{-6}(45 - 10)} = 3571.42 \text{ cm}$$

$$= 35.71 \text{ m}$$

($\delta' = 50\%$ of gap expansion joint)

Common data for Questions 02 & 03

02. Ans: (a)

$$\text{Sol: } \sigma_{w(e)} = \frac{C_x E \alpha t}{2}$$

$$= \frac{0.92 \times 3 \times 10^5 \times 10 \times 10^{-6} \times 16.2}{2}$$

$$= 22.35 \text{ kg/cm}^2$$

03. Ans: (d)

$$\text{Sol: } l = \left[\frac{Eh^3}{12k(1-\mu^2)} \right]^{1/4}$$

$$= \left[\frac{3 \times 10^5 \times 20^3}{12 \times 8(1-0.15^2)} \right]^{1/4} = 71.1 \text{ cm}$$

$$\sigma_{w(c)} = \frac{E \alpha t}{3(1-\mu)} \sqrt{\frac{a}{l}}$$

$$= \frac{3 \times 10^5 \times 10 \times 10^{-6} \times 16.2}{3(1-0.15)} \times \sqrt{\frac{15}{71.1}}$$

$$= 8.75 \text{ kg/cm}^2$$

Common data for Questions 04 & 05

04. Ans: (a)

$$\text{Sol: } A_s = \frac{B h f r_c}{\sigma_s \times 100} = \frac{1/2 \times 7.2 \times 18 \times 1.5 \times 2400}{1700 \times 100}$$

$$= 137.22 \text{ cm}^2/\text{m}$$

$$\text{Spacing} = \frac{100 \times A}{A_s} = \frac{100 \times (\pi/4 \times 10^2)}{137.22}$$

$$= 57.23 \text{ cm} \approx 550 \text{ mm c/c}$$

05. Ans: (b)

$$\text{Sol: } L = \frac{d \sigma_s}{2 \sigma_b} = \frac{1 \times 1700}{2 \times 24.6} = 34.55 \text{ cm} \approx 35 \text{ cm}$$

Common data for Questions 06 & 07

06. Ans: (c)

$$\text{Sol: } L = \frac{2 \sigma_c}{\gamma_c f} = \frac{2 \times 0.8 \times 10^4}{2400 \times 1.5} = 4.4 \text{ m c/c}$$

07. Ans: (c)

$$\text{Sol: } L = \frac{200 \sigma_s A_s}{B h \gamma_c f}$$

$$= \frac{200 \times 1200 \times \frac{\pi}{4} \times (10 \times 10^{-1})^2}{3.75 \times 20 \times 2400 \times 1.5} \times \text{no. of bars}$$

$$= 8.72 \text{ c/c}$$

$$\text{No. of bars} = \frac{\text{width}}{0.3} = \frac{3.75}{0.3} = 12.5 \approx 13 \text{ No's}$$



08. Ans: (a)

$$\text{Sol: } \sigma_f = \frac{\gamma_c f L}{2 \times 10^4} = \frac{2400 \times 4 \times 1.2}{2 \times 10^4}$$

$$= 0.576 \text{ kg/cm}^2$$

09. Ans: (b)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-14, 1st Question -pg: 1016)

10. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-14, 5th Question -pg: 1016)

11. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-14, 8th Question -pg: 1017)

12. Ans: (d)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-14, 12th Question -pg: 1017)

13. Ans: (b)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-14, 24th Question -pg: 1019)

Chapter- 16
Traffic Engineering

01. Ans: (a)

Sol: Time mean speed

$$= \frac{50 + 40 + 60 + 54 + 45}{5}$$

$$(V_t) = 49.8 \text{ kmph}$$

$V_s \Rightarrow$ space mean speed

$$\frac{1}{V} = \frac{1}{50} + \frac{1}{40} + \frac{1}{60} + \frac{1}{54} + \frac{1}{45}$$

$$V = 9.76$$

$$V_s = V \times n = 9.76 \times 5 = 48.80 \text{ kmph}$$

02. Ans: (a)

Sol:

Speed Range (m/s)	Frequency PCU/hr (q)	Mid-pt speed (v)	qv	q/v
2.5	1	2.5	2.5	0.4
7.5	4	7.5	30	0.533
11.5	0	11.5	0	0
15.5	7	15.5	108.5	0.45
	$\Sigma q = 12$		$\Sigma qv = 142.0$	$\Sigma \frac{q}{v} = 1.38$

$$V_t = \frac{\sum qv}{\sum q} = \frac{142}{12} = 11.75 \text{ m/s}$$

$$V_s = \frac{\sum q}{\sum (q/v)} = \frac{12}{1.38} = 8.69 \text{ m/s}$$

Always the time mean speed is more than space mean speed i.e, $V_t > V_s$



03. Ans: 41.8 & 40.91

Sol: Speed of vehicle-A = $\frac{1}{1.2/60} = 50$ kmph

Speed of vehicle-B = $\frac{1}{1.5/60} = 40$ kmph

Speed of vehicle-C = $\frac{1}{1.7/60} = 35.3$ kmph

Average travel speed

$$(V_t) = \frac{50 + 40 + 35.3}{3}$$

$$= 41.8 \text{ kmph}$$

Space mean speed (V_s) = $\frac{n}{\sum \left(\frac{1}{v_i} \right)}$

$$= \frac{3}{\frac{1}{50} + \frac{1}{40} + \frac{1}{35.3}}$$

$$= 40.91 \text{ kmph}$$

04. Ans: 4000 veh/hr

Sol: Design flow rate = $\frac{q}{pHF}$

$$PHF = \frac{q}{4(q_{15})}$$

Volume during peak 15 min (q_{15}) = 1000

Peak hour volume (q)

$$= 700 + 812 + 1000 + 635$$

$$= 3147$$


$$\therefore \text{Design flow rate} = \frac{3147}{\frac{3147}{4000}} \approx 4000 \text{ veh / hr}$$

05.

Sol: Total frequency = 100

$$\% \text{ frequency} = \frac{10}{1000} \times 100 = 1$$

- (i) 85th percentile speed is considered as a safe speed from graph $V_{85} = 65$ kmph
- (ii) 98th percentile speed is considered as a design speed from graph $V_{98} = 85$ kmph
- (iii) 15th percentile speed is considered as a minimum speed on the highway from graph $V_{15} = 35$ kmph

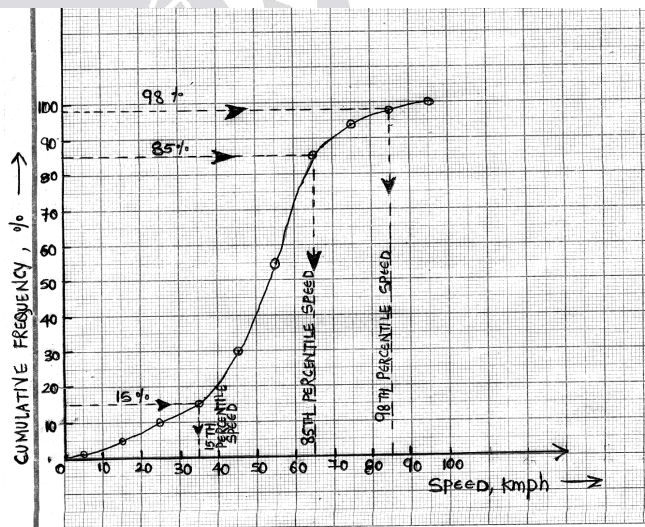

06. Ans: (c)

Sol: $SSD = 0.278 Vt + \frac{V^2}{254f}$

$$= 0.278 \times 65 \times 2.5 + \frac{65^2}{254 \times 0.4}$$

$$= 86.7 \text{ m}$$

$$S = SSD + L = 86.7 + 5 = 91.7 \text{ m}$$

$$C = \frac{1000 V}{S} = \frac{1000 \times 65}{91.7}$$

$$\approx 709 \text{ veh / hr / lane}$$



07. Ans: (b)

Sol: $t = 0.7$ Assume

$$SSD = 0.278 Vt = 7.78 \text{ m}$$

$$S = SSD + L = 12.78 \text{ m}$$

$$C = \frac{1000 V}{S} = 3129$$

$$\approx 3130 \text{ veh/hr}$$

08. Ans: (b)

Sol: $S = SSD + L = 20 + 6 = 26 \text{ m}$

$$C = \frac{1000 V}{S} = \frac{1000 \times 40}{26} = 1538 \text{ veh/hr/lane}$$

09. Ans: (c)

Sol:

Given standard deviation (SD) = 8.8 kmph
mean speed $\bar{x} = 33 \text{ kmph}$

$$\begin{aligned} \text{Coefficient of variation} &= \frac{SD}{\bar{x}} = \frac{8.8}{33} \\ &= 0.2666 \end{aligned}$$

10. Ans: (b)

Sol: $q = uk$

$$U = U_{sf} \left[1 - \frac{k}{k_j} \right]$$

$$\therefore q = U_{sf} \left[1 - \frac{k}{k_j} \right] k = U_{sf} \left[k - \frac{k^2}{k_j} \right]$$

$$\text{For max traffic flow ; } \frac{d_q}{d_k} = 0$$

$$\frac{d_q}{d_k} = U_{sf} \left[1 - \frac{2k}{k_j} \right] = 0$$

$$1 - \frac{2k}{k_j} = 0$$

$$k_j = 2k$$

$$U_{sf} = 70 \text{ km/hr}$$

$$k_j = \frac{1000}{s} = \frac{1000}{7}$$

$$k = k_j/2$$

$$q = U_{sf} \left[k - \frac{k^2}{k_j} \right] = U_{sf} \left[k - \frac{k}{2} \right]$$

$$= U_{sf} \left[\frac{k_j}{2} - \frac{k_j}{4} \right]$$

$$= U_{sf} \left[\frac{k_j}{4} \right]$$

$$q = 70 \times \frac{1000}{7} \times \frac{1}{4}$$

$$= 2500 \text{ veh/hr}$$

11. Ans: (d)

Sol: $V_{sf} = 80 \text{ kmph}$

$$k_j = 100 \text{ veh/km}$$

$$q_{\max} = \frac{V_{sf} \times k_j}{4} = \frac{80 \times 100}{4} = 2000 \text{ veh/hr}$$

$$V_s = \frac{V_{sf}}{2} \text{ (the speed corresponding to}$$

$$q_{\max} \text{ is } V_{s \max}) = \frac{80}{2} = 40 \text{ kmph}$$



12. Ans: 33 veh/km & 149 veh/km

Sol: $q_m = 1700$ veh/hr

$$k_m = \frac{1000}{S} = \frac{1000}{5.5} = 181.81$$

$$q_m = \left(\frac{V_m}{2}\right)\left(\frac{k_m}{2}\right)$$

$$1700 = \left(\frac{V_m}{2}\right)\left(\frac{181.81}{2}\right)$$

$$v_m = 37.40 \text{ kmph}$$

For $q = 1000$ veh/hr

$$\tan \theta = \frac{V_m}{k_m}$$

$$v = \frac{37.4}{181.81} \times (181.81 - k)$$

For normal condition

$$q = v \cdot k$$

$$1000 = \frac{37.4}{181.81} \times (181.81 - k) \times k$$

$$4861.23 = (181.81 - k)k$$

$$4861.23 = 181.81 k - k^2$$

$$k = 149 \text{ veh/km and } k = 32.6 \text{ veh/km}$$

$$\approx 33 \text{ veh/km}$$

13. Ans: 35.7 kmph

Sol: $V_{sf} = 50$ kmph

$$t_j = 70 \text{ veh/km}$$

$$q_{\max} = \frac{V_{sf} \times K_j}{4} = \frac{50 \times 70}{4} = 875 \text{ veh/hr}$$



$$K = 20 \text{ veh/km}$$

$$\frac{K_j}{V_{sf}} = \frac{K_j - K}{V - 0}$$

$$\frac{70}{50} = \frac{70 - 20}{V} \Rightarrow V = 35.7 \text{ kmph}$$

14. Ans: 1268 veh/hr

Sol:

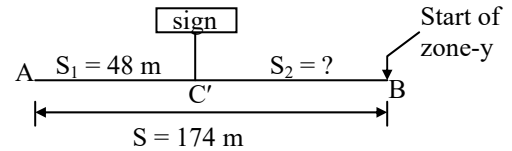

$$\frac{V_{\max}}{K_{\max}} = \frac{30 \text{ kmph}}{(130 - 30)}$$

$$K_{\max} = 130 \text{ veh/km}$$

$$V_{\max} = \frac{30}{130 - 30} \times 130 = 39 \text{ kmph}$$

$$K_{\max} = \left(\frac{V_{\max}}{2}\right)\left(\frac{K_{\max}}{2}\right)$$

$$= \frac{39}{2} \times \frac{130}{2}$$

$$\approx 1268 \text{ veh/hr}$$

15. Ans: (b)

$$\text{Sol: } Q_p = \frac{280 w \left(1 + \frac{e}{w}\right) \left(1 - \frac{p}{3}\right)}{1 + \frac{w}{L}}$$

$$w = 14 \text{ m; } e = 8.4 \text{ m}$$

$$L = 35 \text{ m}$$

$$p = \frac{\text{Crossing traffic}}{\text{Total traffic}} = \frac{1000}{2000} = 0.5$$

$$Q_p = \frac{280 \times 14 \left(1 + \frac{8.4}{14}\right) \left(1 - \frac{0.5}{3}\right)}{1 + \frac{14}{35}}$$

$$= 3733.33 \text{ PCU/hr}$$



16. Ans: 2064.10 veh/hr

Sol: $w = 6\text{ m}$; $p = 0.5$

$L = 20\text{ m}$; $e = 5.5\text{ m}$

$$= \frac{280 \times 6 \left[1 + \frac{5.5}{6} \right] \left[1 - \frac{0.5}{3} \right]}{1 + \frac{6}{20}}$$

$Q_p = 2064.10\text{ veh/hr}$

17. Ans: 0.8%

Sol: Weaving ratio = $\frac{\text{weaving traffic}}{\text{total traffic}}$

$$= \frac{V_{13} + V_{24} + V_{43}}{V_{13} + V_{23} + V_{24} + V_{14} + V_{43} + V_{21}}$$

$$= \frac{450 + 1090 + 600 + 310}{450 + 200 + 1090 + 412 + 600 + 310}$$

Weaving ratio = 0.80%

18. Ans: (b)

Sol: $y_N = \frac{1000}{2500}$ } $y_{NS} = 0.4$
 $y_S = \frac{700}{2500}$ }

$y_E = \frac{900}{3000}$ } $y_{EW} = 0.3$
 $y_W = \frac{550}{3000}$ }

$y = y_{NS} + y_{EW}$
 $= 0.4 + 0.3 = 0.7$

$L = 12\text{ sec}$

$C_o = \frac{1.5L + 5}{1 - y} = \frac{1.5 \times 12 + 5}{1 - 0.7}$

$= 76.7\text{ sec} \approx 77\text{ sec}$

19. Ans: (d)

Sol: $y = 0.5 = y_a + y_b$

$L = 10\text{ sec}$

$C_o = \frac{1.5L + 5}{1 - y} = \frac{1.5 \times 10 + 5}{1 - 0.5} = 40\text{ sec}$

20. Ans: 14.23 /veh , 1540 veh/hr

Sol: $C = S \times \frac{g}{C_o}$

$S \rightarrow$ Saturation flow

$g_i \rightarrow$ effective green time

$C_o \rightarrow$ Cycle time/Optimum signal cycle length

$\frac{g_i}{C_o} \rightarrow$ Green Ratio

$C = 2800 \times 0.55$

$= 1540\text{ veh/hr}$

$d_i = \frac{C_o \left(1 - \frac{g_i}{C_o} \right)^2}{1 - \frac{V_i}{s}}$

$= \frac{90}{2} (1 - 0.55)^2$
 $= \frac{1000}{1 - \frac{1000}{2800}} = 14.2\text{ /veh}$

21. Ans: (a)

Sol: Average delay at red signal is $= \frac{\text{red time}}{2}$


$= \frac{30}{2}$

$= 15\text{ sec}$



(or)

Alternative Solution:

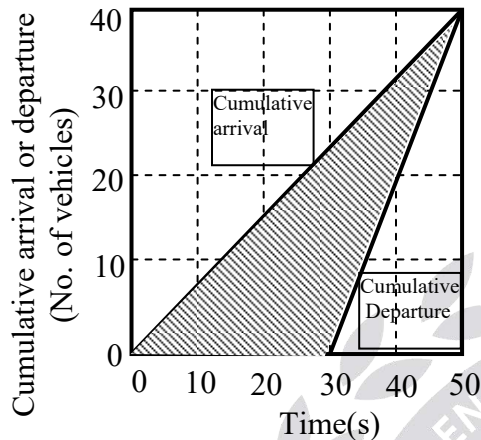

From fig:

The average delay = The area between cumulative arrival and cumulative departure / Total no of vehicles (or) The hatched area in above figure / total number of vehicles

∴ The average delay

$$= \frac{\frac{1}{2}(50)(40) - \frac{1}{2}(20)(40)}{40}$$

$$= \frac{1}{2}(50) - \frac{1}{2}(20) = 25 - 10 = 15 \text{ sec}$$

22. Ans: (a)

Sol:

Critical lane volume on major road is increased to 440 veh/hr/lane those for green time should be increased for major road and it remains same for minor road.

23. Ans: (a)

Sol: Green Time = 27 sec

Yellow Time = 4 sec

Total lost time, t_L = Start up lost time

+ Clearance lost time

$$= 2 + 1 = 3 \text{ sec}$$

Effective green time ; $g = G + y - t_L$

$$= 27 + 4 - 3 = 28 \text{ sec}$$

$$\text{Saturation flow rate; } S = \frac{3600}{h} = \frac{3600}{2.4}$$

$$= 1500 \text{ veh/hr}$$

$h \rightarrow$ Time headway

$$\text{Capacity of lane, } C = S \times \left(\frac{g_i}{C_o} \right)$$

$$= 1500 \times \left(\frac{28}{60} \right)$$

$$= 700 \text{ veh/hr/lane}$$

24. Ans: (d)

Sol: Distance travelled by bicycle = 5 km

Time of travel, $t = 40 - 15 = 25 \text{ min}$

Stop time = 15 min

$$\text{Speed of bicycle} = V_b = \frac{5}{25} \text{ km/min}$$

Let speed of stream is $V \text{ km/min}$

Assume traffic density is the constant on the road ($K = \text{Constant}$).

$$\text{but } K = \frac{q}{V}$$

During journey relative speed of stream = $V - V_b$



$$= \left(V - \frac{5}{25} \right)$$

$$K = \frac{\left(\frac{60}{25} \right) \text{Vehicles/min}}{\left(V - \frac{5}{25} \right)} \dots\dots(1)$$

During stop ($V_b = 0$)

$$K = \frac{\left(\frac{45}{15} \right) \text{Vehicles/min}}{V} = \frac{45}{15V} \dots\dots(2)$$

Equating (1) & (2)

$$K = \frac{\left(\frac{60}{25} \right)}{\left(V - \frac{5}{25} \right)} = \frac{\left(\frac{45}{15} \right)}{V} = \frac{45}{15V}$$

$$0.8 = \left(1 - \frac{5}{25V} \right)$$

$$0.2 = \frac{5}{25V}$$


$$\Rightarrow V = \frac{5}{25 \times 0.2}$$

$$\Rightarrow V = 1 \text{ km/min}$$

$$V = 60 \text{ km/hr}$$

25. Ans: 2133.33 veh/hr

Sol: $V = 80 - 0.75 K$



V_{\max} occur, when $K = 0$

$$V_{\max} = 80 \text{ kmph}$$

K_{\max} occur when $V = 0$

$$K_{\max} = \frac{80}{0.75} = 106.67 \text{ veh/km}$$

$$\text{Capacity of road, } q = \left[\frac{K_{\max} \times V_{\max}}{4} \right]$$

$$q = \frac{106.67 \times 80}{4}$$

$$q = 2133.33 \text{ veh/hr}$$

26. Ans: (c)

Sol: In R: 2,5 combination is possible 1,3 and 4,6 are not possible

27. Ans:

Sol:

Given:

Speed of the vehicle = 60 kmph

Amber duration = 4 sec

Comfortable deceleration = 3 m/sec^2

Car length = 4.0 m


Intersection width = 14

Longitudinal friction factor = 0.35

Perception reaction time = 1.5 sec

When the vehicle reaches section A, he sees the amber right. Hear, two situation are possible.

There are two possibilities

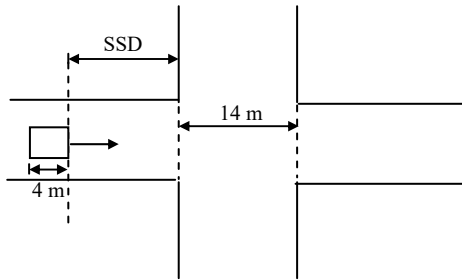

(i) Driver decides to cross intersection:

$$\begin{aligned} \text{Total distance to be covered} \\ &= \text{SSD} + 14 + 4.0 \end{aligned}$$

$$\text{SSD} = (vt) + \frac{v^2}{2gf}$$

$$\begin{aligned} &= (16.67 \times 1.5) + \frac{(16.67)^2}{2 \times 9.81 \times 0.35} \\ &= 65.47 \text{ m} \end{aligned}$$

$$\begin{aligned} \text{Total distance to be covered} \\ &= 65.47 + 14 + 4 = 83.47 \text{ m} \end{aligned}$$

$$\begin{aligned} \text{Time required} &= \frac{\text{distance}}{\text{speed of vehicle}} \\ &= \frac{83.47}{16.67} = 5.0 \text{ sec} > 4 \text{ sec} \end{aligned}$$

(ii) He decides to stop the vehicle time taken to stop the vehicle after sighting the amber light.

= Reaction time + time taken to stop the vehicle after application of brakes

$$= 1.5 + \left(\frac{60 \times \frac{5}{18} - 0}{3} \right) = 1.5 + 5.55$$

$$= 7.05 \text{ sec} > 4 \text{ sec}$$

Therefore, in both the situation, the required duration is greater than the provided amber duration hence the driver's claim is correct.

28. Ans: 0.1353

Sol: Probability that the gap is greater than 8 sec

$$P(h \geq t) = e^{-\lambda t}$$

λ = rate of arrival per second

$$= \frac{900}{3600} = 0.25$$

$$t = 8 \text{ sec}$$

$$P(h \geq 8) = e^{-0.25 \times 8}$$

$$P(h \geq 8) = 0.1353$$

29. Ans: (a)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-15, 4th Question -pg: 1025)

30. Ans: (c)

Sol: Refer previous ESE-Obj-(Vol-2) solutions
Book (Cha-15, 24th Question -pg: 1028)

Chapter- 17 Geometric Design of Railway Track

01. Ans: (b)

Sol: Grade compensations on curves:

For BG : 0.04% per degree of curve

For MG: 0.03% per degree of curve

For NG : 0.02% per degree of curve

Therefore, in the present case, for 4° curve,
the grade compensation is

$$= 0.04 \times 4 = 0.16\%$$



03. Ans: (b)

Sol: Ruling gradient in % = $\frac{1}{250} \times 100 = 0.4\%$

Grade compensation at 0.04% per degree of Curve = $0.04 \times 3 = 0.12\%$


Compensated gradient = $0.4 - 0.12$

= 0.28%

= $\frac{0.28}{100} = \frac{1}{357}$

06. Ans: (c)

Sol:



From circle property,

$\frac{l}{2} \cdot \frac{l}{2} = h(2r - h)$

$\frac{l^2}{4} = 2rh - h^2$

h^2 is neglected (being very small)

$\therefore h = \frac{l^2}{8r}$

07. Ans: (a)

Sol: Grade compensation = $2 \times 0.04\%$
= 0.08%

Stipulated ruling gradient = 0.5%

Steepest gradient = $0.5\% - 0.08\%$

= $0.42\% = \frac{1}{238}$

08. Ans: (c)

Sol:

Curve resistance = $0.04\% \times D^\circ$
= $0.04 \times 4 = 0.16\%$

Ruling gradient = $\frac{1}{150}$

= $\frac{1}{150} \times 100 = 0.67\%$

Compensated gradient

= $0.67 - 0.16$

= 0.51%

= $\frac{0.51}{100} = \frac{1}{196}$

10. Ans: 91.26 kmph

Sol: Given, $D^\circ = 2^\circ$

$R = \frac{1720}{D^\circ} = \frac{1720}{2}$

$R = 860$ mm

The "weighted average" of different trains at different speeds is calculated from the equation

Weighted average = $\frac{n_1 V_1 + n_2 V_2 + n_3 V_3 + n_4 V_4}{n_1 + n_2 + n_3 + n_4}$

$V = \frac{15 \times 50 + 10 \times 60 + 5 \times 70 + 2 \times 80}{15 + 10 + 5 + 2}$

$V = 58.125$ kmph

$e = \frac{GV^2}{127R} = \frac{1.676 \times 58.125^2}{127 \times 860}$

= 0.0518 m = 5.18 cm



Theoretical cant = Equilibrium cant + cant deficiency

$$= 5.18 + 7.60$$

$$= 12.78 \text{ cm}$$

$$e = \frac{GV^2}{127 R}$$

$$\frac{12.78}{100} = \frac{1.676 \times V^2}{127 \times 860}$$

$$V = 91.26 \text{ kmph}$$

According to railway boards Speed formula

$$V = 4.35\sqrt{R - 67}$$

$$V = 4.35\sqrt{860 - 67}$$

$$V = 122.5 \text{ kmph}$$

Hence maximum permissible speed

(i.e lower of the two value) is 91.26 kmph

11. Ans: 86.4 m

Sol: $e = 12\text{cm}$

$$V_{\max} = 85 \text{ kmph}$$

$$D = 7.6 \text{ cm (BG)}$$

Length of transition curves maximum of following:

(a) Based on arbitrary gradient of 1 in 720

$$L = 7.20 \times e$$

$$L = 7.20 \times 12 = 86.4\text{cm}$$

(b) Based on rate of change of cant deficiency

$$L = 0.073 DV_{\max}$$

$$L = 0.073 \times 7.6 \times 85$$

$$L = 47.158\text{cm}$$

(c) Based on rate of change of super elevation

$$L = 0.073e V_{\max}$$

$$L = 0.073 \times 12 \times 85$$

$$L = 74.46\text{cm}$$

\therefore Take maximum $L = 86.4\text{cm}$

Chapter- 18 Airport Runway and Taxiway design

01. Ans: (a)

Sol: Wind coverage is the time in a year of time during which cross wind component is as minimum as possible.

02. Ans: (a)

Sol: Length of runway understandard condition
= 2100 m

We have to increase 7% for every 300 m elevation above ground so length of

$$\text{runway} = 2100 + \frac{7}{100} \times 2100 = 2247 \text{ m}$$

03. Ans: (c)

Sol: Runway elevation = 1000 m (above msl)

Airport reference temperature (ART) = 16°C

Airport standard temperature (AST)

= standard temperature at msl -6.5°C for

1 km height above msl

$$\text{AST} = 15 - 6.5 = 8.5^\circ\text{C}$$

Rise in temperature as per

$$\text{ICAO} = 16 - 8.5 = 7.5^\circ\text{C}$$



04. Ans: 4 km

Sol: Runway length = 2460 m

Correction for elevation (ICAO)

300 m → 7%

486 → x

x = 11.34 %

corrected length after elevation correction

$$= \frac{11.34}{100} \times 2460 + 2460$$

$$= 2738.964 \text{ m}$$

correction for temperature

$$\text{ART} = T_1 + \frac{T_2 - T_1}{3}$$

$$= 30.2 + \frac{(46.3 - 30.2)}{3}$$

$$\text{ART} = 35.57^\circ$$

Temperature gradient 1000 – 6.5

486 – x

$$x = 3.159^\circ$$

Temperature @ airport @ 486 m elevation

$$= 15 - 3.159 = 11.841^\circ$$

1% increase in length for 1° above standard

temperature. $(3.5057^\circ - 11.841^\circ) = 23.729^\circ$

1% → 1° change

x → $(35.57^\circ - 11.84^\circ)$

$$x = 23.729\%$$

$$\text{Correction} = \frac{23.729}{100} \times 2738.964 + 2738.964$$

$$= 3388.89 \text{ m}$$

Correction for effective gradient

20% ↑ → 1% effective gradient

x → 0.75%

x = 15%

Total runway length = 1.15×3388.89

$$= 3897.22 \text{ m}$$

$$\simeq 4000 \text{ m} = 4 \text{ km}$$

05. Ans: (d)

Sol: The runway length after being corrected for elevation and temperature should further be increased at the rate of 20% for every 1 % of the effective gradient for 0.5%, 10% should be increased.

So runway length after correction of temperature and elevation

$$= 2845 + 10 \left(\frac{2845}{100} \right) = 3129.5 \simeq 3130 \text{ m}$$

06. Ans: (d)

Sol: Given $T_m = 40^\circ\text{C}$

$$T_a = 25^\circ\text{C}$$

$$\text{ART} = \frac{2T_a + T_m}{3}$$

$$= \frac{2 \times 25 + 40}{3}$$

$$= 30^\circ\text{C}$$



07. Ans: 2102.17 m

Sol: Length of runway = 1640 m

Elevation = 280 m

Reference temperature = 33.5°C

Effective gradient = 0.2%

Correction for Elevation (ICAO)

For 300 m – 7 %

280 → x

x = 6.53%

$$\begin{aligned} \text{correction} &= 1640 + \frac{6.53}{100} \times 1640 \\ &= 1747.15 \text{ m} \end{aligned}$$

Correction for temperature (ICAO)

ART = 33.5°C m

Temperature gradient

1000 m → 6.5°

280 m → x

x = 1.82°

Temp @ airport @ 280 m elevation

= 15 – 1.82

= 13.18°

1% increase in length for 1° above standard

temperature = 33.5° – 13.18°

= 20.32°

1° ↑ → 1% ↑

20.32° ↑ → x

x = 20.32%

$$\begin{aligned} \text{Correction} &= \frac{20.32}{100} \times 1747.15 + 1747.15 \\ &= 2102.17 \text{ m} \end{aligned}$$

08. Ans: 0.36 %

Sol:

Chainage	Gradient	Elevation
0	–	280 m
300	+1%	(280 + 0.01 × 300) = 283
900	–0.5%	283 – $\frac{0.5}{100} \times 600 = 280$
1500	+0.5	280 + $\frac{0.5}{100} \times 690 = 283$
1800	+1	283 + 0.01 × 300 = 286
2100	–0.5	286 – $\frac{0.5}{100} \times 300 = 284.5$
2700	0.4	284.5 – $\frac{0.4}{100} \times 600 = 282.1$
3000	–0.1	282.1 – $\frac{0.1}{100} \times 300 = 281.8$

$$\text{Effective gradient} = \left(\frac{286 - 280}{1640} \right) \times 100 = 0.36\%$$

20% → 1%

x → 0.36%

x = 7.2% ↑

Total length of runway = 1.072 × 2102.17

= 2253.5 m



09. Ans: 400 m

Sol:

(i) Horonjeff's equation:

$$R = \frac{0.388 w^2}{0.5T - S}$$
$$= \frac{0.388 \times 17.7^2}{0.5(23) - \left(6 + \frac{6.62}{2}\right)} = 55.50 \text{ m}$$

(ii) Turning radius

$$R = \frac{V^2}{125f}$$
$$= \frac{80^2}{125 \times 0.13} = 393.85 \text{ m}$$

(iii) The minimum radius of sub sonic aircraft is 135 m

∴ Turning radius = Maximum of three conditions

$$= 393.85 \text{ m}$$
$$R \approx 400 \text{ m}$$

