


GATE | PSUs



MECHANICAL ENGINEERING

Theory of Machines & Vibrations

Text Book : Theory with worked out Examples
and Practice Questions

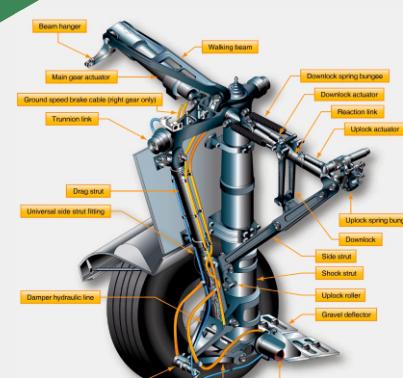

HYDERABAD | AHMEDABAD | DELHI | BHOPAL | PUNE | BHUBANESWAR | BANGALORE | LUCKNOW
PATNA | CHENNAI | VISAKHAPATNAM | VIJAYAWADA | TIRUPATHI | KOLKATA

Theory of Machines & Vibrations

Solutions for Text Book Practice Questions

Chapter
1

Analysis of Planar Mechanisms


01. Ans: (a, c)

Sol:

- The pair shown has two degree of freedom one is translational (motion along axis of bar and the rotation (rotation about axis). Both motions are independent. Therefore the pair has incomplete constraint.
- Kinematic pair is a joint of two links having relative motion between them. The pair shown form a kinematic pair.

02. Ans: (c)

Sol:




The given dimensions of the linkage satisfies Grashof's condition to get double rocker. We need to fix the link opposite to the shortest link. So by fixing link 'RS' we get double rocker.

03. Ans: (d)

Sol: At toggle position velocity ratio is 'zero' so mechanical advantage is ' ∞ '.


04. Ans: (d)

Sol: The two extreme positions of crank rocker mechanisms are shown below figure.

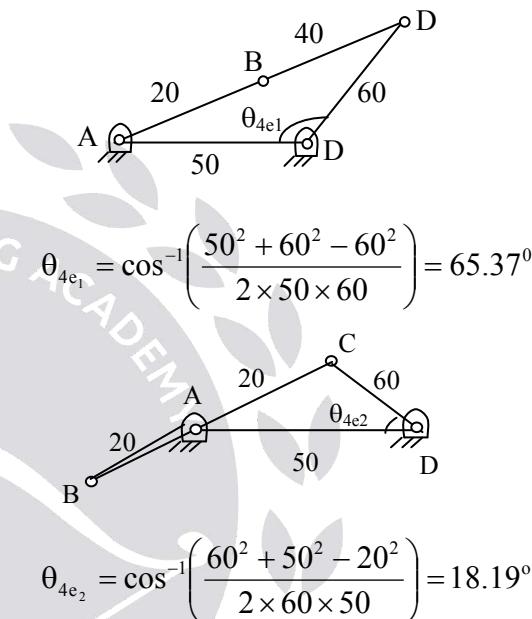

05. Ans: (a)

Sol:



Where, μ = Transmission angle

$$BD = \sqrt{20^2 + 50^2} = 53.85 \text{ cm}$$

By cosine rule

$$\cos\mu = \frac{BC^2 + CD^2 - BD^2}{2BC \times CD}$$

$$= \frac{40^2 + 60^2 - 53.85^2}{2 \times 40 \times 60} = 0.479$$

$$\mu = 61.37^\circ$$


06. Ans: (c)

Sol: Two extreme positions are as shown in figure below.

Let r = radius of crank = 20 cm

l = length of connecting rod = 40 cm

h = 10 cm

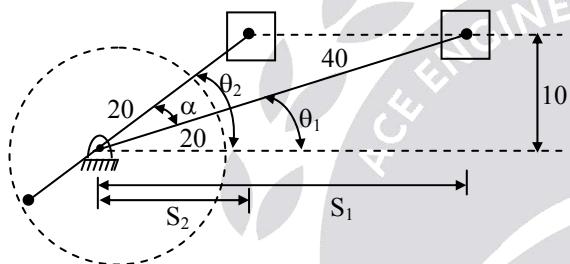

Stroke = $S_1 - S_2$

$$S_1 = \sqrt{(l+r)^2 - h^2} = \sqrt{60^2 - 10^2} = 59.16 \text{ cm}$$

$$S_2 = \sqrt{(l-r)^2 - h^2} = \sqrt{20^2 - 10^2} = 17.32 \text{ cm}$$

$$\text{Stroke} = S_1 - S_2 = 59.16 - 17.32 = 41.84 \text{ cm}$$

07. Ans: (b)

$$\text{Sol: } \theta_1 = \sin^{-1}\left(\frac{h}{l+r}\right) = \sin^{-1}\left(\frac{10}{60}\right) = 9.55^\circ$$

$$\theta_2 = \sin^{-1}\left(\frac{h}{l-r}\right) = \sin^{-1}\left(\frac{10}{20}\right) = 30^\circ$$


$$\alpha = \theta_2 - \theta_1 = 20.41^\circ$$

Quick return ratio

$$(QRR) = \frac{180 + \alpha}{180 - \alpha} = 1.2558$$

08. Ans: (c)

Sol:



$$OO_1 = 40 \text{ cm}, \quad OA = 20 \text{ cm}$$

$$\sin \alpha = \frac{OA}{OO_1} = \frac{20}{40} = \frac{1}{2}$$



$$\Rightarrow \alpha = 30^\circ$$

$$QRR = \frac{180 + 2\alpha}{180 - 2\alpha} = \frac{180 + 60}{180 - 60}$$

$$\Rightarrow QRR = 2$$

09. Ans: (c)

Sol: $\angle O_4O_2P = 180^\circ$ sketch the position diagram for the given input angle and identify the Instantaneous Centers.

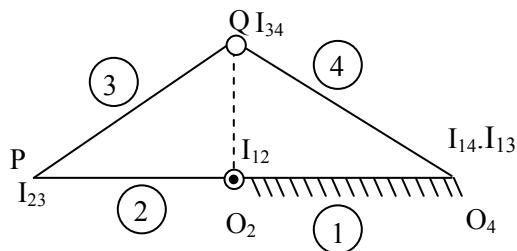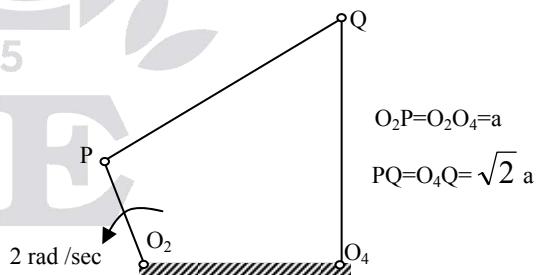

I_{13} is obtained by joining $I_{12} I_{23}$ and $I_{14} I_3$


$$\frac{\omega_3}{\omega_2} = \frac{I_{12} I_{23}}{I_{13} I_{23}} = \frac{a}{2a}$$

$$\frac{\omega_3}{2} = \frac{1}{2}$$

$$\omega_3 = 1 \text{ rad/sec}$$

Alternate Method:

The position diagram is isosceles right angle triangle and the velocity triangle is similar to the position diagram.



Velocity (Diagram)

$$V_{qp} = \omega_3 l_3 \Rightarrow \sqrt{2}a = \omega_3 \times \sqrt{2}a$$


$$\omega_3 = 1$$

$$V_q = l_4 \omega_4 \Rightarrow \sqrt{2}a = \sqrt{2}a \omega_4$$

$$\Rightarrow \omega_4 = 1 \text{ rad/sec}$$

10. Ans: (b)

Sol:

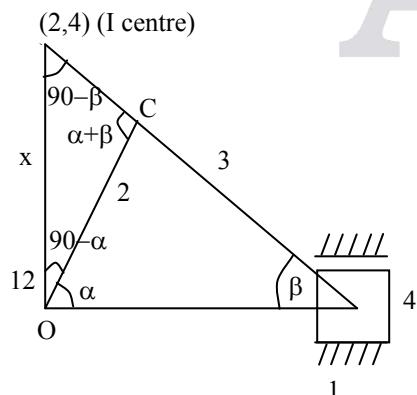

$$OC = r$$

$$\begin{aligned} \text{Velocity of slider } V_S &= (12 - 24) \times \omega_2 \\ &= x \omega_2 \end{aligned}$$


$$\frac{x}{\sin(\alpha + \beta)} = \frac{r}{\sin(90 - \beta)}$$

$$x = \frac{r \sin(\alpha + \beta)}{\sin(90 - \beta)}$$

$$\begin{aligned} V_S &= r \omega_2 \sin(\alpha + \beta) \times \sec \beta \\ &= V_C \sin(\alpha + \beta) \times \sec \beta \end{aligned}$$

11. Ans: (a)

Sol:

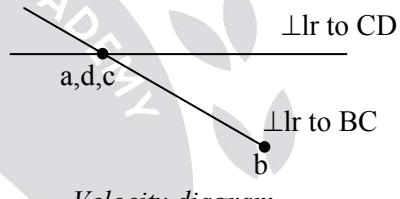

Velocity diagram

$$V_C = 0 = dc \times \omega_{CD}$$

$$\therefore \omega_{CD} = 0$$

Note: If input and coupler links are collinear, then output angular velocity will be zero.

12. Ans: (c)

Sol: In a four bar mechanism when input link and output links are parallel then coupler velocity (ω_3) is zero.

$$\Rightarrow l_2 \omega_2 = l_4 \omega_4$$

$$l_4 = 2l_2 \text{ (Given)}$$

$$\Rightarrow \omega_4 = \omega_2 / 2 = 2/2 = 1 \text{ rad/s}$$

ω_2, ω_4 = angular velocity of input and output link respectively.

Fixed links have zero velocity.

At joint 1, relative velocity between fixed link and input link = $2 - 0 = 2$

Rubbing velocity at joint 1 = Relative velocity \times radius of pin = $2 \times 10 = 20$ cm/s

$$\begin{aligned} \text{At joint 2, rubbing velocity} &= (\omega_2 + \omega_3) \times r \\ &= (2+0) \times 10 = 20 \text{ cm/s} \end{aligned}$$


+ve sign means ω_2 and ω_3 are moving in opposite directions.

$$\begin{aligned} \text{At joint 3, rubbing velocity} &= (\omega_4 + \omega_3) \times r \\ &= (1+0) \times 10 = 10 \text{ cm/s} \end{aligned}$$

$$\begin{aligned} \text{At joint 4, rubbing velocity} &= (\omega_4 - 0) \times r \\ &= (1 - 0) \times 10 = 10 \text{ cm/s} \end{aligned}$$

13. Ans: (a)

Sol:

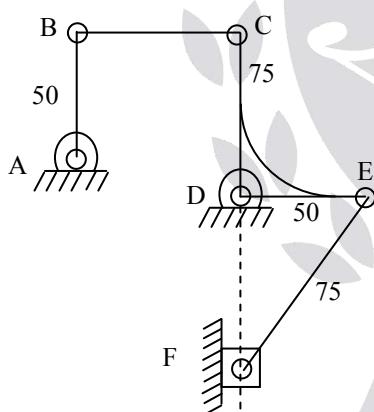

Considering the four bar mechanism

ABCD, $l_2 \parallel l_4$

$$\therefore \ell_2 \omega_2 = \ell_4 \omega_4 \Rightarrow \omega_4 = \frac{50 \times 3}{75} = 2 \text{ rad/sec}$$

CDE being a ternary link angular velocity of DE is same as that of the link DC (ω_4).

For the slider crank mechanism DEF, crank is perpendicular to the axis of the slider.

$$\begin{aligned} \therefore \text{Slider velocity} &= DE \times \omega_4 \\ &= 50 \times 2 \\ &= 100 \text{ cm/sec (upward)} \end{aligned}$$

14. Ans: (a)


Sol: Here as angular velocity of the connecting rod is zero so crank is perpendicular to the line of stroke.

$$V_s = \text{velocity of slider} = r\omega_2$$

$$2 = 1 \times \omega_2 \Rightarrow \omega_2 = 2 \text{ rad/sec}$$

15. Ans: (d)

Sol:



Here the crank is perpendicular to connecting rod

$$\text{Velocity of rubbing} = (\omega_2 + \omega_3) \times r$$

Where, r = radius of crank pin

From the velocity diagram $V_{AB} = ab = ?$

$$oa = \omega_2 \times r = 10 \times 0.3 = 3 \text{ m/sec}$$

Δoab is right angle Δ .

$$\tan \theta = \frac{oa}{ab} = \frac{40}{30} \Rightarrow \theta = 53.13^\circ$$

$$\tan \theta = \frac{r\omega_2}{\ell\omega_3}$$

$$\text{where, } n = \frac{\ell}{r}$$

$$\omega_3 = \frac{\omega_2}{n^2} = \frac{10}{\left(\frac{4}{3}\right)^2} = \frac{90}{16} = 5.625 \text{ (CW)}$$

$$\begin{aligned} V_{rb} &= (\omega_2 + \omega_3) \times r \\ &= (10 + 5.625) \times 2.5 = 39 \text{ cm/s} \end{aligned}$$

16. Ans: (d)

Sol: As for the given dimensions the mechanism is in a right angle triangle configuration and the crank AB is perpendicular to the lever CD. The velocity of B is along CD only which is purely sliding component

∴ Velocity of the slider
 $= AB \times \omega_{AB} = 10 \times 250 = 2.5 \text{ m/sec}$

17. Ans: (a)

Sol: $QRR = \frac{180 + 2\alpha}{180 - 2\alpha} = \frac{2}{1} \Rightarrow \alpha = 30^\circ$
 $\sin \alpha = \frac{OS}{OP} \Rightarrow OS = \frac{OP}{2} = 250 \text{ mm}$

18. Ans: (b)


Sol: Maximum speed during forward stroke occurs when PQ is perpendicular to the line of stroke of the tool i. e. PQ, OS & OQ are in straight line
 $\Rightarrow V = 250 \times 2 = 750 \times \omega_{PQ}$

$$\Rightarrow \omega_{PQ} = \frac{2}{3}$$

19. Ans: (d)

Sol:


$$V_Q = V_P + V_{PQ}$$


20. Ans: (a)

Sol: For rigid thin disc rolling on plane without slip. The 'I' centre lies on the point of contact.

21. Ans: (a)

Sol:

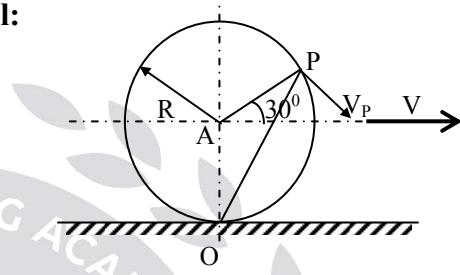

Here 'O' is the instantaneous centre

$$V_P = \omega \times OP$$

$$V_A = R\omega$$


$$\text{In } \Delta OAP, \cos 120^\circ = \frac{R^2 + R^2 - OP^2}{2R \times R}$$

$$-0.5 = \frac{2R^2 - OP^2}{2R^2}$$

$$OP = \sqrt{3}R$$

$$V_P = \sqrt{3}R \times \omega = \sqrt{3}V$$

or




$$V_P = \vec{V}_O + \vec{V}_{PO} = \vec{V} + \vec{OP} \times \omega$$

$$= \sqrt{V^2 + V^2 + 2V^2 \cos 60^\circ} = \sqrt{3}V$$

22. Ans: (d)


Sol:

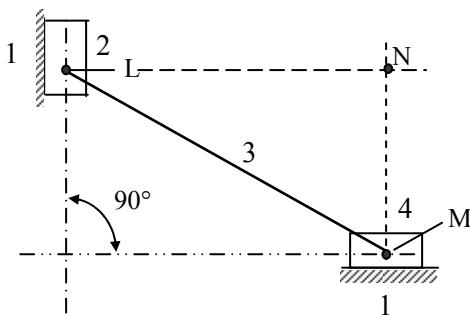

By considering the links 1, 2 and 4 as for three centers in line theorem, I_{12} , I_{14} and I_{24} lies on a straight line I_{12} is at infinity along the horizontal direction while I_{14} is at infinity along vertical direction hence I_{24} must be at infinity

23. Ans: (a)

Sol:

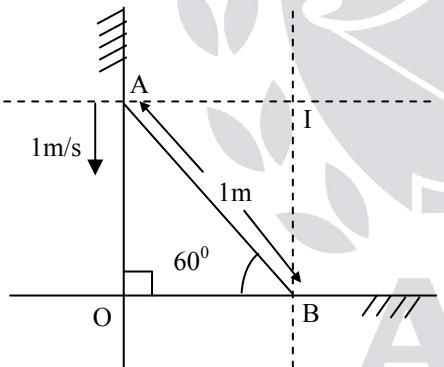

$$V_a = 1 \text{ m/s}$$

V_a = Velocity along vertical direction

V_b = Velocity along horizontal direction

So instantaneous center of link AB will be perpendicular to A and B respectively i.e at I

$$IA = OB = \cos \theta = 1 \times \cos 60^\circ = \frac{1}{2} \text{ m}$$


$$IB = OA = \sin \theta = 1 \times \sin 60^\circ = \frac{\sqrt{3}}{2} \text{ m}$$

$$V_a = \omega \times IA$$


$$\Rightarrow \omega = \frac{V_a}{IA} = \frac{1}{\frac{1}{2}} = 2 \text{ rad/sec}$$

24. Ans: (a)

Sol:

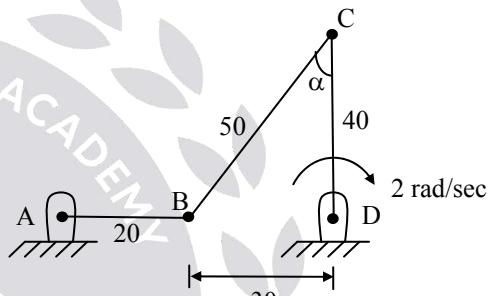

(Position Diagram)

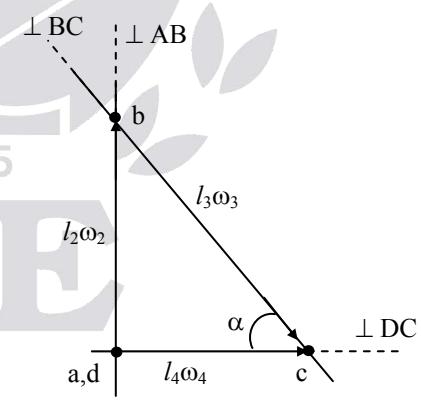

(Velocity Diagram)

Let the angle between BC & CD is α . Same will be the angle between their perpendiculars.

$$\text{From Velocity Diagram, } \frac{l_2 \omega_2}{l_4 \omega_4} = \tan \alpha$$

From Position diagram, $\tan \alpha = \frac{30}{40}$


$$\therefore \omega_2 = \omega_4 \times \frac{\ell_4}{\ell_2} \times \tan \alpha = 2 \times \frac{40}{20} \times \frac{30}{40} = 3$$

$$\omega_2 = 3 \text{ rad/sec}$$

Note: DC is the rocker (Output link) and AB is the crank (Input link).

25. Ans: (c)

Sol:

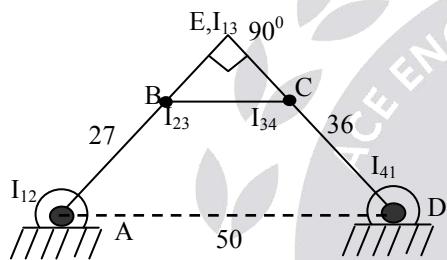

I_{13} = Instantaneous center of link 3 with respect to link 1

As AED is a right angle triangle and the sides are being integers so AE = 30 cm and DE = 40 cm

BE = 3 cm and CE = 4 cm

By 'I' center velocity method,

$$V_{23} = \omega_2 \times (AB) = \omega_3 \times (BE)$$

$$\omega_3 = \frac{1 \times 27}{3} = 9 \text{ rad/s}$$


26. Ans: (a)

Sol: Similarly, $V_{34} = \omega_3 \times (EC) = \omega_4 \times (CD)$

$$\omega_4 = \frac{9 \times 4}{36} = 1 \text{ rad/s}$$

27. Ans: (d)

Sol: Refer the figure shown below, By knowing the velocity directions instantaneous centre can be located as shown. By knowing velocity (magnitude) of Q we can get the angular velocity of the link, from this we can get the velocity of 'P' using sine rule.

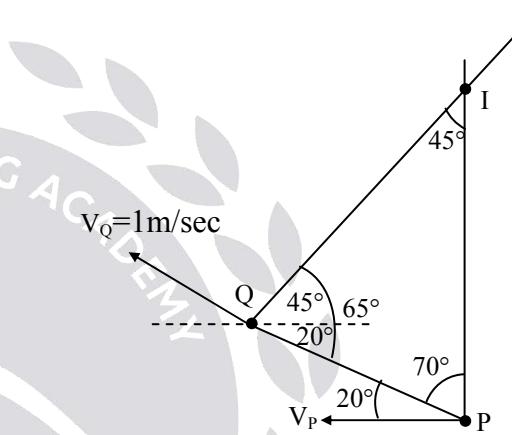

'I' is the instantaneous centre.

From sine rule

$$\frac{PQ}{\sin 45^\circ} = \frac{IQ}{\sin 70^\circ} = \frac{IP}{\sin 65^\circ}$$

$$\frac{IP}{IQ} = \frac{\sin 65^\circ}{\sin 70^\circ}$$


$$V_Q = IQ \times \omega = 1$$

$$\Rightarrow \omega = \frac{V_Q}{IQ}$$

$$V_P = IP \times \omega = \frac{IP}{IQ} \times V_Q = \frac{\sin 65^\circ}{\sin 70^\circ} \times 1 \\ = 0.9645$$

28. Ans: (c)

Sol: Consider the three bodies the bigger spool (Radius 20), smaller spool (Radius 10) and the frame. They together have three I centers, I centre of big spool with respect to the frame is at its centre A. that of the small spool with respect to the frame is at its centre H. The I centre for the two spools P is to be located.

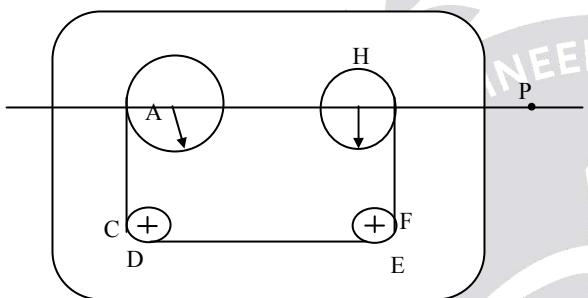

As for the three centers in line theorem all the three centers should lie on a straight line implies on the line joining of A and H. More over as both the spools are rotating in the same direction, P should lie on the same side of A and H. Also it should be close to the spool running at higher angular velocity. Implies close to H and it is to be on the right of H. Whether P belongs to bigger spool or smaller spool its velocity must be same. As for the radii of the spools and noting that the velocity of the tape is same on both the spools

$$\omega_H = 2\omega_A$$

$$\therefore AP \cdot \omega_A = HP \cdot \omega_H \text{ and}$$


$$AP = AH + HP \Rightarrow HP = AH$$

Note:

- (i) If two links are rotating in same directions then their Instantaneous centre will never lie in between them. The 'I' center will always close to that link which is having high velocity.
- (ii) If two links are rotating in different directions, their 'I' center will lie in between the line joining the centres of the links.

29. Ans: (b)

Sol: I_{23} should be in the line joining I_{12} and I_{13} . Similarly the link 3 is rolling on link 2.

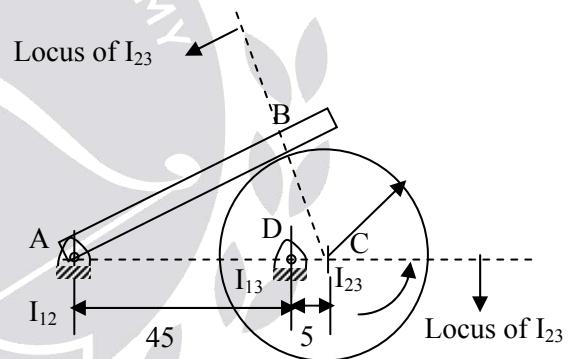

So the I – Center I_{23} will be on the line perpendicular to the link – 2. (I_{23} lies common normal passing through the contact point)

So the point C is the intersection of these two loci which is the center of the disc.

$$\text{So } \omega_2(I_{12}, I_{23}) = \omega_3(I_{13}, I_{23})$$


$$\Rightarrow \omega_2 \times 50 = 1 \times 5$$

$$\Rightarrow \omega_2 = 0.1 \text{ rad/sec}$$

30. Ans: 1 (range 0.95 to 1.05)

Sol: Locate the I-centre for the link AB as shown in fig. M is the mid point of AB

Given, $V_A = 2 \text{ m/sec}$

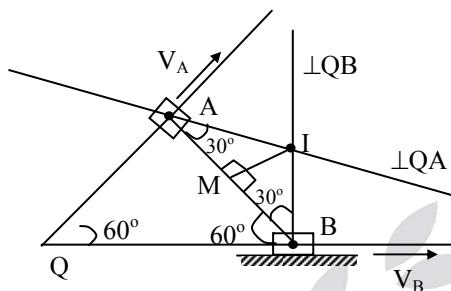


$$V_A = IA \cdot \omega \Rightarrow \omega = \frac{V_A}{IA}$$

$$V_M = IM \cdot \omega = IM \frac{V_A}{IA} = \frac{IM}{IA} \cdot V_A$$

$$= \sin 30^\circ \cdot V_A = \frac{1}{2} \cdot 2 = 1 \text{ m/sec}$$

31. Ans: (a) & 32. Ans: (b)

Sol:



Centripetal acceleration,

$$f^c = r\omega^2 = 0.4 \text{ m/s}^2 \text{ acts towards the centre}$$

Tangential acceleration, $f^t = r\alpha = 0.2 \text{ m/s}^2$ acts perpendicular to the link in the direction of angular acceleration. Linear deceleration = 0.5 m/s^2 acts opposite to velocity of slider

As the link is rotating and sliding so coriolis component of acceleration acts

$$f^{co} = 2V\omega = 2 \times 0.2 \times 1 = 0.4 \text{ m/s}^2$$

To get the direction of coriolis acceleration, rotate the velocity vector by 90° in the direction of ω .

Resultant acceleration

$$= \sqrt{0.6^2 + 0.1^2} = 0.608 \text{ m/sec}^2$$


$$\phi = \tan^{-1} \left(\frac{0.6}{0.1} \right) = 80.5$$

Angle of Resultant vector with reference to

$$OX = 30 + \phi = 30 + 80.5 = 110.53^\circ$$

33. Ans: (d)

Sol:

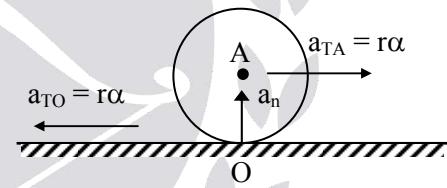


Acceleration at point 'O'

$$\vec{a}_o = \vec{a}_{TO} + \vec{a}_{TA} + \vec{a}_n$$

\vec{a}_{TO} and \vec{a}_{TA} are linear accelerations

with same magnitude and opposite in direction.

$$\Rightarrow \vec{a}_o = \vec{a}_n = \frac{V^2}{r} = r\omega^2$$




(Acceleration diagram)

$$\text{Resultant acceleration, } f^R = r\omega^2$$

34. Ans: (c)

Sol:



$$V_B = OB \times \omega$$

$$V_A = OA \times \omega$$

$$V_{BA} = V_B - V_A = (OB - OA) \times \omega \\ = \omega (r_B - r_A)$$

and direction of motion point 'B'.

35. Ans: (d)

Sol: As uniform angular velocity is given,


Tangential acceleration, $\alpha = 0$

Centripetal acceleration,

$$f_{BA} = (r_B^2 - r_A^2) \times \omega \text{ from Z to 'O'}$$

36. Ans: (a)

Sol:

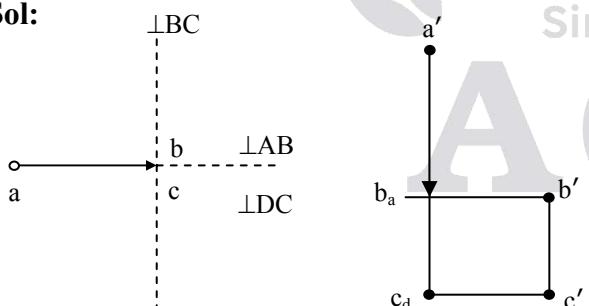

Velocity Diagram

Acceleration Diagram

From velocity Diagram, $V_C = V_B$

$$l_4\omega_4 = l_2\omega_2$$

$$25 \times \omega_4 = 50 \times 0.2$$

$$\Rightarrow \omega_4 = 0.4 \text{ rad/sec}$$

From Acceleration Diagram,


$$l_4\alpha_4 = l_2\alpha_2$$

$$25 \times \alpha_4 = 50 \times 0.1$$

$$\Rightarrow \alpha_4 = 0.2 \text{ rad/sec}^2$$

37. Ans: (d)

Sol:

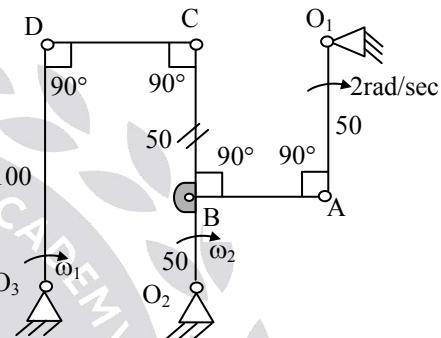

As links O₁A and O₂B are parallel then

$$V_A = V_B$$

$$\Rightarrow 50 \times 2 = 50 \times \omega_2$$

$$\Rightarrow \omega_2 = 2 \text{ rad/sec}$$

As links O₂C and O₃D are parallel then

$$V_C = V_D$$

$$\Rightarrow 100 \times 2 = 100 \times \omega_1$$

$$\Rightarrow \omega_1 = 2 \text{ rad/sec}$$

$$V_D = r\omega_1$$



$$= 100 \times 2 = 200 \text{ mm/sec}$$

$$\alpha = 0 \text{ (given), so tangential acceleration } a^t \\ = r\alpha = 0$$

$$\text{Centripetal acceleration, } f^c = r\omega_1^2 \\ = 100 \times (2)^2 = 400 \text{ mm/sec}^2$$

38.

Sol:

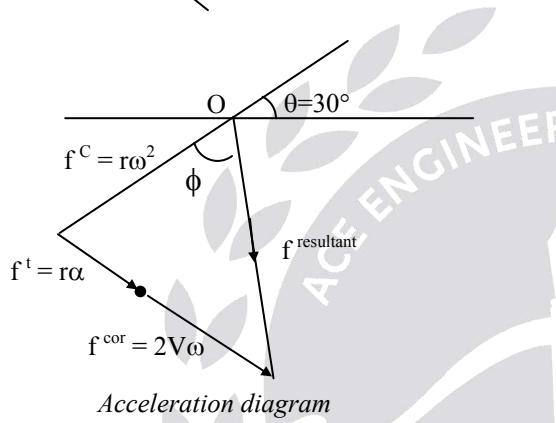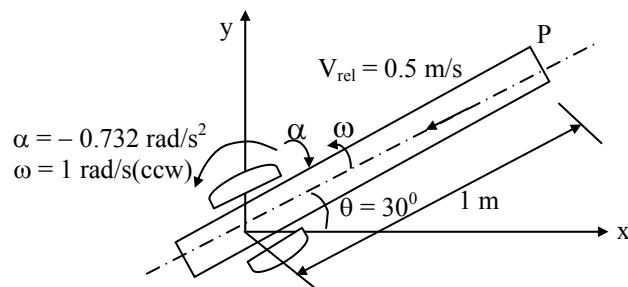Radial relative acceleration, $f^{\text{linear}} = 0$ Centripetal acceleration, $f^c = r\omega^2$
 $= 1 \times 1^2 = 1 \text{ m/s}^2$ (acts towards the center)Tangential acceleration, $f^t = r\alpha$
 $= 1 \times 0.732 = 0.732 \text{ m/sec}^2$ Coriolis acceleration, $f^{\text{cor}} = 2V\omega$
 $= 2 \times 0.5 \times 1 = 1 \text{ m/sec}^2$

Resultant acceleration,

$$f^r = \sqrt{1^2 + (1 + 0.732)^2} = 2 \text{ m/sec}^2$$

$$\phi = \tan^{-1}\left(\frac{1.732}{1}\right) = 60^\circ$$

$$\theta_{\text{reference}} = 30 + 180 + 60 = 270^\circ$$

39. Ans: (d)


Sol: Angular acceleration of connecting rod is given by

$$a = -\omega^2 \sin \theta \left[\frac{(n^2 - 1)}{(n^2 - \sin^2 \theta)^{3/2}} \right]$$

when $n = 1$, $a = 0$

40. Ans: (b) & 41. Ans: (a)

Sol:

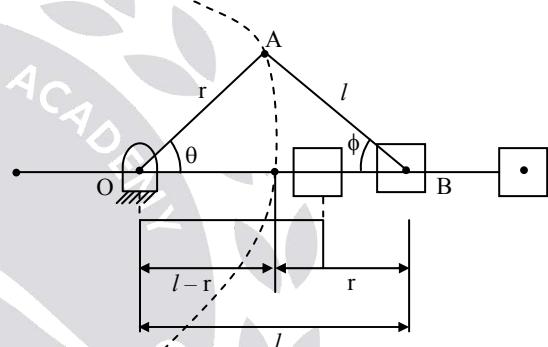

$$F_p = 2 \text{ kN}$$

$$l = 80 \text{ cm} = 0.8 \text{ m}$$

$$r = 20 \text{ cm} = 0.2 \text{ m}$$

From the triangle OAB

$$\cos \phi = \frac{\ell^2 + \ell^2 - r^2}{2\ell^2}$$

$$= \frac{2 \times 80^2 - 20^2}{2 \times 80^2} \Rightarrow \phi = 14.36$$

$$\cos \theta = \frac{20^2 + 80^2 - 80^2}{2 \times 20 \times 80} \Rightarrow \theta = 82.82$$

Thrust connecting rod

$$F_T = \frac{F_p}{\cos \phi} = \frac{2}{\cos 14.36} = 2.065 \text{ kN}$$

Turning moment,

$$\begin{aligned} T &= F_T \times r = \frac{F_p}{\cos \phi} (\sin(\theta + \phi)) \times r \\ &= \frac{2}{\cos 14.36} \times \sin(14.36 + 82.82) \times 0.2 \\ &= 0.409 \text{ kN-m} \end{aligned}$$

42. Ans: (b)

Sol: Calculate AB that will be equal to 260 mm

$$L = 260 \text{ mm}, \quad P = 160 \text{ mm}$$

$$S = 60 \text{ mm}, \quad Q = 240 \text{ mm}$$

$$L + S = 320$$

$$P + Q = 400$$

$$\therefore L+S < P+Q$$

It is a Grashof's chain

Link adjacent to the shortest link is fixed

\therefore Crank – Rocker Mechanism.

43. Ans: (b)

Sol: $O_2A \parallel O_4B$

Then linear velocity is same at A and B.


$$\therefore \omega_2 \times O_2A = \omega_4 \times O_4B$$

$$\therefore 8 \times 60 = \omega_4 \times 160$$

$$\Rightarrow \omega_4 = 3 \text{ rad/sec}$$

44. Ans: (c)

Sol:

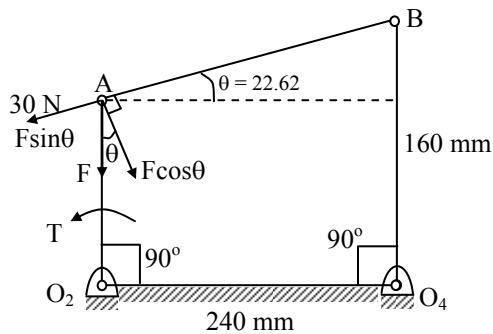

$$\tan \theta = \frac{100}{240} \Rightarrow \theta = 22.62^\circ$$

As centre of mass falls at O_2

$$m\bar{r}\omega^2 = 0 \quad (\because \bar{r} = 0)$$

$$\alpha = 0 \quad (\text{Given})$$

Inertia torque = 0

Since torque on link O_2A is zero, the resultant force at point A must be along O_2A .

$$\Rightarrow F \sin 22.62 = 30$$

$$\Rightarrow F = \frac{30}{\sin 22.62} = 78 \text{ N}$$

The magnitude of the joint reaction at $O_2 = F = 78 \text{ N}$

45. Ans: (d)

$$\text{Sol: } I \frac{d^2\theta}{dt^2} = T + f(\sin \theta, \cos \theta)$$


Where 'T' is applied torque, f is inertia torque which is function of $\sin \theta$ & $\cos \theta$

$$\frac{d\theta}{dt} = \frac{T}{I} t + f'(\sin \theta, \cos \theta) + c_1$$

$$\theta = \frac{T}{I} t^2 + c_1 t + f''(\sin \theta, \cos \theta)$$


θ is fluctuating on parabola

and @ $t = 0$, $\theta = 0$, $\dot{\theta}$ (slope) = 0 (because it starts from rest)



46. Ans: 1 (range 0.9 to 1.1)

Sol:

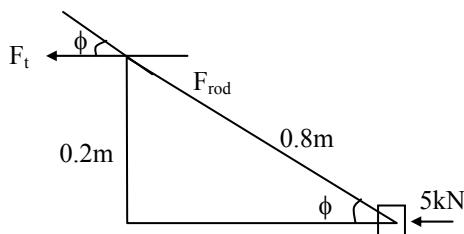

Given $F_p = 5\text{kN}$


$$F_{\text{rod}} = \frac{F_p}{\cos \phi}, F_t = F_{\text{rod}} \cos \phi$$

$$\therefore F_t = 5 \text{ kN}$$

Turning moment = $F_t \cdot r = 5 \times 0.2 = 1 \text{ kN-m}$

47. Ans: (a)

Sol:

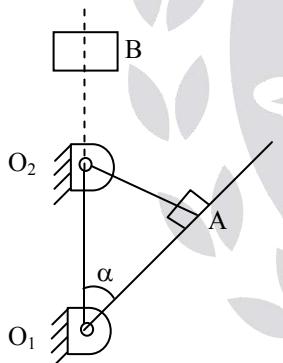

$N = 120 \text{ rpm}$,

$$\omega_2 = \frac{2\pi N}{60} = 4\pi \text{ rad/s}$$

$$\therefore l_1 = O_1 O_2 = 50 \text{ cm}$$

$$\text{QRR} = 1:2 = \frac{1}{2}$$

$$\frac{1}{2} = \frac{180 - 2\alpha}{180 + 2\alpha} \Rightarrow 180 + 2\alpha = 360 - 4\alpha$$

$$\Rightarrow 6\alpha = 180^\circ$$

$$\Rightarrow \alpha = 30^\circ$$

$$\sin 30 = \frac{O_2 A}{O_1 O_2}$$

$$\Rightarrow \frac{1}{2} = \frac{O_2 A}{50} \Rightarrow O_2 A = 25 \text{ cm}$$

$$\therefore l_2 = 25 \text{ cm}$$

At the position given above ($O_1 O_2 B$) the tool post attains the maximum velocity.

At that given instant

$$l_2 \omega_2 = l_4 \omega_4 \text{ & velocity of slider is zero.}$$

$$l_4 = O_1 B = l_1 + l_2 = 50 + 25 = 75 \text{ cm}$$

$$\Rightarrow 25 \times 4\pi = 75 \times \omega_4$$

$$\omega_4 = \frac{100\pi}{75} = \frac{4\pi}{3} = 4.19 \text{ rad/s}$$

ω_4 = angular velocity of slotted lever.


01. Ans (a)

Sol: Profile between base and root circles is not involute. If tip of a tooth of a mating gear digs into this non-involute portion interference will occur.

02. Ans: (d)

Sol: Angle made by 32 teeth + 32 tooth space

$$= 360^\circ.$$

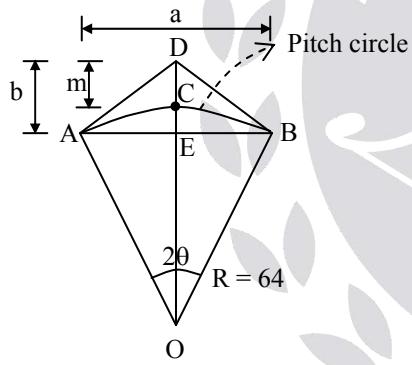

$$2\theta = \frac{360}{64} = 5.625$$

$$\theta = 2.8125$$

$$R = \frac{mT}{2} = \frac{4 \times 32}{2} = 64 \text{ mm}$$

$$a = R \sin \theta \times 2$$

$$= 64 \times \sin(2.81) \times 2 = 6.28$$

$$OE = R \cos \theta = 64 \times \cos(2.8125) = 63.9 \text{ mm}$$

$$b = \text{addendum} + CE = \text{module} + (OC - OE)$$

$$= 4 + (64 - 63.9) = 4.1$$

03. Ans: (a)

Sol: When addendum of both gear and pinion are same then interference occurs between tip of the gear tooth and pinion.

04. Ans: Decreases, Increases**05. Ans: (b)**


Sol: For same addendum interference is most likely to occur between tip of the gear tooth and pinion i.e., at the beginning of the contact.

06. Ans: (b)

Sol: For two gears are to be meshed, they should have same module and same pressure angle.

07. Ans: (b)

Sol:

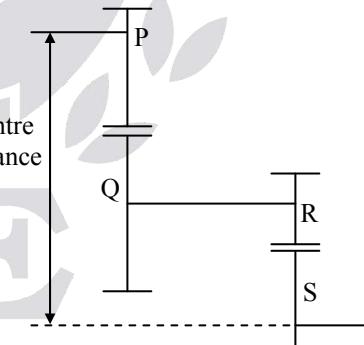

$$\text{Given } T_p = 20, T_q = 40, T_r = 15, T_s = 20$$

$$\text{Dia of } Q = 2 \times \text{Dia of } R$$

$$m_Q \cdot T_Q = 2m_R \cdot T_R$$

$$\text{Given, module of } R = m_R = 2 \text{ mm}$$

$$\Rightarrow m_Q = 2 m_R \frac{T_R}{T_Q} = 2 \times 2 \times \frac{15}{40} = 1.5 \text{ mm}$$

$$m_P = m_Q = 2\text{mm}$$

$$m_S = m_R = 1.5 \text{ mm}$$

$$\text{Radius} = \text{module} \times \frac{\text{No. of teeth}}{2}$$

Centre distance between P and S is given by

$$R_P + R_Q + R_R + R_T$$

$$\begin{aligned} &= m_P \frac{T_P}{2} + m_Q \frac{T_Q}{2} + m_R \frac{T_R}{2} + m_S \frac{T_S}{2} \\ &= 1.5 \left[\frac{40+20}{2} \right] + 2 \left[\frac{15+20}{2} \right] \\ &= 45 + 35 = 80 \text{ mm} \end{aligned}$$


08. Ans: (c)

$$\text{Sol: } \frac{N_2}{N_6} = \frac{N_3 N_5 N_6}{N_2 N_4 N_5} = \frac{N_3 N_6}{N_2 N_4}$$

Wheel 5 is the only Idler gear as the number of teeth on wheel '5' does not appear in the velocity ratio.

09. Ans: (a)

Sol:



$$Z_1 = 16, Z_3 = 15, Z_2 = ?, Z_4 = ?$$

First stage gear ratio, $G_1 = 4$,

Second stage gear ratio, $G_2 = 3$,

$$m_{12} = 3, m_{34} = 4$$

$$Z_2 = 16 \times 4 = 64$$

$$Z_4 = 15 \times 3 = 45$$

10. Ans: (b)


Sol: Centre distance

$$= \frac{m_{12}}{2} \times (Z_1 + Z_2) = \frac{m_{34}}{2} \times (Z_3 + Z_4)$$

$$= \frac{4}{2} \times (15 + 45) = 120 \text{ mm}$$

11. Ans: 5 rpm (CCW)

Sol:



$$T_1 = 104, N_1 = 0,$$

$$T_2 = 96, N_a = 60 \text{ rpm (CW+ve)}, N_2 = ?$$

$$\frac{N_2 - N_a}{N_1 - N_a} = \frac{T_1}{T_2} = \frac{104}{96}$$

$$\frac{N_2 - 60}{0 - 60} = \frac{104}{96}$$

$$N_2 = 60 \left[1 - \frac{104}{96} \right] = \frac{-60 \times 8}{96} = -5 \text{ rpm CW}$$

$$= 5 \text{ rpm in CCW}$$

12. Ans: (a)

Sol: By Analytical Approach

$$\frac{\omega_1 - \omega_5}{\omega_4 - \omega_5} = \frac{-T_2}{T_1} \times \frac{-T_4}{T_3} = \frac{45}{15} \times \frac{40}{20}$$

$$\frac{\omega_1 - \omega_5}{\omega_4 - \omega_5} = 6$$

13. Ans: (d)

Sol: Data given:

$$\omega_1 = 60 \text{ rpm (CW, +ve)}$$

$$\omega_4 = -120 \text{ rpm [2 times speed of gear -1]}$$

$$\text{We have, } \frac{\omega_1 - \omega_5}{\omega_4 - \omega_5} = 6$$

$$\Rightarrow \frac{60 - \omega_5}{-120 - \omega_5} = 6, \text{ simplifying}$$

$$60 - \omega_5 = -720 - 6\omega_5$$

$$\omega_5 = -156 \text{ rpm CW}$$

$$\Rightarrow \omega_5 = 156 \text{ rpm CCW}$$

14. Ans: (c)

Sol: $\omega_2 = 100 \text{ rad/sec (CW+ve)},$

$$\omega_{\text{arm}} = 80 \text{ rad/s (CCW)} = -80 \text{ rad/sec}$$

$$\frac{\omega_5 - \omega_a}{\omega_2 - \omega_a} = \frac{-T_2}{T_3} \times \frac{T_4}{T_5}$$

$$\frac{\omega_5 - (-80)}{100 - (-80)} = \frac{-20}{24} \times \frac{32}{80} = -\frac{1}{3}$$

$$\Rightarrow \omega_5 = -140 \text{ CW} = 140 \text{ CCW}$$

15. Ans (c)

Sol: It also rotates one revolution but in opposite direction because of differential gear system

16. Ans: (c)

Sol: No .of Links, L = 4

No. of class 1 pairs $J_1=3$

No. of class 2 pairs $J_2=1$ (Between gears)

$$\text{No. of dof} = 3(L - 1) - 2J_1 - J_2 = 2$$

17. Ans: (a)

Sol: r_b = base circle radius,

r_d = dedendum radius

r = pitch circle radius.

For the complete profile to be involute,

$$r_b = r_d$$

$$r_d = r - 1 \text{ module}$$

$$r = \frac{mT}{2} = \frac{16 \times 5}{2} = 40 \text{ mm}$$

$$\therefore r_b = r_d = 40 - 1 \times 5 = 35 \text{ mm}$$

$$r_b = r \cos\phi \Rightarrow \phi \approx 29^\circ$$

18. Ans: -3.33 N-m

$$\frac{\omega_s - \omega_a}{\omega_p - \omega_a} = \frac{-Z_p}{Z_s}$$

$$\Rightarrow \frac{0 - 10}{\omega_p - 10} = \frac{-20}{40}$$

$$\Rightarrow \omega_p = 30 \text{ rad/sec}$$

By assuming no losses in power transmission

$$T_p \times \omega_p + T_s \times \omega_s + T_a \times \omega_a = 0$$

$$\Rightarrow T_p \times 30 + T_s \times 0 + 5 \times 10 = 0$$

$$\Rightarrow T_p = \frac{-50}{30} = -1.67 \text{ N-m}, T_p + T_s + T_a = 0$$

$$\Rightarrow -1.67 + T_s + 5 = 0$$

$$\Rightarrow T_s = -3.33 \text{ N-m}$$

19. Ans: (a)

Sol: Train value = speed ratio

20. Ans: (d)

Sol: $T_s + 2 T_p = T_A \quad \dots(1)$

$$\frac{N_A - N_a}{N_p - N_a} = \frac{T_p}{T_A} \quad \dots(2)$$

and $\frac{N_p - N_s}{N_s - N_g} = -\frac{T_s}{T_p} \quad \dots(3)$

From (2) and (3)

$$\frac{N_A - N_a}{N_s - N_a} = -\frac{T_B}{T_A}$$

$$\Rightarrow \frac{300 - 180}{0 - 180} = -\frac{80}{T_A}$$

$$\therefore T_A = 120$$

$$80 + 2 T_p = 120$$

$$\Rightarrow T_p = 20$$

Chapter
3

Flywheels

01.

Sol: Given

$$P = 80 \text{ kW} = 80 \times 10^3 \text{ W} = 80,000 \text{ W}$$

$$\Delta E = 0.9 \text{ Per cycle}$$

$$N = 300 \text{ rpm}$$

$$C_s = 0.02$$

$$\omega = \frac{2\pi N}{60} = \frac{2\pi \times 30}{60} = 31.41 \text{ rad/s}$$

$$\rho = 7500 \text{ kg/m}^3$$

$$\sigma_c = 6 \text{ MN/m}^2$$

$$\sigma_c = \rho V^2 = \rho R^2 \omega^2$$

$$R = \sqrt{\frac{\sigma_c}{\rho \omega^2}} = \sqrt{\frac{6 \times 10^6}{7500 \times 31.41^2}}$$

$$R = 0.9 \text{ m}$$

$$D = 2R = 1.8 \text{ m}$$

$$N = 300 \text{ rpm} = 5 \text{ rps} \rightarrow 0.2 \text{ Sec/rev}$$

$$1 \text{ cycle} = 2 \text{ revolution } (\because \text{4 stroke engine})$$

$$= 0.4 \text{ sec}$$

$$\text{Energy developed per cycle}$$

$$= 0.4 \times 80 = 32 \text{ kJ}$$

$$\Delta E = E \text{ per cycle} \times 0.9$$


$$= 32 \times 10^3 \times 0.9 = 28800 \text{ J}$$

$$\Delta E = I \omega^2 C_s$$

$$I = \frac{\Delta E}{\omega^2 C_s}$$

$$I = 1459.58 \text{ kg-m}^2$$

02.

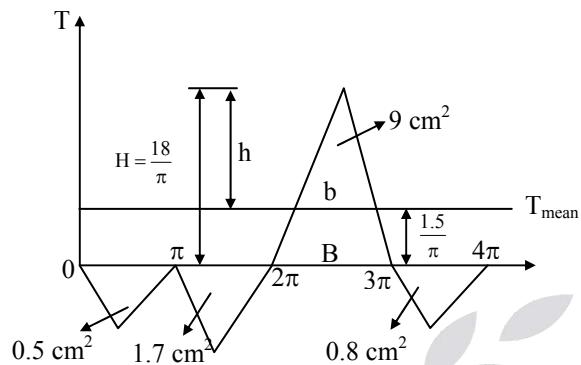Sol:

$$\text{Given: } 1 \text{ cm}^2 = 1400 \text{ J}$$

Assume on x-axis 1 cm = 1 radian and on y-axis 1 cm = 1400 N-m

$$a_1 = -0.5 \text{ cm}^2$$


$$a_2 = -1.7 \text{ cm}^2$$

$$a_3 = 9 \text{ cm}^2$$

$$a_4 = -0.8 \text{ cm}^2$$

$$\begin{aligned}\text{Work done per cycle} &= -a_1 - a_2 + a_3 - a_4 \\ &= -0.5 - 1.7 + 9 - 0.8 \\ &= 6 \text{ cm}^2\end{aligned}$$

$$\begin{aligned}\text{Mean torque } T_m &= \frac{\text{Workdone per cycle}}{4\pi} \\ &= \frac{6}{4\pi} = \frac{1.5}{\pi} \text{ cm}\end{aligned}$$

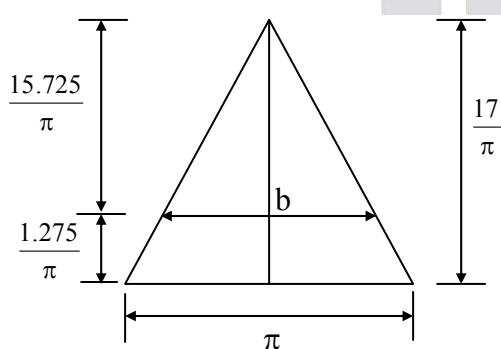

Area of the triangle (expansion)

$$= \frac{1}{2} \times \pi \times H = 9$$

$$H = 18 / \pi$$

Area above the mean torque line

$$\Delta E = \frac{1}{2} \times b \times h$$

From the similar triangles ,

$$\frac{b}{B} = \frac{h}{H} \Rightarrow b = \frac{16.5}{18} \times \pi$$

$$\begin{aligned}\Delta E &= \frac{1}{2} \times b \times \frac{16.5}{\pi} \\ &= \frac{1}{2} \times \frac{16.5}{18} \times \frac{16.5}{\pi} = 7.56 \text{ cm}^2\end{aligned}$$

$$\Delta E = 7.56 \times 1400 = 10587 \text{ N-m}$$

$$N_1 = 102 \text{ rpm}, \quad N_2 = 98 \text{ rpm},$$

$$\omega_1 = \frac{2\pi N_1}{60} = 10.68 \text{ rad/s}$$


$$\omega_2 = \frac{2\pi N_2}{60} = 10.26 \text{ rad/s}$$

$$\Delta E = \frac{1}{2} \times I \times (\omega_1^2 - \omega_2^2)$$

$$I = \frac{2 \times \Delta E}{(\omega_1^2 - \omega_2^2)} = \frac{2 \times 10587}{10.68^2 - 10.26^2}$$

$$I = 2405.6 \text{ kg-m}^2$$

03.

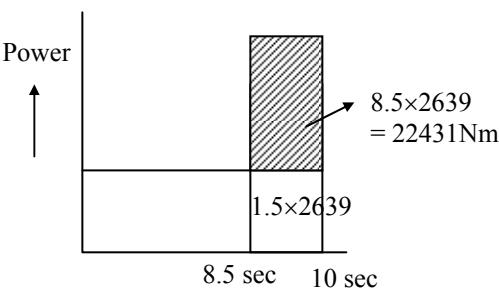Sol:

Given:

$$\begin{aligned}
d &= 40 \text{ mm}, & t &= 30 \text{ mm} \\
E_1 &= 7 \text{ N-m/mm}^2, & S &= 100 \text{ mm} \\
V &= 25 \text{ m/s}, V_1 - V_2 = 3\%V, & C_S &= 0.03 \\
A &= \pi dt = \pi \times 40 \times 30 \\
&= 3769.9 = 3770 \text{ mm}^2
\end{aligned}$$

Since the energy required to punch the hole is 7 Nm/mm^2 of sheared area, therefore the Total energy required for punching one hole $= 7 \times \pi dt = 26390 \text{ N-m}$

Also the time required to punch a hole is 10 sec, therefore power of the motor required $= \frac{26390}{10} = 2639 \text{ Watt}$

The stroke of the punch is 100 mm and it punches one hole in every 10 seconds.

Total punch travel = 200 mm
(up stroke + down stroke)

Velocity of punch $= (200/10) = 20 \text{ mm/s}$

Actual punching time $= 30/20 = 1.5 \text{ sec}$

Energy supplied by the motor in 1.5 sec is $E_2 = 2639 \times 1.5 = 3958.5 = 3959 \text{ N-m}$

Energy to be supplied by the flywheel during punching or the maximum fluctuation of energy

$$\begin{aligned}
\Delta E &= E_1 - E_2 \\
&= 26390 - 3959 = 22431 \text{ N-m}
\end{aligned}$$

Coefficient of fluctuation of speed

$$C_S = \frac{V_1 - V_2}{V} = 0.03$$

We know that maximum fluctuation of energy (ΔE)

$$\begin{aligned}
22431 &= m V^2 C_S = m (25)^2 (0.03) \\
m &= 1196 \text{ kg}
\end{aligned}$$

04. Ans: 4.27

Sol: $I = mk^2 = 200 \times 0.4^2 = 32 \text{ kg-m}^2$

$$\omega_1 = \frac{2\pi \times 400}{60} = 41.86 \text{ rad/s}$$

$$\omega_2 = \frac{2\pi \times 280}{60} = 26.16 \text{ rad/s}$$

$$\text{Energy released} = \frac{1}{2} I (\omega_1^2 - \omega_2^2) = 17086.6 \text{ J}$$

$$\text{Total machining time} = \frac{60}{5} = 12 \text{ sec}$$

$$\text{Power of motor} = \frac{17086.6}{12 - 8} = 4.27 \text{ kW}$$

05. Ans: (d)

Sol: Work done $= -0.5 + 1 - 2 + 25 - 0.8 + 0.5$
 $= 23.2 \text{ cm}^2$

Work done per cycle $= 23.2 \times 100 = 2320$

$$(\because 1 \text{ cm}^2 = 100 \text{ N-m})$$

$$T_{\text{mean}} = \frac{\text{W.D per cycle}}{4\pi}$$

$$= \frac{2320}{4\pi} = \frac{580}{\pi} \text{ N-m}$$

Suction = 0 to π ,


Compression = π to 2π

Expansion = 2π to 3π ,

Exhaust = 3π to 4π

06. Ans: (c)

Sol:

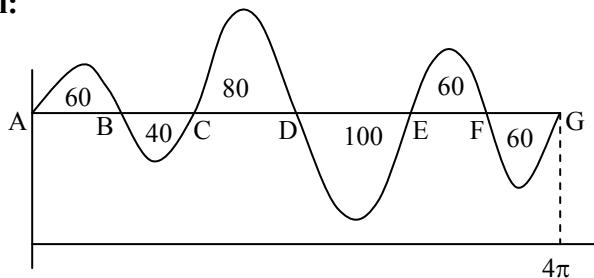

$$E_A = E$$

$$E_B = E + 60$$

$$E_C = E + 60 - 40 = E + 20$$

$$E_D = E + 20 + 80 = E + 100 = E_{\max}$$

$$E_E = E + 100 - 100 = E$$

$$E_F = E + 60$$

$$E_G = E + 60 - 60 = E_{\min}$$

$$\therefore R > P > Q > S$$

07. Ans: (b)

$$\text{Sol: } I_{\text{disk}} = \frac{mr^2}{2}$$

$$I_1 = \frac{mr_1^2}{2}, \quad C_{s1} = 0.04$$

$$I_2 = 4 \times mr_1^2 = 4I_1$$

$$C_{s2} = \frac{I_1}{I_2} \times C_{s1} = 0.01 \Rightarrow 1\% \text{ reduce}$$

08. Ans: (b)

Sol: For same ΔE and ω

$$C_s \propto I$$

$$\frac{C_{s1}}{C_{s2}} = \frac{I_2}{I_1} = \frac{2I}{I}$$

$$C_{s2} = \frac{C_{s1}}{2} = \frac{0.04}{2} = 0.02$$

09. Ans: (a)

Sol: Let the cycle time = t

$$\text{Actual punching time} = t/4$$

$$W = \text{energy developed per cycle}$$

$$\begin{aligned} \text{Energy required in actual punching} \\ = 3W/4 \end{aligned}$$

$$\text{During } 3t/4 \text{ time, energy consumed} = W/4$$


$$E_{\max} = \frac{3W}{4}, \quad E_{\min} = \frac{E}{4}$$

$$\Delta E = E_{\max} - E_{\min} = \frac{E}{2}$$

$$\frac{\Delta E}{E} = 0.5$$

10. Ans: (c)

Sol:

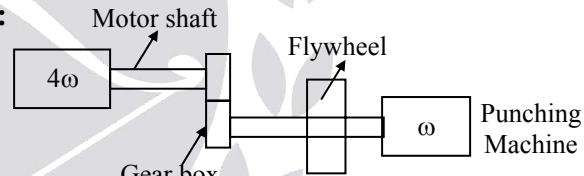

$$C_s = 0.032$$

$$\text{Gear ratio} = 4$$

$$I\omega'^2 \times C_s' = I\omega^2 C_s$$

$$C_s' = C_s \left(\frac{\omega}{\omega'} \right)^2 = \frac{C_s \times \omega^2}{16\omega'^2} = \frac{C_s}{16}$$

$$= 0.0032 / 16 = 0.002$$

(by taking moment of Inertia, $I = \text{constant}$).

Thus, if the flywheel is shifted from machine shaft to motor shaft when the fluctuation of energy (ΔE) is same, then coefficient of fluctuation of speed decreases by 0.2% times.

11. Ans: 0.5625

Sol: The flywheel is considered as two parts $\frac{m}{2}$

as rim type with Radius R and $\frac{m}{2}$ as disk

type with Radius $\frac{R}{2}$

$$I_{\text{Rim}} = \frac{m}{2} R^2,$$

$$I_{\text{disk}} = \frac{1}{2} \times \frac{m}{2} \times \left(\frac{R}{2}\right)^2 = \frac{mR^2}{16}$$

$$I = \frac{mR^2}{2} + \frac{mR^2}{16}$$

$$= \frac{9}{16} mR^2$$

$$\therefore \alpha = 0.5625$$

12. Ans: 104.71

Sol: N = 100 rpm

$$T_{\text{mean}} = \frac{1}{\pi} \int_0^\pi T d\theta$$

$$= \frac{1}{\pi} \int_0^\pi (10000 + 1000 \sin 2\theta - 1200 \cos 2\theta) d\theta$$

$$= \frac{1}{\pi} [10000\theta - 500 \cos 2\theta - 600 \sin 2\theta]_0^\pi$$

$$= 10000 \text{ Nm}$$

$$\text{Power} = \frac{2\pi NT}{60}$$

$$= \frac{2 \times \pi \times 100 \times 10000}{60} = 104719.75 \text{ W}$$

$$P = 104.719 \text{ kW}$$

Chapter
4

Governor

01. Ans: (a)

Sol: As the governor runs at constant speed, net force on the sleeve is zero.

02. Ans: (d)

Sol: At equilibrium speed, friction at the sleeve is zero.

03. Ans: (a)

$$\text{Sol: } mr\omega^2 = \frac{r}{h} \left(mg + \frac{Mg(1+k)}{2} \right)$$

$$k = 1$$

$$\omega^2 = \frac{9.8}{2 \times 0.2} (10 + 2)$$

$$\omega = 17.15 \text{ rad/sec}$$

04. Ans: (a)

$$\text{Sol: } mr\omega^2 a = \frac{1}{2} \times 200 \times \delta \times a$$

$$\delta = \frac{1 \times 20^2 \times 0.25 \times 2}{200}$$

$$= 0.5 \times 2 = 1 \text{ cm}$$

05. Ans: (a)

$$\text{Sol: } mr\omega^2 \times a = \left(\frac{F_s}{2} \right) \times a$$

$$F_s = 2mr\omega^2$$

$$= 2 \times 1 \times 0.4 \times (20)^2 = 320 \text{ N}$$

06. Ans: (c)

Sol: A governor is used to limit the change in speed of engine between minimum to full load conditions, the sensitiveness of a governor is defined as the ratio of difference between maximum and minimum speed to mean equilibrium speed, thus,

$$\text{sensitiveness} = \frac{\text{Range of speed}}{\text{mean speed}} = \left(\frac{\frac{N_1 - N_2}{N_1 + N_2}}{2} \right)$$

$$\text{Where, mean speed, } N = \frac{N_1 + N_2}{2}$$

N_1 = maximum speed corresponding to no-load conditions.

N_2 = minimum speed corresponding to full load conditions.

07. Ans: (b)**08. Ans: (a)**

Sol: $r_1 = 50 \text{ cm}$, $F_1 = 600 \text{ N}$

$$F = a + rb$$

$$600 = a + 50 b$$


$$700 = a + 60 b$$

$$10 b = 100$$

$$b = 10 \text{ N/cm}$$

$$a = 100 \text{ N}$$

$$F = 100 + 10 r$$

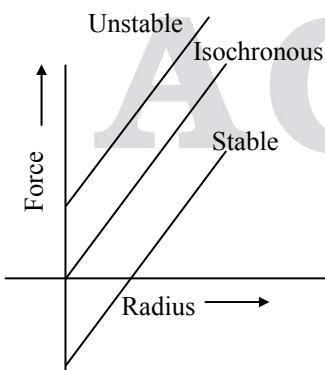


This is unstable governor. It can be isochronous if its initial compression is reduced by 100 N.

09. Ans: (d)


Sol: By increasing the dead weight in a porter governor it becomes more sensitive to speed change.

10. Ans: (d)

Sol:

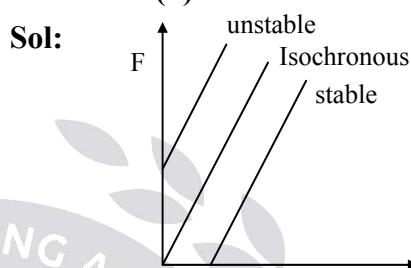**11. Ans: (a)**

Sol:

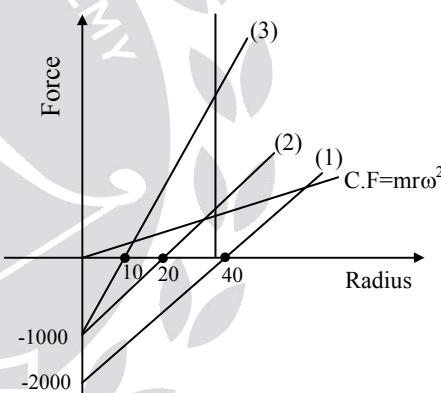

At radius, $r_1 = F_1 < F_2 < F_3$

∴ As Controlling force is less suitable 1 is for low speed and 2 for high speed ad 3 is for still high speed.

(1) is active after 40 cm

(2) is active after 20 cm


(3) is active after 10 cm

At given radius above 20

$$F_3 > F_2$$

$$mr\omega_3^2 > mr\omega_2^2$$

$$\omega_3 > \omega_2$$

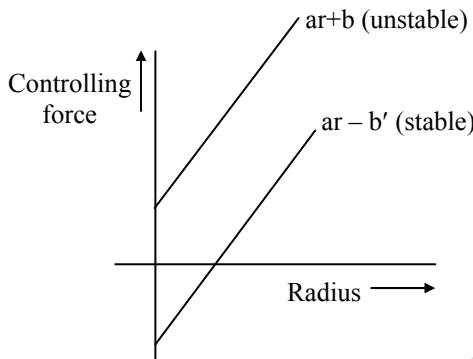12. Ans: (b)
Sol:


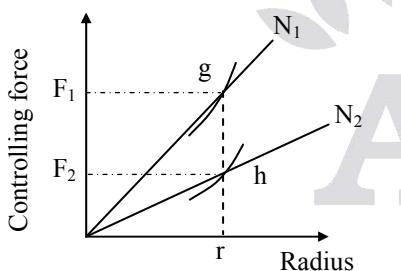
To make the governor stable spring stiffness should be decreased.

13. Ans: (c)

Sol: A governor is said to be sensitive if for a given fractional change in speed, displacement of sleeve is high.

14. Ans: (c)

Sol: If friction is taken into account, two or more controlling force are obtained as shown in figure.



In all, three curves of controlling force are obtained as follows.

- (a) for steady run (neglecting friction)
- (b) while sleeve moves up (f positive)
- (c) while sleeve moves down (f negative)

The vertical intercept gh signifies that between the speeds corresponding to gh , the radius of the ball does not change while direction of movement of sleeve does. Between speeds N_1 and N_2 , the governor is insensitive.

15. Ans: (b)

Sol: A governor is stable if radius of rotation of ball is increases as the speed increases.

$$\text{Centripetal force, } F = mr\omega^2$$

$$\Rightarrow \frac{F}{r} = m\omega^2$$

Slope of the centripetal force represents speed. Higher the slope, higher will be the speed.

$$\text{when } r = 2 \text{ cm; } F = 14 \text{ N}$$


$$\therefore \frac{F}{r} = \frac{14}{2} = 7$$

$$\text{when } r = 6 \text{ cm; } F = 38 \text{ N}$$

$$\frac{F}{r} = \frac{38}{6} = 6.33$$

As the radius increases slope of the centripetal force curve decreases and therefore speed of the governor decreases.

Thus the governor is unstable.

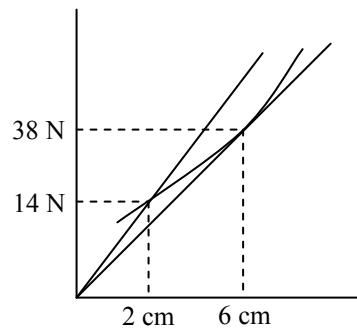

16. Ans:

Sol: Given, $m = 8 \text{ kg}$

$$F_1 = 1500 \text{ N at } r_1 = 0.2 \text{ m and}$$

$$F_2 = 887.5 \text{ N at } r_2 = 0.13 \text{ m,}$$

For spring controlled governor, controlling force is given by

$$F = a r + b$$

$$1500 = a \times 0.2 + b$$

$$887.5 = a \times 0.13 + b$$

$$\therefore a = 8750, b = -250$$

$$F = 8750 r - 250$$

$$\text{At } r = 0.15 \text{ m,}$$

$$F = 8750 \times 0.15 - 250 = 1062.5 \text{ N}$$

So, controlling force, $F = 1062.5 \text{ N}$

$$F = mr\omega^2$$

$$1062.5 = 8 \times 0.15 \omega^2$$

$$\therefore \omega = 29.72 \text{ rad/s}$$

$$N = \frac{60\omega}{2\pi} = 284 \text{ rpm}$$

For isochronous speed

$$F = a r = 8750 \times 0.15 = 1312.5 \text{ N}$$

$$F = mr\omega^2$$

$$1312.5 = 8 \times 0.5 \times \omega^2$$

$$\Rightarrow \omega = 33.07 \text{ rad/s}$$

$$N = \frac{60\omega}{2\pi} = 316 \text{ rpm}$$

The increase in tension is 250 N to make the governor isochronous.

Chapter
5
Balancing
01. Ans: (c)

Sol: unbalanced force (F_{un}) $\propto mr\omega^2$

Unbalance force is directly proportional to square of speed. At high speed this force is very high. Hence, dynamic balancing becomes necessary at high speeds.

02. Ans: (a)

Sol: Dynamic force $= \frac{W}{g} e \omega^2$

Couple $= \frac{W}{g} e \omega^2 a$

Reaction on each bearing $= \pm \frac{W}{g} e \omega^2 \frac{a}{l}$

Total reaction on bearing

$$= \left(\frac{W}{g} e \omega^2 \frac{a}{l} \right) - \left(\frac{W}{g} e \omega^2 \frac{a}{l} \right) = 0$$

03. Ans: (b)

Sol: Since total dynamic reaction is zero the system is in static balance.

04. Ans: (a)
05. Ans: (b)


Sol:

$$m_a = 5 \text{ kg}, r_a = 20 \text{ cm}$$

$$m_b = 6 \text{ kg}, r_b = 20 \text{ cm}$$

$$m_c = ?, r_c = 20 \text{ cm}$$

$$m_d = ?, \theta_c = ?, \theta_d = ?$$



Take reference plane as 'C'

For complete balancing

$$\sum mr = 0 \quad \& \quad \sum mrl = 0$$

$$2m_d \cos \theta_d - 9\sqrt{2} = 0$$

$$\Rightarrow m_d \cos \theta_d = 9\sqrt{2}$$

$$2m_d \sin \theta_d - 5 - 9\sqrt{2} = 0$$

$$m_d \sin \theta_d = -\frac{1}{2}(5 + 9\sqrt{2})$$

$$m_d = \sqrt{\left(\frac{9}{\sqrt{2}}\right)^2 + \left[\frac{1}{2}(5 + 9\sqrt{2})\right]^2} = 10.91 \text{ kg}$$

$$\theta_d = \tan^{-1} \left[\frac{\frac{1}{2}(5 + 9\sqrt{2})}{\frac{9}{\sqrt{2}}} \right] = 54.31^\circ$$

$$= 90 - 54.31 = 35.68 \text{ w.r.t 'A'}$$

$$m_c \cos \theta_c + m_d \cos \theta_d - 3\sqrt{2} = 0$$

$$\Rightarrow m_c \cos \theta_c + 10.91 \cos 54.31 - 3\sqrt{2} = 0$$

$$m_c \cos \theta_c = -2.122$$

$$m_c \sin \theta_c + m_d \sin \theta_d - 3\sqrt{2} + 5 = 0$$

$$m_c \sin \theta_c + 10.91 \sin 54.31 - 3\sqrt{2} + 5 = 0$$

$$m_c \sin \theta_c = -9.618$$

$$m_c = \sqrt{(-2.122)^2 + (-9.618)^2} = 9.85 \text{ kg}$$

$$\tan \theta_c = \frac{-9.618}{-2.122}$$

$$\theta_c = 257.56 \text{ or } 257.56 - 90 \text{ w.r.t 'A'}$$

$$= 167.56$$

S.No	m	(r×20)cm	(l×20)cm	θ	mr cos θ	mr sin θ	mr/l cos θ	mr/l sin θ
A	5	1	-1	90	0	5	0	-5
B	6	1	3	225	-3\sqrt{2}	-3\sqrt{2}	-9\sqrt{2}	-9\sqrt{2}
C	m_c	1	0	θ_c	$m_c \cos \theta_c$	$m_c \sin \theta_c$	0	0
D	m_d	1	2	θ_d	$m_d \cos \theta_d$	$m_d \sin \theta_d$	$2m_d \cos \theta_d$	$2m_d \sin \theta_d$

Common data Q. 06 & 07


06. Ans: (a)


$$\text{Sol: } m_1 = \text{kg}, \quad m_2 = 5 \text{ kg}, \quad r_1 = 10 \text{ cm}$$

$$r_2 = 20 \text{ cm}, \quad m_d = ?, \quad r_d = 10 \text{ cm}$$

$$m_1 r_1 = 100 \text{ kg cm}$$

$$m_2 r_2 = 100 \text{ kg cm}$$



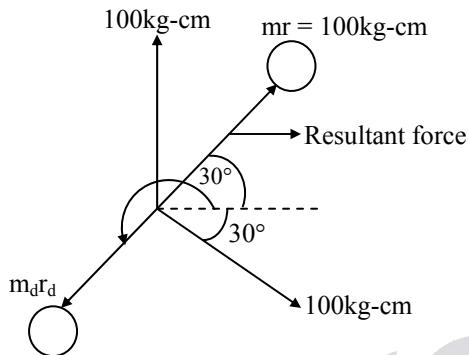


Keep the balancing mass m_d at exactly opposite to the resultant force

$$\begin{aligned} \therefore m_d r_d &= 100 \text{ kg-cm} \\ \Rightarrow m_d \times 10 &= 100 \text{ kg-cm} \\ m_d &= 10 \text{ kg cm} \\ \theta_d &= 180 + 30 = 210 \end{aligned}$$

07. Ans: (d)

Sol:



$$mr = 100 \text{ kg-cm} = 1 \text{ kgm}$$

$$N = 600 \text{ rpm} \Rightarrow \omega = \frac{2\pi N}{60} = 20\pi \text{ rad/s}$$


$$\begin{aligned} \text{Couple 'C'} &= mr\omega^2 \times 0.2 = 1 \times (20\pi)^2 \times 0.2 \\ &= 789.56 \text{ Nm} \end{aligned}$$

Reaction on the bearing

$$\begin{aligned} &= \frac{\text{couple}}{\text{distance between bearing}} \\ &= \frac{789.56}{0.4} = 1973.92 \text{ N} \end{aligned}$$

08. Ans: (a)

Sol:

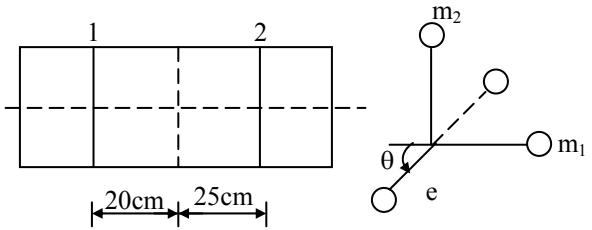

$$r_1 = 10 \text{ cm}, \quad r_2 = 10 \text{ cm}, \quad m_1 = 52 \text{ kg}$$

$$m_2 = 75 \text{ kg}, \quad \theta_1 = 0 \text{ (Reference)}$$

$$\theta_2 = 90^\circ, \quad m = 2000 \text{ kg}, \quad e = ?, \quad \theta = ?$$

$$me \cos\theta = m_1 r_1 = 520$$

$$me \sin\theta = m_2 r_2 = 750$$

$$\begin{aligned} me &= \sqrt{(m_1 r_1)^2 + (m_2 r_2)^2} = \sqrt{520^2 + 750^2} \\ &= 913 \text{ kg-cm} \end{aligned}$$

$$e = \left(\frac{913}{2000} \right) = 0.456 \text{ cm}$$

$$\theta = \tan^{-1} \left(\frac{m_2 r_2}{m_1 r_1} \right) = \tan^{-1} \left(\frac{75}{52} \right) = 55.26^\circ$$

$$= 180 + 55.26 = 235.26^\circ$$

w.r.t mass '1'.

09. Ans: (a)

Sol:

Plane	m (kg)	r (m)	L (m) (reference Plane A)	θ	F_x ($mrcos\theta$)	F_y ($mrsin\theta$)	C_x ($mr/cos\theta$)	C_y ($mr/sin\theta$)
D	2 kg.m		0.3	0	2	0	0.6	0
A	- m_a	0.5m	0	θ_a	$-0.5m_a \cos\theta_a$	$-0.5m_a \sin\theta_a$	0	0
B	- m_b	0.5m	0.5	θ_b	$-0.5m_b \cos\theta_b$	$-0.5m_b \sin\theta_b$	$-\frac{m_b}{4} \cos\theta_b$	$-\frac{m_b}{4} \sin\theta_b$

$$C_x = 0 \Rightarrow \frac{m_b \cos\theta_b}{4} = 0.6$$

$$C_y = 0 \Rightarrow \frac{m_b \sin\theta_b}{4} = 0$$

$$\Rightarrow m_b = 2.4 \text{ kg}, \quad \theta_b = 0$$

$$\Sigma F_x = 0$$

$$\Rightarrow 2 - 0.5 m_a \cos\theta_a - 0.5 m_b \cos\theta_b = 0$$

$$\Rightarrow \frac{m_a}{2} \cos\theta_a = 0.8$$


$$\Sigma F_y = 0 \Rightarrow \frac{m_a}{2} \sin\theta_a = 0$$

$$\therefore \theta_a = 0^\circ, \quad m_a = 1.6 \text{ kg}$$

(Note: mass is to be removed so that is taken as -ve).

10. Ans: (a)

Sol:



$$\begin{aligned} \frac{F_x}{\omega^2} &= m_1 r_1 + m_2 r_2 \cos\theta \\ &= 20 \times 15 + 25 \times 20 \cos 135^\circ \\ &= -53.55 \text{ gm-cm} \end{aligned}$$

$$\frac{F_y}{\omega^2} = m_2 r_2 \sin\theta = 25 \times 20 \sin 135^\circ$$

$$= 353.553 \text{ gm-cm}$$

$$m_b r_b = \sqrt{F_x^2 + F_y^2}$$

$$\Rightarrow m_b = \frac{\sqrt{F_x^2 + F_y^2}}{r_b}$$

$$= \frac{\sqrt{(-53.55)^2 + (353.553)^2}}{20} = 17.88 \text{ gm}$$

$$\theta_b = \tan^{-1} \frac{F_y}{F_x} = \tan^{-1} \left(\frac{353.553}{-53.55} \right) = 98.7^\circ$$

1995


11. Ans: 30 N

Sol:

Crank radius

$$= \text{stroke}/2 = 0.1 \text{ m},$$

$$\omega = 10 \text{ rad/sec}$$



Unbalanced force along perpendicular to the line of stroke = $m_b r \omega^2 \sin 30^\circ$

$$\begin{aligned} &= 6 \times (0.1) \times (10)^2 \sin 30^\circ \\ &= 30 \text{ N} \end{aligned}$$

12. Ans: (b)**Sol:**

- Primary unbalanced force = $m r \omega^2 \cos \theta$
At $\theta = 0^\circ$ and 180° , Primary force attains maximum.

$$\text{Secondary force} = \frac{m r \omega^2}{n} \cos 2\theta \text{ where } n \text{ is}$$

obliquity ratio. As $n > 1$, primary force is greater than secondary force.

- Unbalanced force due to reciprocating mass varies in magnitude. It is always along the line of stroke.

13. Ans: (b)

Sol: In balancing of single-cylinder engine, the rotating balance is completely made zero and the reciprocating unbalance is partially reduced.

14. Ans: (b)

Sol: $m = 10 \text{ kg}$, $r = 0.15 \text{ m}$,

$$c = 0.6, \quad \theta = 60^\circ, \quad \omega = 4 \text{ rad/sec}$$

Residual unbalance along the line of stroke


$$\begin{aligned} &= (1 - c) m r \omega^2 \cos \theta \\ &= (1 - 0.6) \times 10 \times 0.15 \times 4^2 \cos 60 \\ &= 4.8 \text{ N} \end{aligned}$$

15. Ans: 2

Sol: By symmetric two system is in dynamic balance when

$$mea = m_1 e_1 a_1$$

$$m_1 = m \frac{e}{e_1} \cdot \frac{a}{a_1} = 1 \times \frac{50}{20} \frac{2}{2.5} = 2 \text{ kg}$$

16. Ans: (a)**Sol:**

$$m_1 = \frac{m L_2}{L_1 + L_2} = \frac{100 \times 60}{100} = 60 \text{ kg}$$

$$m_2 = \frac{m L_1}{L_1 + L_2} = \frac{100 \times 40}{100} = 40 \text{ kg}$$

$$\begin{aligned} I &= m_1 L_1^2 + m_2 L_2^2 \\ &= 60 \times 40^2 + 40 \times 60^2 \\ &= 240000 \text{ kg cm}^2 \\ &= 24 \text{ kg m}^2 \end{aligned}$$

**Chapter
6**
Cams
01. Ans: (d)
Sol: Pressure angle is given by

$$\tan \phi = \frac{\frac{dy(\theta)}{d\theta} - e}{y(\theta) + \sqrt{(r_p)^2 - (e)^2}}$$

where,
 ϕ is pressure angle ,
 θ is angle of rotation of cam
 e is eccentricity
 r_p is pitch circle radius
 y is follower displacement

02. Ans: (d)
Sol: Cycloidal motion

$$y = \frac{h}{2\pi} \left(\frac{2\pi\theta}{\phi} - \sin\left(\frac{2\pi}{\phi}\theta\right) \right)$$

$$\dot{y}_{\max} = \frac{2h\omega}{\phi}$$

-----(1)

Simple harmonic motion :

$$\dot{y}_{\max} = \left(\frac{\pi}{2} \frac{h\omega}{\phi} \right)$$

-----(2)

Uniform velocity :

$$\dot{y} = \frac{h\omega}{\phi}$$

-----(3)

From (1), (2) and (3) we observe that

$$V_{cycloidal} > V_{SHM} > V_{UV}$$

03. Ans: (b)
04. Ans: (b)
Sol: $L = 4 \text{ cm}$, $\phi = 90^\circ = \pi/2 \text{ radian}$,

$$\omega = 2 \text{ rad/sec}, \quad \theta = \frac{2}{3} \times 90 = 60^\circ$$

$$\frac{\theta}{\phi} = \frac{2}{3}$$

$$s(t) = \frac{L}{2} \left(1 - \cos \frac{\pi\theta}{\phi} \right)$$


$$= 2(1 - \cos 120) = 3 \text{ cm}$$

$$V(t) = \frac{L}{2} \times \frac{\pi}{\phi} \times \omega \times \sin\left(\frac{\pi\theta}{\phi}\right)$$

$$= \frac{4}{2} \times 2 \times 2 \sin(120) = 7 \text{ cm/s}$$

$$a(t) = \frac{L}{2} \left(\frac{\pi}{\phi} \right)^2 \times \omega^2 \times \cos\left(\frac{\pi\theta}{\phi}\right)$$

$$= \frac{4}{2} \times 2^2 \times 2^2 \times \cos(120) = -16 \text{ cm/sec}^2$$

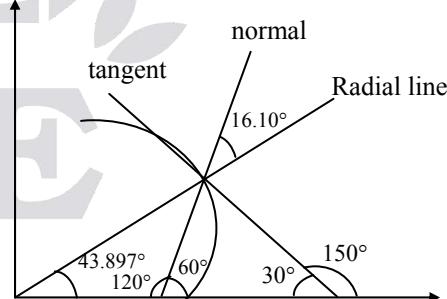05. Ans: (b)
Sol:


$$x = 15 \cos \theta,$$

$$y = 10 + 5 \sin \theta$$

$$\tan \phi = \frac{dy}{dx} = \frac{\frac{dy}{d\theta}}{\frac{dx}{d\theta}} = \frac{5 \cos \theta}{-15 \sin \theta}$$

at $\theta = 30^\circ$,

$$\tan \phi = \frac{5 \times \frac{\sqrt{3}}{2}}{-15 \times \frac{1}{2}} = -\frac{1}{\sqrt{3}} \Rightarrow \phi = 150^\circ$$

$$\tan \theta = \frac{y}{x} = \frac{10 + 5 \sin \theta}{15 \cos \theta} = \frac{10 + 5 \sin 30}{15 \cos 30}$$

$$\theta = 43.897^\circ$$

Pressure angle is angle between normal and radial line $= 16.10^\circ$.

or $x = 15 \cos \theta$,

$$y = 10 + 5 \sin \theta \text{ at } \theta = 30^\circ$$

$$\left(\frac{x}{15}\right)^2 + \left(\frac{y-10}{5}\right)^2 = 1$$

$$x = \frac{15\sqrt{3}}{2}, \quad y = 12.5$$

$$\frac{2x}{15^2} + \frac{2(y-10)}{5^2} \cdot \frac{dy}{dx} = 0$$

$$\frac{dy}{dx} = \frac{-x}{(y-10)9} = \frac{-15\sqrt{3}}{2\left(\frac{3}{2}\right)\times 9} = \frac{-1}{\sqrt{3}}$$

$$\tan \theta = \frac{-1}{\sqrt{3}}$$

Then normal makes with x-axis

$$\tan^{-1}(\sqrt{3}) = 60^\circ$$


$$\tan \theta = \frac{y}{x} = \frac{10 + 5 \sin \theta}{15 \cos \theta} = \frac{10 + 5 \sin 30}{15 \cos 30}$$

$$\theta = 43.897^\circ$$

With follower axis angle made by normal (pressure angle) $= 60^\circ - 43.897^\circ = 16.10^\circ$

06. Ans: (a)

Sol:

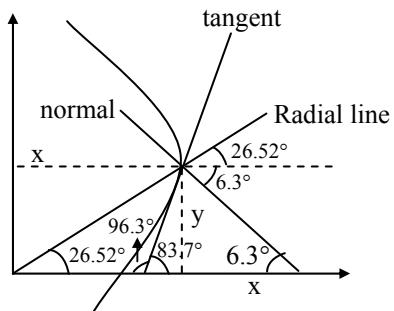

Let α be the angle made by the normal to the curve

$$\left(\frac{dy}{dx}\right)_{(4,2)} = 9$$

$$\tan \alpha = \frac{dy}{dx} = 4x - 7$$

At $x = 4$ & $y = 2$,

$$\alpha = \tan^{-1}(9) = 83.7^\circ$$

The normal makes an angle

$$= \tan^{-1}\left(\frac{-1}{9}\right) = 6.3^\circ \text{ with x axis}$$

$$\theta = \tan^{-1}\left(\frac{2}{4}\right) = 26.52^\circ$$

Pressure angle is angle between normal and radial line $= 26.52 + 6.3 = 32.82^\circ$

07. Ans: (b)

Sol: For the highest position the distance between the cam center and follower

$$= (r + 5) \text{ mm}$$


For the lowest position it is $(r - 5) \text{ mm}$

So the distance between the two positions

$$= (r + 5) - (r - 5) = 10 \text{ mm}$$

08. Ans: (a)

Sol:

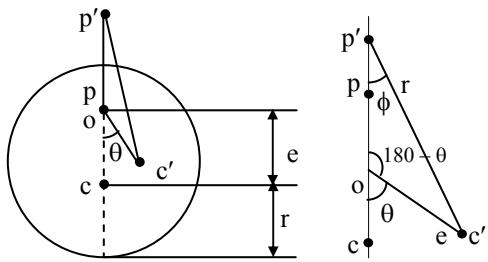

When 'c' move about 'o' through ' θ ', point 'p' moves to p' . ' ϕ ' is angle between normal drawn at point of contact which always passes through centre of circle and follower axis. So this is pressure angle.

From Δ le $p'oc'$

$$\frac{r}{\sin(\pi - \theta)} = \frac{e}{\sin \phi}$$

$$\sin \phi = \frac{e}{r} \sin \theta$$

ϕ is maximum $\theta = 90^\circ$

$$\sin \phi = \frac{e}{r}$$

Pressure angle s maximum at pitch point

$$\phi = \sin^{-1}\left(\frac{e}{r}\right) = 30^\circ$$

**Chapter
7**


Gyroscope

01. Ans: (c)

Sol: Due to Gyroscopic couple effect and centrifugal force effect the inner wheels tend to leave the ground.

02. Ans: (d)


Sol: Pitching is angular motion of ship about transverse axis.

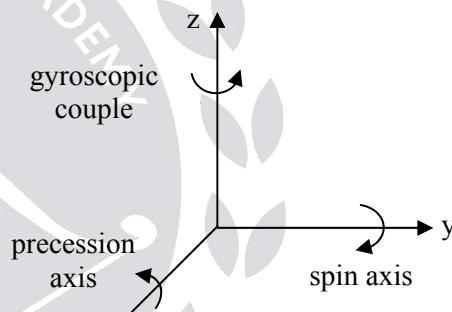

Due to pitching gyroscopic couple acts about vertical axis.

03.

Sol: $m = 1000 \text{ kg}$, $r_k = 200 \text{ mm}$

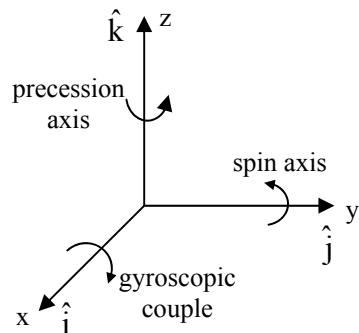

$$I = 1000 \times (0.2)^2 = 40 \text{ kg-m}^2$$

$N = 5000 \text{ rpm (CCW) looking from stern}$

$$\omega = \frac{2\pi \times 5000}{60} = 523.33 \text{ rpm}$$

$$\bar{\omega} = -523.33 \hat{j}$$

Precession velocity


$$\omega_p = \frac{V}{r} = \frac{25 \times 0.514}{400} = 0.032125 \text{ rad/s}$$

$$\bar{\omega}_p = 0.03212 \hat{k}$$

Gyroscopic couple = $I(\bar{\omega} \times \bar{\omega}_p)$

$$G = 40(-523.33 \hat{j} \times 0.032125 \hat{k}) \\ = -672 \hat{i} \text{ N-m}$$

Now,




$$R_1 = -R_2 = \frac{M}{L} = -\frac{672}{1.5} = 448 \text{ N}$$

$R_1 = 448 \text{ N}$ (Acting downwards)

$R_2 = 448 \text{ N}$ (Acting upwards)

Now reaction due to weight

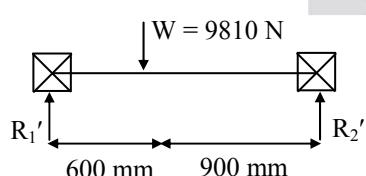

$$R'_1 = \frac{9810 \times 900}{1500} = 5886 \text{ N (upwards)}$$

$$R'_2 = \frac{9810 \times 600}{1500} = 3924 \text{ N (upwards)}$$

Total bearing reaction at A

$$= R_A + R_A'$$

$$= 5886 - 448 = 5438 \text{ N}$$

Total bearing reaction at B


$$= R_B + R_B'$$

$$= 3924 + 448 = 4372 \text{ N}$$

Bow falls and stern rises.

04.

Sol:

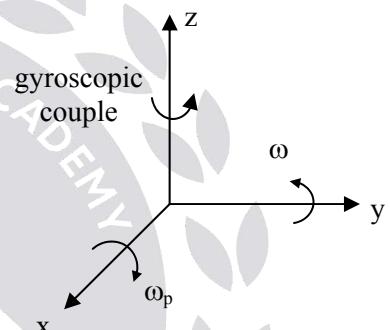

$$k = 220 \text{ mm}, \quad m = 210 \text{ kg}$$

$$I = 210 \times (0.22)^2 = 10.164 \text{ kg-m}^2$$

$$\omega = \frac{2\pi \times 1800}{60} = 1884.95 \text{ rad/s}$$

$$\omega_p = \frac{1200 \times \frac{5}{18}}{3800} = 0.0877 \text{ rad/s}$$

$$M = I \omega \omega_p \\ = 10.164 \times 0.0877 \times 1884.95 \\ = 1681 \text{ N-m}$$

05. Ans: 200

Sol: $R = 100 \text{ m}, \quad v = 20 \text{ m/sec},$

$$\omega_p = \frac{V}{R} = 0.2 \frac{\text{rad}}{\text{sec}} \quad \omega_s = 100 \text{ rad/sec}$$

$$I = 10 \text{ kg-m}^2$$

Gyroscopic moment


$$= I\omega_s \omega_p = 10 \times 0.2 \times 100 \text{ N-m}$$

$$= 200 \text{ N-m}$$


06. Ans:

Sol:

(i)



The gyroscopic couple is $= I\omega\Omega$

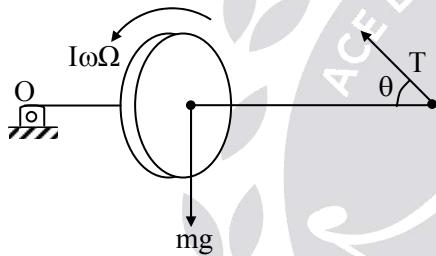

$$\sum M_o = 0$$

$$2a \cdot T \sin \theta + I\omega\Omega = mg \times a$$

$$\frac{2a \cdot T \cdot b}{\sqrt{4a^2 + b^2}} + \frac{mr^2}{2} \omega\Omega = mg \times a$$

$$T = \frac{\sqrt{4a^2 + b^2}}{2ab} \left(mga - \frac{mr^2}{2} \omega\Omega \right)$$

For clockwise rotation of precession

(ii) $\sum M_o = 0$

$$2a \cdot T \sin \theta - I\omega\Omega = mg \times a$$

$$T = \frac{\left(mga + \frac{1}{2} mr^2 \omega\Omega \right) (b^2 + 4a^2)^{\frac{1}{2}}}{2ab}$$

Chapter
8

Mechanical Vibrations


01. Ans: (b)

Sol: $T = 2\pi \sqrt{\frac{L}{g}} \Rightarrow 0.5 = 2\pi \sqrt{\frac{L}{9.81}}$

$$\Rightarrow L = 62.12 \text{ mm}$$

02. Ans: (d)

Sol:

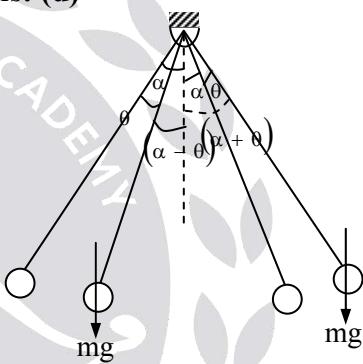

Let the system is displaced by θ from the equilibrium position. Its position will be as shown in figure.

By considering moment equilibrium about the axis of rotation (Hinge)

$$\therefore I\ddot{\theta} + mg\ell \sin(\alpha + \theta) - mg\ell \sin(\alpha - \theta) = 0$$

$$I = m\ell^2 + m\ell^2 = 2m\ell^2$$

After simplification

$$2m\ell^2\ddot{\theta} + 2mg\ell \cos \alpha \sin \theta = 0$$

For small oscillations (θ is small) $\sin \theta = \theta$

$$\therefore 2m\ell^2\ddot{\theta} + 2mg\ell \cos \alpha \cdot \theta = 0$$

$$\omega_n = \sqrt{\frac{2mg\ell \cos \alpha}{2m\ell^2}} = \sqrt{\frac{g \cos \alpha}{\ell}}$$

03. Ans: (c)

Sol: Let, V_0 is the initial velocity,
'm' is the mass

Equating Impulse = momentum

$$mV_0 = 5\text{kN} \times 10^{-4} \text{ sec}$$

$$= 5 \times 10^3 \times 10^{-4} = 0.5 \text{ sec}$$

$$\therefore V_0 = \frac{0.5}{m} = 0.5 \text{ m/sec}$$

$$\omega_n = \sqrt{\frac{K}{m}} = \sqrt{\frac{10000}{1}} = 100 \text{ rad/sec}$$

When the free vibrations are initiate with
initial velocity,

The amplitude

$$X = \frac{V_0}{\omega_n} \text{ (Initial displacement)}$$

$$\therefore X = \frac{V_0}{\omega_n} = \frac{0.5 \times 10^3}{100} = 5 \text{ mm}$$

04. Ans: (a)

Sol: Note: ω_n depends on mass of the system
not on gravity

$$\therefore \omega_n \propto \frac{1}{\sqrt{m}}$$


$$\text{If } \omega_n = \sqrt{\frac{g}{\delta}}, \quad \delta = \frac{mg}{K}$$

$$\therefore \omega_n = \sqrt{\left(\frac{g}{\frac{mg}{K}}\right)} = \sqrt{\frac{K}{m}}$$

$\therefore \omega_n$ is constant every where.

05. Ans: (c)

Sol:

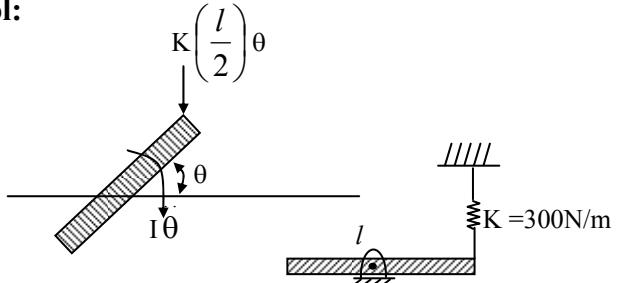

By energy method

$$E = \frac{1}{2} I \dot{\theta}^2 + \frac{1}{2} Kx^2 = \text{constant}$$

$$E = \frac{1}{2} I \dot{\theta}^2 + \frac{1}{2} K \times \left(\frac{l}{2} \theta\right)^2 = \text{constant}$$

Differentiating w.r.t 't'

$$\frac{dE}{dt} = I \ddot{\theta} + \frac{K}{2} \times \frac{l^2}{4} \times 2\theta = 0$$

$$I = \frac{m\ell^2}{12}$$


$$\frac{m\ell^2}{12} \ddot{\theta} + \frac{K\ell^2}{4} \theta = 0$$

$$\Rightarrow \ddot{\theta} + \frac{3K}{m} \theta = 0$$

$$\Rightarrow \omega_n = \sqrt{\frac{3K}{m}} = 30 \text{ rad/sec}$$

06. Ans: (a)

Sol:



Assume that in equilibrium position mass M is vertically above 'A'. Consider the displaced position of the system at any instant as shown above figure.

If Δ_{st} is the static extension of the spring in equilibrium position, its total extension in the displaced position is $(\Delta_{st} + a\theta)$.

From the Newton's second law, we have

$$I_0 \ddot{\theta} = Mg(L + b\theta) - k(\Delta_{st} + a\theta)a \dots (1)$$

But in the equilibrium position

$$MgL = k\Delta_{st}a$$

Substituting the value in equation (1), we

$$\text{have } I_0 \ddot{\theta} = (Mgb - ka^2)\theta$$

$$\Rightarrow I_0 \ddot{\theta} + (ka^2 - Mgb)\theta = 0$$

$$\omega_n = \sqrt{\frac{ka^2 - Mgb}{I_0}}$$

$$\tau = 2\pi \sqrt{\frac{I_0}{ka^2 - Mgb}}$$

The time period becomes an imaginary quantity if $ka^2 < Mgb$. This makes the system unstable. Thus the system to vibrate the limitation is

$$ka^2 > Mgb$$


$$b < \frac{ka^2}{Mg}$$

Where $W = Mg$

07. Ans: (a)

08.

Sol:

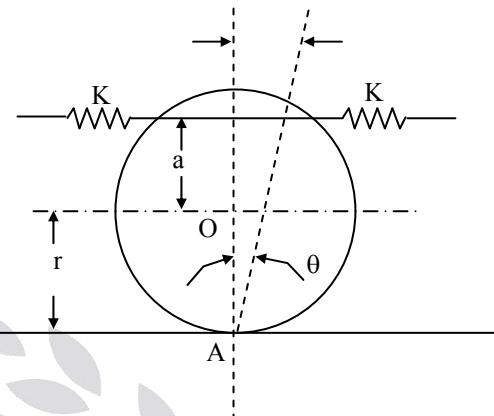

$$KE = \frac{1}{2}mr^2\dot{\theta}^2 + \frac{1}{2}I\dot{\theta}^2$$

$$= \frac{1}{2}mr^2\dot{\theta}^2 + \frac{1}{4}mr^2\dot{\theta}^2$$

$$= \frac{3}{4}mr^2\dot{\theta}^2$$

$$PE = \frac{1}{2}Kx^2 + \frac{1}{2}Kx^2 = Kx^2$$

$$x = (r + a)\theta$$

$$\Rightarrow PE = K\{(r + a)\theta\}^2$$

$$\frac{d}{dt}KE + \frac{d}{dt}PE = 0$$


Substituting in the above equation

$$\frac{3}{2}mr^2\ddot{\theta} + 2K(r + a)^2\theta = 0$$

Natural frequency

$$f_n = \frac{1}{2\pi} \sqrt{\frac{4K(r + a)^2}{3mr^2}}$$

$$\text{So } f_n = 47.74 \text{ Hz.}$$

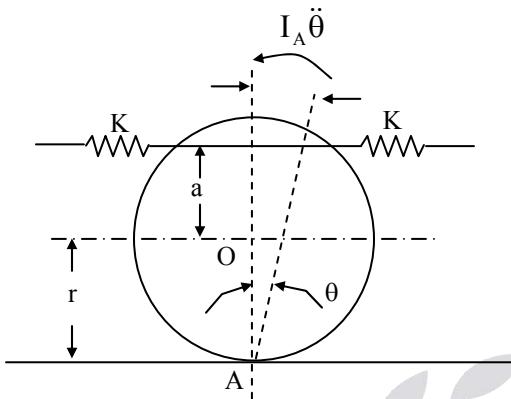OR


Taking the moment about the instantaneous centre 'A'.

$$I_A \ddot{\theta} + 2K(r+a)\theta(r+a) = 0$$

$$I_A = \frac{mr^2}{2} + mr^2 = \frac{3}{2}mr^2$$

$$\frac{3}{2}mr^2\ddot{\theta} + 2k(r+a)^2\theta = 0$$

$$\omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{2k(r+a)^2}{\frac{3}{2}mr^2}} = \sqrt{\frac{4k(r+a)^2}{3mr^2}}$$

09. Ans: (b)**Sol:**

By considering the equilibrium about the pivot 'O'

$$I_O \ddot{\theta} + mg \times \frac{L}{6} \sin \theta + K \frac{L}{3} \theta \times \frac{L}{3} = 0$$

$$\frac{mL^2}{9} \ddot{\theta} + \left(mg \times \frac{L}{6} + \frac{KL^2}{9} \right) \theta = 0 \quad (\because \sin \theta \approx \theta)$$


$$\omega_n = \sqrt{\frac{mg \times \frac{L}{6} + \frac{KL^2}{9}}{\frac{mL^2}{9}}} \Rightarrow \omega_n = \sqrt{\frac{3g}{2L} + \frac{K}{m}}$$

10. Ans: (d)**Sol:** $X_0 = 10 \text{ cm}$, $\omega_n = 5 \text{ rad/sec}$

$$X = \sqrt{X_0^2 + \left(\frac{v_0}{\omega_n} \right)^2}$$

If $v_0 = 0$ then $X = x_0$

$$\therefore X = x_0 = 10 \text{ cm}$$

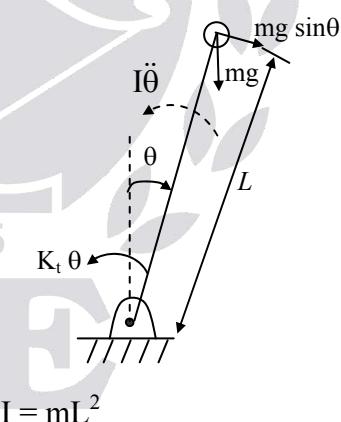11. Ans: (c) & 12. Ans: (c)**Sol:**

$$I = mL^2$$

The equation of motion is

$$mL^2 \ddot{\theta} + (K_t - mgL)\theta = 0$$

Inertia torque = mL^2

$$\begin{aligned} \text{Restoring torque} &= K_t - mgL \sin \theta \\ &= (K_t - mgL)\theta \end{aligned}$$

13. Ans: 0.0658 N.m²

Sol: For a Cantilever beam stiffness, $K = \frac{3EI}{\ell^3}$

$$\text{Natural frequency, } \omega_n = \sqrt{\frac{K}{m}} = \sqrt{\frac{3EI}{m\ell^3}}$$

Given $f_n = 100 \text{ Hz}$

$$\Rightarrow \omega_n = 2\pi f_n = 200\pi$$


$$200\pi = \sqrt{\frac{3EI}{m\ell^3}}$$

Flexural Rigidity

$$EI = \frac{(200\pi)^2 \cdot m\ell^3}{3} = 0.0658 \text{ N.m}^2$$

14. Ans: (d)

Sol: Free body diagram



Moment equilibrium about hinge


$$m2r\ddot{\theta}.2r + k\theta.r = 0$$

$$4mr^2\ddot{\theta} + kr^2\theta = 0$$

$$\omega_n = \sqrt{\frac{kr^2}{4mr^2}} = \sqrt{\frac{k}{4m}} = \sqrt{\frac{400}{4}}$$

15. Ans: (a)

Sol:

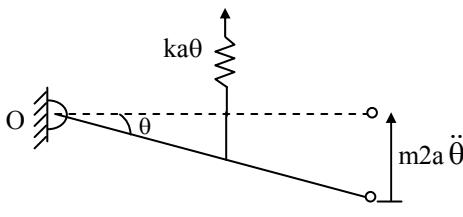

By taking the moment about 'O', $\Sigma m_o = 0$

$$(m2a\ddot{\theta} \times 2a) + (ka\theta \times a) = 0$$

$$\Rightarrow 4a^2 m \ddot{\theta} + ka^2 \theta = 0$$

Where, $m_{eq} = 4a^2 m$, $k_{eq} = ka^2$

$$\text{Natural frequency, } \omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{ka^2}{4a^2 m}} = \sqrt{\frac{k}{4m}}$$

$$= \sqrt{\frac{ka^2}{4a^2 m}} = \sqrt{\frac{k}{4m}} \text{ rad/sec}$$


$$[\because \omega_n = 2\pi f]$$

$$\Rightarrow f = \frac{\omega_n}{2\pi} = \frac{1}{2\pi} \times \sqrt{\frac{k}{4m}} \text{ Hz}$$

16. Ans: (a)

Sol: Moment equilibrium above instantaneous centre (contact point)

$$-k(a+d)\theta.(a+d) = I_c \ddot{\theta}$$

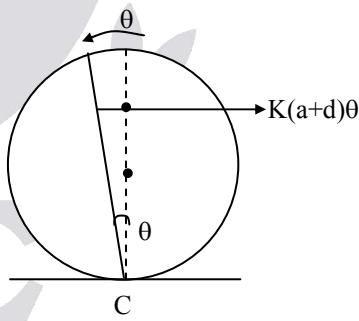

$$I_c = \frac{3}{2} Ma^2 ,$$

$$\omega_a = \sqrt{\frac{k(a+d)^2}{\frac{3}{2} Ma^2}}$$

$$\omega_n = \sqrt{\frac{2k(a+d)^2}{3Ma^2}}$$

17. Ans: 10 (range 9.9 to 10.1)

Sol: $KE = \frac{1}{2}mx^2 + \frac{1}{2}I\dot{\theta}^2$

$$m = 5 \text{ kg}, \quad \theta = \frac{x}{r}$$

$$I = \frac{20 \times r^2}{2} = 10r^2$$

$$KE = \frac{1}{2}5x^2 + \frac{1}{2}10r^2 \cdot \frac{\dot{x}^2}{r^2} = \frac{1}{2}(15)\dot{x}^2$$

$$\therefore m_{eq} = 15$$

$$PE = \frac{1}{2}kx^2$$

$$\therefore k_{eq} = k = 1500 \text{ N/m}$$

Natural frequency

$$\omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{1500}{15}} = 10 \text{ rad/sec}$$

18. Ans: (b)

Sol: In damped free vibrations the oscillatory motion becomes non-oscillatory at critical damping.

Hence critical damping is the smallest damping at which no oscillation occurs in free vibration

19. Ans: (a)

Sol: $\omega_n = 50 \text{ rad/sec} = \sqrt{\frac{5}{m}}$

If mass increases by 4 times

$$\omega_{n_1} = \sqrt{\frac{k}{4m}} = \frac{1}{2} \times \sqrt{\frac{k}{m}} = \frac{50}{2} = 25 \text{ rad/sec}$$

Damped frequency natural frequency,

$$\omega_d = \sqrt{1 - \xi^2} \times \omega_n$$

$$\Rightarrow 20 = \sqrt{1 - \xi^2} \times 25 = 0.6 = 60\%$$

20. Ans: (a)

Sol: $K_1, K_2 = 16 \text{ MN/m}$

$$K_3, K_4 = 32 \text{ MN/m}$$

$$K_{eq} = K_1 + K_2 + K_3 + K_4$$

$$m = 240 \text{ kg}$$

$$\omega_n = \sqrt{\frac{K_e}{m}}$$


$$K_{eq} = ((16 \times 2) + (32 \times 2)) \times 10^6 = 96 \times 10^6 \text{ N/m}$$

$$\omega_n = \sqrt{\frac{96 \times 10^6}{240}} = 632.455 \text{ rad/sec}$$

$$N = \frac{\omega_n \times 60}{2\pi} = 6040 \text{ rpm}$$

21. Ans: (a)

Sol:

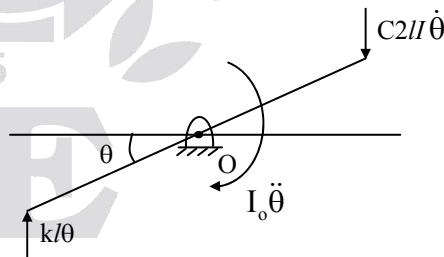

For slender rod, $I_o = \left[\rho \frac{x^3}{3} \right]_{-\ell}^{2\ell}$

$$= \frac{\rho}{3} \times (8\ell^3 + \ell^3) = \frac{9\rho\ell^3}{3} = 3\rho\ell^3 = m\ell^2$$

Where, $\rho = m/3l$

Considering the equilibrium at hinge 'O'.

$$\begin{aligned}
I_o \ddot{\theta} + c2l\dot{\theta} \times 2l + kl\theta \times l &= 0 \\
\Rightarrow ml^2\ddot{\theta} + 4l^2c\dot{\theta} + kl^2\theta &= 0 \\
I_{\text{equivalent}} = ml^2, C_{\text{eq}} = 4l^2c, k_{\text{eq}} = kl^2
\end{aligned}$$


22. Ans: (b)

Sol: Damping ratio, $\xi = \frac{c}{c_c} = \frac{c_{\text{eq}}}{2\sqrt{k_{\text{eq}}m_{\text{eq}}}}$

$$\begin{aligned}
&= \frac{4l^2c}{2\sqrt{kl^2 \times ml^2}} \\
&= \frac{4l^2c}{2\sqrt{mk\ell^4}} = \frac{2c}{\sqrt{km}}
\end{aligned}$$

23. Ans: (a)

Sol:

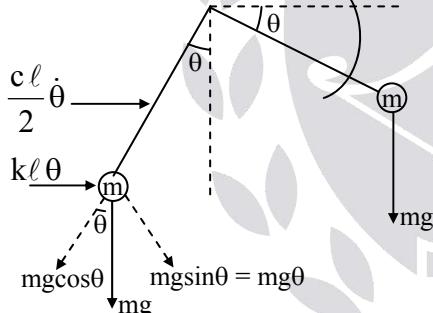

$$I = m(2l)^2 + ml^2 = 5ml^2$$

The equation of motion is

$$\begin{aligned}
(m \times (2l)^2 + ml^2)\ddot{\theta} + \frac{c\ell^2}{4}\dot{\theta} + kl^2\theta + mg\ell\theta &= 0 \\
= 5ml^2\ddot{\theta} + \frac{c\ell^2}{4}\dot{\theta} + kl^2\theta + mg\ell\theta &= 0
\end{aligned}$$

$$\begin{aligned}
\omega_n &= \sqrt{\frac{k_{\text{eq}}}{m_{\text{eq}}}} = \sqrt{\frac{kl^2 + mg\ell}{5ml^2}} \\
&= \sqrt{\frac{400}{5 \times 10}} = 3.162 \text{ rad/s}
\end{aligned}$$


24. Ans: (a)

Sol: $\xi = \frac{c_{\text{eq}}}{2\sqrt{k_{\text{eq}}m_{\text{eq}}}} = \frac{\left(\frac{c\ell^2}{4}\right)}{2\sqrt{(kl^2 + mg\ell) \times 5ml^2}}$

$$\begin{aligned}
&= \frac{400 \times 1^2}{2\sqrt{(400 \times 1^2 + 10 \times 9.81 \times 1) \times 5 \times 10 \times 1^2}} = 0.316
\end{aligned}$$

25. Ans: (a)

Sol:



By moment equilibrium

$$I\ddot{\theta} + Ca^2\dot{\theta} + KL^2\theta + K_\theta\theta = 0$$

$$\frac{mL^2}{3}\ddot{\theta} + Ca^2\dot{\theta} + (KL^2 + K_\theta)\theta = 0$$

$$\omega_n = \sqrt{\frac{K_{\text{eq}}}{m_{\text{eq}}}} = \sqrt{\frac{KL^2 + K_\theta}{mL^2 / 3}}$$

$$\omega_n = \sqrt{\frac{1500}{0.833}} = 42.26 \text{ rad/sec}$$

26. Ans: (c)

Sol: Refer to the above equilibrium equation

$$\begin{aligned}
C_{\text{eq}} &= Ca^2 \\
&= 500 \times 0.4^2 = 80 \frac{\text{N} - \text{m} - \text{sec}}{\text{rad}}
\end{aligned}$$

$$\Rightarrow C = 80 \text{ Nms/rad}$$

Note: For angular co-ordinate

$$\text{Unit of Equivalent inertia} = \frac{\text{N} \cdot \text{m}}{\text{rad/s}^2} = \text{kg} \cdot \text{m}^2$$


$$\text{Unit of equivalent damping coefficient} = \frac{\text{N} \cdot \text{m}}{\text{rad/s}}$$

$$\text{Unit of equivalent stiffness} = \text{N} \cdot \text{m/rad}$$


27. Ans: (a)

Sol: Given length of cantilever beam,

$$l = 1000 \text{ mm} = 1 \text{ m}, \quad m = 20 \text{ kg}$$



Cross section of beam = square

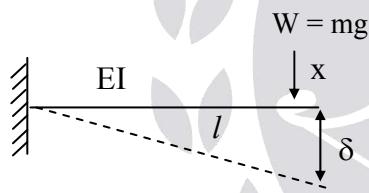

Moment of inertia of the shaft,

$$I = \frac{1}{12} bd^3 = \frac{25 \times (25)^3}{12} = 3.25 \times 10^{-8} \text{ m}^4$$

$$E_{\text{steel}} = 200 \times 10^9 \text{ Pa}$$

$$\text{Mass, } M = 20 \text{ kg}$$

$$\text{Stiffness, } K = \frac{3EI}{\ell^3}$$

Critical damping coefficient,

$$C_C = 2\sqrt{Km} = 1250 \text{ Ns/m}$$

28. Ans: (c)

29. Ans: (d)

$$\text{Sol: } x = 10 \text{ cm at } \frac{\omega}{\omega_n} = 1;$$

$$\xi = 0.1$$

$$\text{At resonance } x = \frac{x_0}{2\xi} = 10 \text{ cm}$$

$$\Rightarrow x_0 = 2 \times 0.1 \times 10 = 2 \text{ cm}$$

x_0 = static deflection

$$\text{At } \frac{\omega}{\omega_n} = 0.5,$$

$$x = \frac{x_0}{\sqrt{1 - \left(\frac{\omega}{\omega_n}\right)^2}^2 + \left[2\xi \frac{\omega}{\omega_n}\right]^2}}$$

$$x = \frac{2}{\sqrt{1 - (0.5)^2}^2 + (2 \times 0.1 \times 0.5)^2} = 2.64 \text{ cm}$$

30. Ans: (a)

$$\text{Sol: } m \ddot{x} + Kx = F \cos \omega t$$

$$m = ?$$

$$K = 3000 \text{ N/m},$$

$$X = 50 \text{ mm} = 0.05 \text{ m}$$

$$F = 100 \text{ N},$$

$$\omega = 100 \text{ rad/sec}$$

$$X = \frac{F}{K - m\omega^2}$$

$$\Rightarrow m = \frac{K}{\omega^2} - \frac{F}{X\omega^2} = 0.1 \text{ kg}$$

31. Ans: (a)

Sol: $\delta = \ln\left(\frac{x_1}{x_2}\right) = \ln 2 = 0.693$

$$\xi = \frac{\delta}{\sqrt{4\pi^2 + \delta^2}}$$

$$= \frac{0.693}{\sqrt{4\pi^2 + 0.693^2}} = 0.109$$

$$c = 2\xi\sqrt{k m} = 2 \times 0.109 \times \sqrt{100 \times 1} \\ = 2.19 \text{ N-sec/m}$$

32. Ans: (b)

Sol: $x_{\text{static}} = 3 \text{ mm}$, $\omega = 20 \text{ rad/sec}$

As $\omega > \omega_n$

So, the phase is 180° .

$$-X = \frac{X_{\text{static}}}{\sqrt{\left(1 - \left(\frac{\omega}{\omega_n}\right)^2\right)^2 + \left(2\xi\frac{\omega}{\omega_n}\right)^2}}$$

$$X = \frac{3}{\sqrt{\left(1 - \left(\frac{20}{10}\right)^2\right)^2 + \left(2 \times 0.109 \times \frac{20}{10}\right)^2}} \\ = 1 \text{ mm opposite to F.}$$

33. Ans: (c)

Sol: At resonance, magnification factor = $\frac{1}{2\xi}$

$$\Rightarrow 20 = \frac{1}{2\xi}$$

$$\Rightarrow \xi = \frac{1}{40} = 0.025$$

34. Ans: (c)

Sol: $M = 100 \text{ kg}$, $m = 20 \text{ kg}$, $e = 0.5 \text{ mm}$

$$K = 85 \text{ kN/m}$$
, $C = 0$ or $\xi = 0$


$$\omega = 20\pi \text{ rad/sec}$$

Dynamic amplitude

$$X = \frac{me\omega^2}{\pm(k - M\omega^2)} = \frac{20 \times 5 \times 10^{-4} \times (20\pi)^2}{\pm(8500 - 100 \times (20\pi)^2)} \\ = 1.27 \times 10^{-4} \text{ m}$$

35. Ans:

Sol:

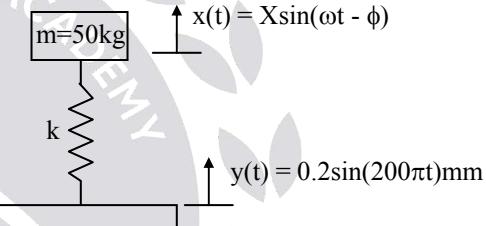

$$\omega = 200\pi \text{ rad/sec}, -X = 0.01 \text{ mm}$$

$$Y = 0.2 \text{ mm}$$

$$\frac{X}{Y} = \frac{k}{k - m\omega^2}$$

$$\Rightarrow \frac{-0.01}{0.2} = \frac{k}{k - 50 \times (200\pi)^2}$$

$$\Rightarrow k = 939.96 \text{ kN/m}$$

36. Ans: (b)

Sol: $m = 5 \text{ kg}$, $c = 20$,

$$k = 80$$
, $F = 8$, $\omega = 4$

$$x = \frac{F}{(k - m\omega^2) + (c\omega)^2}$$

$$= \frac{8}{\sqrt{(80 - 5 \times 4^2) + (20 \times 4)^2}} = 0.1$$

$$\text{Magnification factor} = \frac{x}{x_{\text{static}}}$$

$$x_{\text{static}} = \frac{F}{k} = \frac{8}{80} = 0.1$$

$$\text{Magnification factor} = \frac{0.1}{0.1} = 1$$

37. Ans: (c)

Sol: Given, $m = 250 \text{ kg}$

$$K = 100,000 \text{ N/m}$$

$$N = 3600 \text{ rpm}$$

$$\xi = 0.15$$

$$\omega_n = \sqrt{\frac{K}{m}} = 20 \text{ rad/sec}$$

$$\omega = \frac{2\pi \times N}{60} = 377 \text{ rad/sec}$$

$$TR = \frac{\sqrt{1 + \left(2\xi \frac{\omega}{\omega_n}\right)^2}}{\sqrt{\left(1 - \frac{\omega^2}{\omega_n^2}\right)^2 + \left(2\xi \frac{\omega}{\omega_n}\right)^2}} = 0.0162$$

38. Ans: 10 N.sec/m

Sol: Given systems represented by

$$m\ddot{x} + c\dot{x} + kx = F \cos \omega t$$

$$\text{For which, } X = \frac{F}{\sqrt{(K - m\omega^2)^2 + (C\omega)^2}}$$

$$\text{Given, } K = 6250 \text{ N/m}, m = 10 \text{ kg}, F = 10 \text{ N}$$

$$\omega = 25 \text{ rad/sec}, \quad X = 40 \times 10^{-3}$$

$$\omega_n = \sqrt{\frac{K}{m}} = 25 \text{ rad/sec}$$

$$\omega t = 25t \Rightarrow \omega = 25 \text{ rad/sec}$$

$$\omega = \omega_n \text{ or } K = m\omega_n^2$$

$$\therefore X = \frac{F}{C\omega} \Rightarrow C = \frac{F}{X\omega}$$

$$= \frac{10}{40 \times 10^{-3} \times 25} = 10 \frac{\text{N-sec}}{\text{m}}$$

39. Ans: (b)

Sol: Transmissibility (T) reduces with increase in damping up to the frequency ratio of $\sqrt{2}$. Beyond $\sqrt{2}$, T increases with increase in damping

40. Ans: (c).

Sol: Because $f = 144 \text{ Hz}$ execution frequency.

$$f_{R_n} \text{ (Natural frequency) is } 128.$$

$$\frac{\omega}{\omega_{R_n}} = \frac{f}{f_{R_n}} = \frac{144}{128} = 1.125$$

It is close to 1, which ever sample for which $\frac{\omega}{\omega_n}$ close to 1 will have more response, so sample R will show most perceptible to vibration

41. Ans: (b)

Sol: Given Problem of the type

$$m\ddot{x} + c\dot{x} + kx = F \cos \omega t$$

$$\text{for which, } X = \frac{F}{(k - m\omega^2)^2 + (c\omega)^2}$$

$$\text{or } X = \frac{F/K}{\sqrt{\left(1 - \left(\frac{\omega}{\omega_n}\right)^2\right) + \left(2\xi \frac{\omega}{\omega_n}\right)^2}}$$

Given $F = 10$,

$$\omega_n = 10\omega$$

$$k = 150 \text{ N/m} \quad \text{or} \quad \frac{\omega}{\omega_n} = \frac{1}{10} = 0.1$$

$$\xi = 0.2$$

$$X = \frac{10/150}{\sqrt{(1-0.1)^2 + (2 \times 0.2 \times 0.1)^2}} \\ = 0.0669 \approx 0.07$$

42. Ans: 6767.7 N/m

Sol: Given $f = 60 \text{ Hz}$, $m = 1 \text{ kg}$

$$\omega = 2\pi f = 120\pi \text{ rad/sec}$$

Transmissibility ratio, $TR = 0.05$

Damping is negligible, $C = 0$, $K = ?$

$$\text{We know } TR = \frac{K}{K - m\omega^2} \text{ when } C = 0$$

As TR is less than 1 $\Rightarrow \omega/\omega_n \gg \sqrt{2}$


TR is negative

$$\therefore -0.05 = \frac{K}{K - m\omega^2}$$

Solving we get $K = 6767.7 \text{ N/m}$

43. Ans: (c)

Sol:



Where, $a = \text{acceleration of train}$

$$T \cos \alpha = mg$$

$$T \sin \alpha = ma$$

$$\tan \alpha = \frac{ma}{mg}$$

$$a = g \tan \alpha = 9.81 \tan(9.81^\circ)$$

$$= 1.69 \text{ m/s}^2$$

44. Ans: (a)

45. Ans: (b)

Sol: $e = 2\text{mm} = 2 \times 10^{-3}\text{m}$,

$$\omega_n = 10 \text{ rad/s},$$

$$N = 300 \text{ rpm}$$


$$\omega = \frac{2\pi N}{60} = 10\pi \text{ rad/sec}$$

$$X = \frac{me\omega^2}{k - m\omega^2} = \frac{e\omega^2}{\left(\frac{k}{m}\right)^2 - \omega^2} = \frac{e\omega^2}{\omega_n^2 - \omega^2}$$

$$X = \frac{e \left(\frac{\omega}{\omega_n} \right)^2}{1 - \left(\frac{\omega}{\omega_n} \right)^2} = \frac{2 \times 10^{-3} \times \left(\frac{10\pi}{10} \right)^2}{\pm \left(1 - \left(\frac{10\pi}{10} \right)^2 \right)} \\ = 2.25 \times 10^{-3} \text{ m} = 2.25 \text{ mm}$$

46. Ans: (a)

Sol: Number of nodes observed at a frequency of 1800 rpm is 2



n-mode number

The whirling frequency of shaft,

$$f = \frac{\pi}{2} \times n^2 \sqrt{\frac{gEI}{WL^4}}$$

$$\text{For 1^{st} mode frequency, } f_1 = \frac{\pi}{2} \times \sqrt{\frac{gEI}{WL^4}}$$

$$f_n = n^2 f_1$$

As there are two nodes present in 3rd mode,

$$f_3 = 3^2 f_1 = 1800 \text{ rpm}$$

$$\therefore f_1 = \frac{1800}{9} = 200 \text{ rpm}$$

∴ The first critical speed of the shaft = 200 rpm

47. Ans: (b)

Sol: Critical or whirling speed

$$\omega_c = \omega_n = \sqrt{\frac{K}{m}} = \sqrt{\frac{g}{\delta}} \text{ rad/sec}$$

If N_C is the critical or whirling speed in rpm

$$\text{then } \frac{2\pi N_C}{60} = \sqrt{\frac{g}{\delta}}$$

$$\Rightarrow \frac{2\pi N_C}{60} = \sqrt{\frac{9.81 \text{ m/s}^2}{1.8 \times 10^{-3} \text{ m}}}$$

$$\Rightarrow N_C = 705.32 \text{ rpm} \approx 705 \text{ rpm}$$

