



PRE-GATE-2020

Civil Engineering

(Questions with Detailed Solutions)

*The GA section consists of 10 questions.
Questions 1 to 5 are of 1 mark each, and
Questions 6 to 10 are of 2 marks each.*

Q. 1 – Q. 5 carry one mark each.

01. Fill in the blank with an appropriate phrase
Jobs are hard to _____ these days

- (A) Come by (B) Come down
(C) Come of (D) Come from

01. Ans: (A)

Sol: 'Come by' means to manage to get something.

02. The question below consists of a pair of related words followed by four pairs of words. Select the pair that best expresses the relation in the original pair.

MONKEY : TROOP:

- (A) sheep : hard
(B) elephant : Parliament
(C) bacteria : Colony
(D) wolves : School

02. Ans: (C)

Sol: Troop consists of monkeys just as a colony consists of bacteria.

03. *Choose the most appropriate word from the options given below to complete the following sentence:*

If you had gone to see him, he _____ delighted.

- (A) Would have been (B) Will have been
(C) Had been (D) Would be

03. Ans: (A)

Ans: 'A' conditional tense type 3 grammatical code is

If +had+V3, would +have+V3

04. Which of the following options is closest in meaning to the underlined word?

European intellectuals have long debated the consequences of the hegemony of American popular culture around the world.

- (A) regimen (B) vastness
(C) dominance (D) popularity

04. Ans: (C)

Sol: Dominance means influence or control over another country, a group of people etc.

05. How many one-rupee coins, 50 paise coins 25 paise coins in total of which the numbers are proportional to 5, 7 and 12 are together work ₹115?

- (A) 50, 70, 120 (B) 60, 70, 110
(C) 70, 80, 90 (D) None of these

05. Ans: (A)

Sol: $(5 \times 1 + 7 \times 0.5 + 12 \times 0.25) \times x = 115$

$$(5 + 3.5 + 3) \times x = 115$$

$$11.5x = 115$$

$$x = 10$$

$$\therefore \text{Number of one rupee coin} = 5x = 5 \times 10 = 50$$

$$\text{Number of 5-paise coin} = 7x = 7 \times 10 = 70$$

$$\text{Number of 25-paise coin} = 12x = 12 \times 10 = 120$$



Q. 6 – Q. 10 carry Two marks each.

06. Critical reading is a demanding process. To read critically, you must slow down your reading and, with pencil in hand, perform specific operations on the text mark up the text with your reactions, conclusions, and questions, then you read, become an active participant.

This passage best supports the statement that

- (A) Critical reading is a slow, dull but essential process.
- (B) The best critical reading happens at critical times in a person's life.
- (C) Readers should get in the habit of questioning the truth of what they read.
- (D) Critical reading requires thoughtful and careful attention.

06. Ans: (D)

Sol: Choice (A) is incorrect because the author never says that reading is dull.

Choice (B) and (C) are not support by the paragraph.


Choice (D) is correct as it is implied in the entire passage.

07. Anil's house faces east from the back-side of the house, he walks straight 50 metres, then turns to the right and walks 50m again finally, he turns towards left and stops after walking 25 m Now Anil is in which direction from the starting point?

- (A) South-east
- (B) South-west
- (C) North-east
- (D) North- west

07. Ans: (D)

Sol: The movement of Anil are shown in the adjoining figure



He starts walking from back of his house (i.e) towards west now, the final position is D, which is to the north west of his starting point A.

08. A and B enter into a partnership, A puts in ₹50 and B puts in ₹45. At the end of 4 months, A withdraws half his capital and at the end of 5 months B withdraws $\frac{1}{2}$ of his, C then enters with a capital of ₹70 at the end of 12 months, the profit of concern is ₹254, how can the profit be divided among A, B and C ?

- (A) ₹76, ₹80 and ₹98
- (B) ₹80, ₹76 and ₹98
- (C) ₹76, ₹98 and ₹80
- (D) None of these

08. Ans: (B)

Sol: A's share : B's share : C's share

$$(50 \times 4 + 25 \times 8) : (45 \times 5 + 22.5 \times 7) : (70 \times 7)$$

$$400 : 382.5 : 490$$

$$800 : 765 : 980$$

$$160 : 153 : 196$$

$$\text{Total profit} = ₹254$$



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs

ESE - MAINS

Classes Start from: **13th FEB 2020**



@ DELHI



Students who Qualify in Prelims
can avail **100 % Fee Waiver**



@ HYDERABAD

ESE-2018, 2019 Prelims Qualified Students are also eligible for Fee Discounts



/aceacademy



/ACE_Enggacademy



/aceenggacademy

- H.O. # 4-1-1236/1/A, Sindhu Sadan, King Koti Road, Abids, Hyderabad - 500001, Telangana, India.
- Ph: 040-23234418/19/20 , 040-24750437.
- Email: hyderabad@aceenggacademy.com
- www.aceenggacademy.com



Profit of A

$$= \frac{160}{160+153+196} \times 254 = \frac{160}{509} \times 254 = ₹80$$

$$\text{Profit of B} = \frac{153}{509} \times 254 = ₹76$$

$$\text{Profit of C} = \frac{196}{509} \times 254 = ₹98$$


∴ Hence option 'B' is correct.

09. A sum of ₹25400 was lent out in two parts, one of 12% and the other at $12\frac{1}{2}\%$. If the total annual income is ₹3124.2, the money lent at 12% is ____.

- (A) ₹15240 (B) ₹25400
(C) ₹10160 (D) ₹31242

09. Ans: (C)

Sol: Overall rate of interest $\frac{3124.2}{25400} \times 100 = 12.3\%$



∴ The sum will be divided in the ratio 0.2:0.3 (or) 2:3

∴ The sum lent at 12%

$$= 25400 \times \frac{2}{5} = ₹10160.$$

10. The following question is to be answered on the basis of the table given below.

Category of personnel	Number of staff in the year-1990	Number of staff in the year-1995
Data preparation	18	25
Data control	5	8
Operators	18	32
Programmers	21	26
Analysts	15	31
Managers	3	3
Total	80	135

What is the increase in the sector angle for operators in the year 1995 over the sector angle for operators in the year 1990?

- (A) 4° (B) 3° (C) 2° (D) 1°

10. Ans: (A)

Sol: Sector angle for operators in the year 1990

$$= \frac{18}{80} \times 360^\circ = 81^\circ$$

Sector angle for operator in the year

$$1995 = \frac{32}{135} \times 360^\circ = 85.33 \approx 85^\circ$$

$$\therefore \text{Required difference} = 85^\circ - 81^\circ = 4^\circ$$

Q. 11 – Q. 35 carry one mark each.

11. For the function $f(x, y) = x^2 - y^2$, the point (0, 0) is

- (A) a local minimum
(B) a saddle point
(C) a local maximum
(D) not a stationary point



11. Ans: (B)

Sol: Given $f(x, y) = x^2 - y^2$

$$\Rightarrow f_x = 2x, f_y = -2y \text{ and}$$

$$f_{xx} = 2, f_{xy} = 0, f_{yy} = -2$$

Consider $f_x = 0$ and $f_y = 0$

$$\Rightarrow 2x = 0 \text{ and } -2y = 0$$

$\Rightarrow (0, 0)$ is a stationary point

$$\text{At } (0, 0), f_{xx} f_{yy} - (f_{xy})^2 = -4 < 0$$

$\therefore f(x, y)$ has neither a maximum nor minimum at $(0, 0)$.

12. A continuous random variable X has a probability density function

$$f(x) = e^{-x}, 0 < x < \infty. \text{ Then } P(X > 2) \text{ is}$$

$$(A) 0.1353$$

$$(B) 0.2354$$

$$(C) 0.2343$$

$$(D) 1.1353$$

12. Ans: (A)

$$\begin{aligned} \text{Sol: } P(X > 2) &= \int_2^{\infty} f(x) \cdot dx \\ &= \int_2^{\infty} e^{-x} dx \\ &= \left. \frac{e^{-x}}{-1} \right|_2^{\infty} \\ &= e^{-2} = 0.1353 \end{aligned}$$

13. The solution to $x^2 y^{11} + xy^1 - y = 0$ is

$$(A) y = C_1 x^2 + C_2 x^{-3} \quad (B) y = C_1 + C_2 x^{-2}$$

$$(C) y = C_1 x + \frac{C_2}{x} \quad (D) y = C_1 x + C_2 x^4$$

13. Ans: (C)

Sol: Put $\ln x = t$ so that $x = e^t$ and

$$\text{let } x \frac{dy}{dx} = Dy, \quad x^2 \frac{d^2 y}{dx^2} = D(D-1)y$$

$$\text{where } D = \frac{d}{dt}$$

Given differential equation is

$$x^2 y^{11} + xy^1 - y = 0$$

$$\Rightarrow D(D-1)y + Dy - y = 0$$

$$\Rightarrow (D^2 - 1)y = 0$$

Consider Auxiliary equation $f(D) = 0$

$$\Rightarrow D^2 - 1 = 0$$

$\Rightarrow D = 1, -1$ are different real roots

\therefore The general solution of given equation is

$$\begin{aligned} y &= c_1 e^t + c_2 e^{-t} \\ &= c_1 x + \frac{c_2}{x} \end{aligned}$$

14. A numerical solution of the equation

$$f(x) = x + \sqrt{x} - 3 = 0 \text{ can be obtained using}$$

Newton – Raphson method. If the starting

value is $x = 2$ for the iteration then the value of x that is to be used in the next step is

$$(A) 1.306$$

$$(B) 2.739$$

$$(C) 1.694$$

$$(D) 2.306$$

14. Ans: (C)

Sol: Given $f(x) = x + \sqrt{x} - 3 = 0$ and $x_0 = 2$

$$f'(x) = 1 + \frac{1}{2\sqrt{x}}$$

Newton – Raphson formula is

$$x_{n+1} = x_n - \frac{f(x_n)}{f'(x_n)}$$

$$\Rightarrow x_1 = x_0 - \frac{f(x_0)}{f'(x_0)}$$

$$= 2 - \frac{(2 + \sqrt{2} - 3)}{\left(1 + \frac{1}{2\sqrt{2}}\right)} = 1.6939$$

$$x_1 = 1.6939$$



15. Which of the following statements are correct?

- P. Modulus of sub-grade reaction can be estimated by CBR test
Q. Emulsion is used for wet and cold climatic conditions
R. Los Angeles test is a hardness cum impact test on aggregates.

- (A) P and Q (B) P and R
(C) Q and R (D) P, Q and R


15. Ans: (C)

16. A cantilever of length l carries two concentrated loads each of magnitude P placed at distances $l/2$ and l from the fixed end. The strain energy stored by the cantilever is

- (A) $\left(\frac{13P^2\ell^3}{24EI}\right)$ (B) $\left(\frac{P^2\ell^3}{8EI}\right)$
(C) $\left(\frac{7P^2\ell^3}{24EI}\right)$ (D) $\left(\frac{P^2\ell^3}{12EI}\right)$

16. Ans: (C)

Sol:

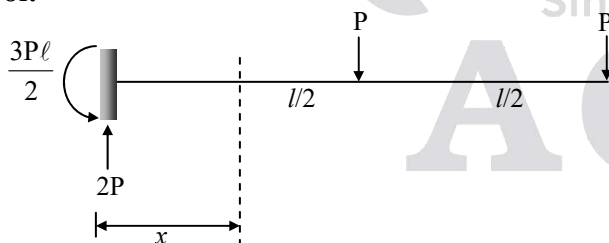


$$M_x = 2Px - \frac{3P\ell}{2}$$

$$U = \int_0^\ell \frac{M_x^2}{2EI} dx = \int_0^\ell \left(\frac{4Px - 3P\ell}{2EI} \right)^2 dx$$

$$\begin{aligned} &= \frac{1}{8EI} \int_0^\ell (16P^2x^2 + 9P^2\ell^2 - 24P^2x\ell) dx \\ &= \frac{1}{8EI} \times \left[\frac{16P^2x^3}{3} + 9P^2\ell^2 \cdot x - \frac{24P^2\ell \cdot x^2}{2} \right]_0^\ell \\ &= \frac{1}{8EI} \times \left[\frac{16P^2\ell^3}{3} + 9P^2\ell^3 - 12P^2\ell^3 \right] \\ &= \frac{P^2\ell^3}{8EI} \times \left[\frac{16 + 27 - 36}{3} \right] \\ &= \frac{7P^2\ell^3}{24EI} \end{aligned}$$


17. A cantilever beam is subjected to the loads as shown in figure. The deflection under the point load is _____.



- (A) $\frac{5PL^3}{6EI}$ (B) $\frac{3PL^3}{8EI}$
(C) $\frac{6PL^3}{32EI}$ (D) $\frac{PL^3}{3EI}$

17. Ans: (A)

Sol:



Deflection under point load

$$= \frac{PL^3}{3EI} + \frac{ML}{EI} \left(\frac{L}{2} \right)$$

$$= \frac{PL^3}{3EI} + \frac{(PL)L^2}{2EI} = \frac{PL^3}{EI} \left(\frac{1}{3} + \frac{1}{2} \right) = \frac{5PL^3}{6EI}$$



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs



ALL INDIA
1st RANKS IN GATE




ALL INDIA
1st RANKS IN ESE

Hyderabad | Ahmedabad | Pune | Delhi | Bhubaneswar | Bangalore | Chennai | Lucknow | Visakhapatnam | Vijayawada | Tirupati | Kolkata

Head Office Address: # 4-1-1236/1/A, Sindhu Sadan, King Koti, Abids, Hyderabad – 500001, Telangana, India.



SUMMER

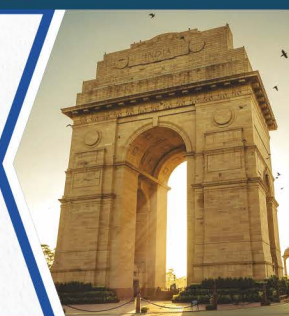

SHORT TERM BATCHES GATE + PSUs - 2021

@ HYDERABAD

Streams: EC, EE, ME, CE, CSIT, IN & PI

28th April, 5th May,
10th May, 17th May, 25th May,
1st June, 8th June, 2020

Course Duration: 55 to 60 Days

📞 040-23234418/19/20, 040-24750437

✉️ hyderabad@aceenggacademy.com

@ DELHI

Streams: EC, EE, ME, CE, IN & PI

10th & 20th
May 2020

Course Duration: 60 to 70 Days

📞 7838971777 (Call or Whatsapp)

✉️ delhi@aceenggacademy.com

Early Bird Offer Rs. 3,000/- Register before 31st March 2020

Upcoming Batches @ HYDERABAD

GATE+PSUs-2021

Spark Batches : 10th May, 8th & 23rd June 2020.

Regular Batches : 26th April, 10th, 24th May, 8th, 23rd June, 7th, 22nd July,
5th & 20th August 2020.

ESE+GATE+PSUs-2021

Spark Batches : 10th May, 8th & 23rd June 2020.

Regular Batches : 29th March, 26th April, 10th, 24th May,
8th, 23rd June & 7th July 2020.

Upcoming Batches @ DELHI

GATE+PSUs-2021

Weekend Batches : 28th Dec, 11th Jan & 8th Feb 2020.

Regular Batches : 17th Feb, 7th March, 10th & 20th May 2020.

ESE+GATE+PSUs-2021

Weekend Batches : 28th Dec, 11th Jan & 8th Feb 2020.

Regular Batches : 17th Feb, 7th March, 10th & 20th May 2020.

GATE+PSUs-2022

Weekend Batches : 28th Dec, 11th Jan & 8th Feb 2020.

ESE+GATE+PSUs-2022

Weekend Batches : 28th Dec, 11th Jan & 8th Feb 2020.

SSC-JE Batches @ Hyderabad

New Batch Starts from: 10th May 2020

for Civil, Mechanical & Electrical



Scan QR Code for
Upcoming Batches
Details

🌐 www.aceenggacademy.com

follow us on:





18. A 300 mm diameter well penetrates fully a confined aquifer of thickness 30 m. When the well is pumped at a rate of 900 litres/min, the steady state draw downs in the two observation wells located at 10 m and 75 m radial distance from the pumping well are found to be 2.8 m and 1.2 m respectively. The coefficient of transmissibility would be ____ m²/day.

- (A) 180.38 (B) 112.81
(C) 259.75 (D) 78.34

18. Ans: (C)

Sol: $Q = 900$ l/min, $B = 30$ m, $d_w = 300$ mm

$r_1 = 10$ m $\rightarrow S_1 = 2.8$ m, $r_2 = 75$ m $\rightarrow S_2 = 1.2$ m

$T = ?$ m²/day

$$Q = \frac{2\pi T(S_1 - S_2)}{\ln\left(\frac{r_2}{r_1}\right)}$$

$$\frac{900 \times 10^{-3}}{\left(\frac{1}{24} \times \frac{1}{60}\right)} = \frac{2 \times \pi \times T(2.8 - 1.2)}{\ln\left(\frac{75}{10}\right)}$$

$T = 259.75$ m²/day

$Q = 900$ μ min used then answer will be 180.38 conversion required

If log is used answer will be 112.809

19. A well with a radius of 0.5 m completely penetrates in an unconfined aquifer of thickness 50 m and $K = 9.772$ m/day. The water level in the well remains at 40 m up on pumping. Assuming that pumping has essentially no effect on water at $R = 500$ m, what is the steady stage discharge ?

- (A) 4886 m³/day (B) 4000 m³/day
(C) 5333.07 m³/day (D) 241.857 m³/day

19. Ans: (B)

Sol:

$$Q = \frac{\pi K[H_2^2 - H_1^2]}{\ln\left[\frac{r_2}{r_1}\right]} = \frac{\pi K[H^2 - h^2]}{\ln\left[\frac{R}{r_w}\right]} = \frac{\pi \times 9.772[50^2 - 40^2]}{\ln\left[\frac{500}{0.5}\right]}$$

$$3999.8 \approx 4000 \text{ m}^3/\text{day}$$

20. Criteria for satisfactory performance of footings are

1. Soil supporting the footing must be safe against shear failure
2. Footing must be rigid
3. Footing must not settle beyond permissible value
4. Footing should be above water table

Which of the following statements are correct?

- (A) 3 and 4 only (B) 1 and 2 only
(C) 1 and 3 only (D) 2 and 4 only

20. Ans: (C)

Sol: For satisfactory performance, footing need not be rigid, it can be flexible too and water table can be anywhere

21. Correction for fines in standard penetration test is given by

- (A) $N'' = 15 + \frac{1}{2} (N' + 15)$
(B) $N'' = 15 + \frac{1}{2} (N' - 15)$
(C) $N'' = 50 + \frac{1}{2} (N' - 15)$
(D) $N'' = 50 + \frac{1}{2} (N' + 15)$

21. Ans: (B)



22. The Design criteria for an Inverted filter to prevent piping failure due to upward seepage as given by Terzaghi is

- (A) $\frac{D_{15} \text{ of filter}}{D_{85} \text{ of foundation}} < 4 \text{ to } 5 < \frac{D_{10} \text{ of filter}}{D_{15} \text{ of foundation}}$
 (B) $\frac{D_{85} \text{ of foundation}}{D_{15} \text{ of filter}} < 4 \text{ to } 5 < \frac{D_{15} \text{ of filter}}{D_{15} \text{ of foundation}}$
 (C) $\frac{D_{15} \text{ of filter}}{D_{85} \text{ of foundation}} < 20 \text{ to } 25 < \frac{D_{15} \text{ of filter}}{D_{15} \text{ of foundation}}$
 (D) $\frac{D_{15} \text{ of filter}}{D_{85} \text{ of foundation}} < 4 \text{ to } 5 < \frac{D_{15} \text{ of filter}}{D_{15} \text{ of foundation}}$

22. Ans: (D)

23. In PERT analysis the time estimate of activities correspond to

- (A) Normal distribution
 (B) Poisson's distribution
 (C) β -distribution
 (D) Binomial distribution

23. Ans: (C)

Sol: In PERT, for an activity β -distribution is used but for entire project normal distribution is used.

24. If $\tau = \left(\frac{du}{dy}\right)^3$ and $\vec{V} = y^2 \hat{i}$, then the apparent viscosity is

- (A) $2y$ (B) $2y^2$
 (C) 0 (D) $4y^2$

24. Ans: (D)

Sol: Given that $\tau = \left(\frac{du}{dy}\right)^3$ and $u = y^2$

$$\tau = \left(\frac{du}{dy}\right)^2 \times \left(\frac{du}{dy}\right)$$

$$= \mu_{app} \times \left(\frac{du}{dy}\right)$$

$$\text{Where } \mu_{app} = \left(\frac{du}{dy}\right)^2 = \left[\frac{d}{dy}(y^2)\right]^2 = [2y]^2 = 4y^2$$

25. A hydraulic turbine operates at the following parameters at its best efficiency point: speed = 90 rpm, discharge = 200 m³/s, net head = 55 m and brake power = 100 MW. The dimensionless specific speed in radians of this turbine is

- (A) 190 (B) 1.13
 (C) 3.17 (D) 36.24

25. Ans: (B)

Sol: Given data:

$N = 90 \text{ rpm}$, $Q = 200 \text{ m}^3/\text{s}$, $H = 55 \text{ m}$ and $P = 100 \text{ MW}$

The dimensionless specific speed of a turbine is given as:

$$N_s^* = \frac{\omega \sqrt{P/\rho}}{(gH)^{5/4}}$$

where, ω = speed in rad/s

P = Power in Watt

$$\begin{aligned} \text{Thus, } N_s^* &= \frac{2\pi \times \frac{90}{60} \sqrt{\frac{100 \times 10^6}{10^3}}}{(9.81 \times 55)^{5/4}} \\ &= 0.36 \pi \\ &= 1.13 \end{aligned}$$



26. Find carbonaceous and non-carbonaceous hardness in mg/l as CaCO_3 from the following ionic substances found in water

Ca = 4 m eq/lit; Mg = 2 m eq/lit;
 $\text{CO}_3 = 1$ m eq/lit; $\text{HCO}_3 = 2$ m eq/lit
 (A) 150 & 300 (B) 150 & 200
 (C) 150 & 150 (D) 150 & 100

26. Ans: (C)

Sol: TH = Ca \times 50 + Mg \times 50

$$= 4 \times 50 + 2 \times 50 \\ = 300 \text{ mg/l as } \text{CaCO}_3$$

$$\text{TA} = \text{CO}_3 \times 50 + \text{HCO}_3 \times 50$$

$$= 1 \times 50 + 2 \times 50 \\ = 150 \text{ mg/l as } \text{CaCO}_3$$

$$\therefore \text{TH} > \text{TA}$$

$$\text{CH} = \text{TA} = 150 \text{ mg/l as } \text{CaCO}_3$$

$$\text{NCH} = \text{TH} - \text{CH}$$

$$= 300 - 150 \\ = 150 \text{ mg/l as } \text{CaCO}_3$$

27. A smoke parcel of temperature 40°C released from a industrial stack would rise vertically above ground. If ELR is $-0.5^\circ\text{C}/100$ m and atmospheric temperature on the top of the stack is 39°C

(A) 10 m (B) 50 m
 (C) 100 m (D) 200 m

27. Ans: (D)


Sol: Till temperature of smoke parcel is equal to the temperature of ambient atmosphere, smoke parcel will rise.

$$40 - \frac{1}{100} \times x = 39 - \frac{0.5}{100} \times x$$

$$(40 - \text{ALR}) = (39 - \text{ELR})$$

$$x = 200 \text{ m}$$


28. In the figure shown below, the value of coefficient of dynamic friction between 500 N block and incline is _____ (Assume $g = 10 \text{ m/sec}^2$)

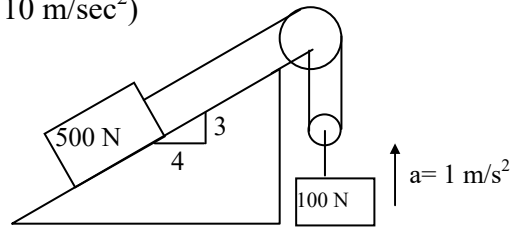

28. Ans: 0.36

Range 0.35 – 0.38

Sol:

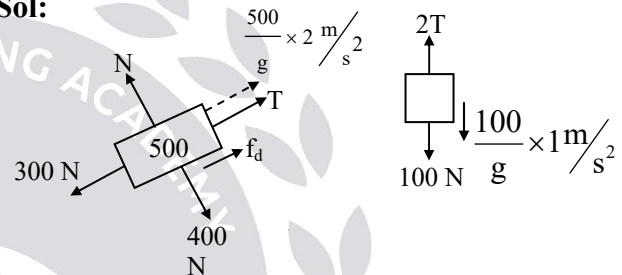

$$T = \frac{100 + 10}{2}$$

$$T = 55 \text{ N}$$

$$f_d = 300 - (100 + 55)$$

$$f_d = 145 \text{ N}$$

$$f_d = \mu_d N$$

$$145 = \mu_d (400)$$

$$\mu_d = 0.3625$$

29. If directional derivative of $\phi = 2xz - y^2$, at the point (1, 3, 2) becomes maximum in the direction of \vec{a} , then magnitude of \vec{a} is

29. Ans: 7.48

Range: 7.4 to 7.5

$$\text{Given } \phi = 2xz - y^2$$

$$\nabla \phi = \frac{\partial \phi}{\partial x} \vec{i} + \frac{\partial \phi}{\partial y} \vec{j} + \frac{\partial \phi}{\partial z} \vec{k}$$



$$= 2z\bar{i} - 2y\bar{j} + 2x\bar{k}$$

∴ Required direction vector

$$= \bar{a} = (\nabla\phi) \text{ at } (1, 3, 2) = (4\bar{i} - 6\bar{j} + 2\bar{k})$$

$$\begin{aligned} \text{Magnitude of } \bar{a} &= \sqrt{16 + 36 + 4} \\ &= \sqrt{56} = 7.48 \end{aligned}$$

30. A circular area carries an uniformly load of 15 t/m^2 with a radius of 4 m. The intensity of vertical stress at a point 5 m below the centre of circular area will be _____ (in t/m^2) (Rounded upto two decimal places)

30. **Ans: 7.86** **Range: 7.80 – 7.90**

$$q = 15 \text{ t/m}^2$$

$$r = 4 \text{ m}$$

$$z = 5 \text{ m}$$

For circular loaded area :

$$\begin{aligned} \sigma_z &= q \left\{ 1 - \left[\frac{1}{1 + \left(\frac{r}{z} \right)^2} \right]^{3/2} \right\} \\ &= 15 \left\{ 1 - \left[\frac{1}{1 + \left(\frac{4}{5} \right)^2} \right]^{3/2} \right\} \end{aligned}$$

$$\therefore \sigma_z = 7.857 \approx 7.86 \text{ t/m}^2$$

31. During chain survey, sloping ground makes an angle of 60° with horizontal with 30 m chain, the hypotneusal allowance (in m) is _____.

31. **Ans: 30 m** **Range: 29.5 to 30.5**

$$\begin{aligned} \text{Sol: } \therefore \text{Hypotneusal allowance} &= L (\sec\theta - 1) \\ &= 30 (\sec 60^\circ - 1) \\ &= 30 \text{ m} \end{aligned}$$

32. A RC canopy has an effective span is 6 m. Width of flange is 1000 mm, width of rib is 300 mm and thickness of slab is 100 mm. The beam is monolithically cast with their columns at the ends. The effective width of flange (in m, up to two decimals places) as per IS:456-2000 is (in m) _____.

32. **Ans: 0.56** **Range: 0.50 to 0.60**

RC Canopy is treated as an Isolated L beam

Since it is monolithically constructed, will be options of data the l_o value taken as 0.7 times the effective span

Effective width of flange

$$b_f = \frac{0.5 \times l_o}{\frac{l_o}{b} + 4} + b_w \not> b$$

(b = width of the flange, b_w = Width of web)

$$\begin{aligned} &= \frac{0.5 \times 0.7 \times 6}{\frac{0.7 \times 6}{1} + 4} + 0.3 \\ &= 0.56 \text{ m} < b \quad \therefore \text{O.K} \end{aligned}$$

33. A mechanical mixing device imparts a power of 1960 watts to water in a rapid mixing tank of size 4 m^3 induce a velocity gradient of _____ S^{-1} . If dynamic viscosity of water is $1 \times 10^{-3} \text{ N-sec/m}^2$.

33. **Ans: 700** **Range: No Range**

Power $P = 1960 \text{ watts}$

Volume $V = 4 \text{ m}^3$

$$\mu = 1 \times 10^{-3} \text{ N sec/m}^2$$

$$\begin{aligned} \text{Velocity gradient } G &= \sqrt{\frac{P}{v\mu}} = \sqrt{\frac{1960}{4 \times 1 \times 10^{-3}}} \\ &= 700 \text{ s}^{-1} \end{aligned}$$



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs



Hyderabad | Ahmedabad | Kothapet | Kukatpally | Delhi | Pune | Bhubaneswar | Lucknow | Bengaluru | Chennai | Vijayawada | Vizag | Tirupathi | Kolkata

ESE / GATE / PSUs LONG TERM PROGRAM @ HYDERABAD

Batches Start From




19th JAN 2020



25th FEB 2020

Streams Offered : EC | EE | ME | CE | CSIT | IN & PI

MORNING BATCHES

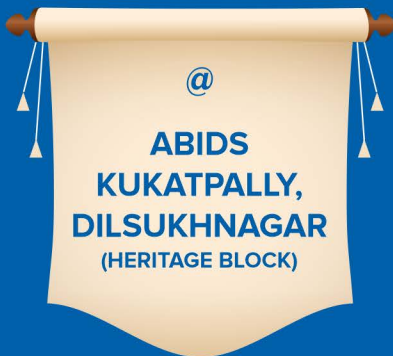

EVENING BATCHES



WEEKEND BATCHES



COURSES OFFERED:

- Classroom Coaching
- Postal Coaching
- Online Test Series
- Interview Guidance
- Digital Classes

New Batches for

ESE + GATE + PSUs - 2022

GATE + PSUs - 2022

Starts from:

19th JAN 2020

25th FEB 2020

New Batches for

ESE + GATE + PSUs - 2021

Morning Batches @ Abids

28th DEC & 19th JAN 2020



Scan **QR CODE** for
New Batch Details

Hearty Congratulations to our **ESE 2019 Top Rankers**



our **GATE-2019 Rankers**



ABIDS

☎ 040-23234418,19,20, 040-24750437

KUKATPALLY

☎ 040-40199966, 93476 99966

DILSUKHNAGAR

☎ 040-40209345, 040-40044451


www.aceenggacademy.com

follow us on:






34. The fixed end moment at 'A' for the beam shown below is (in kN-m) _____. (up to two decimal place)

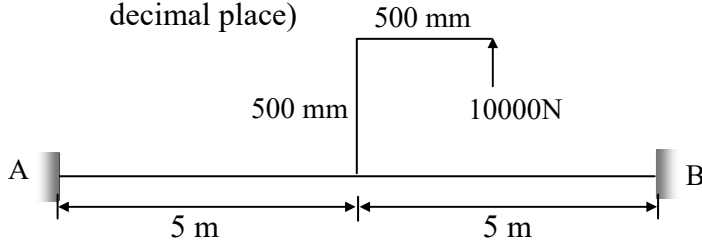


34. Ans: 11.25 kN-m Range: No Range

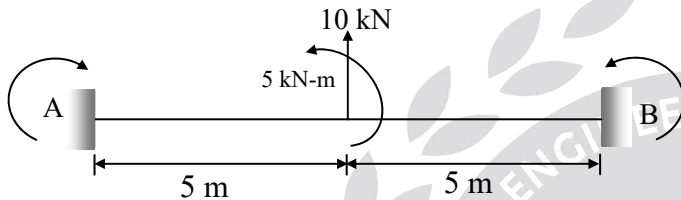

$$\begin{aligned} @ A &= -\frac{M}{4} + \frac{wl}{8} \\ &= -\frac{5}{4} + \frac{10 \times 10}{8} \\ &= 11.25 \text{ kN-m} \end{aligned}$$

35. The change in length of bar subjected to axial force of (30π) kN is _____ mm ($E = 200$ GPa)

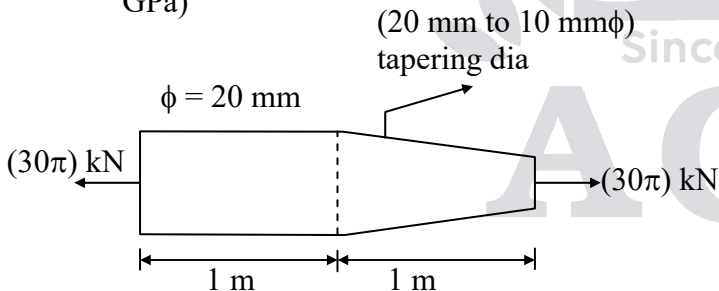

35. Ans: 4.5 mm Range: No Range

$$\text{Sol: } \delta \ell = \delta \ell_{(1)} + \delta \ell_{(2)}$$

$$\begin{aligned} &= \frac{[(30\pi) \times 10^3][1000]}{\frac{\pi}{4}(20^2)(200 \times 10^3)} + \frac{[30\pi \times 10^3][1000]}{\frac{\pi}{4}(20 \times 10)(200 \times 10^3)} \\ &= 4.5 \text{ mm} \end{aligned}$$

$$= \frac{4 \times 30 \times 1000}{(20^2)(200)} + \frac{4 \times 30 \times 1000}{(20 \times 10)(200)} = 1.5 + 3 = 4.5 \text{ mm}$$

Q. 36 – Q. 65 carry Two marks each.

36. Given matrix $[A] = \begin{bmatrix} 4 & 2 & 1 & 3 \\ 6 & 3 & 4 & 7 \\ 2 & 1 & 0 & 1 \end{bmatrix}$, then the

system $AX = O$, where $X = \begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{bmatrix}$ has

- (A) no solution
(B) a unique solution
(C) only one independent solution
(D) two linearly independent solutions

36. Ans: (D)

Sol: Given $A = \begin{bmatrix} 4 & 2 & 1 & 3 \\ 6 & 3 & 4 & 7 \\ 2 & 1 & 0 & 1 \end{bmatrix}$

$$R_2 \rightarrow 4R_2 - 6R_1;$$

$$R_3 \rightarrow 2R_3 - R_1$$

$$\sim \begin{bmatrix} 4 & 2 & 1 & 3 \\ 0 & 0 & 10 & 10 \\ 0 & 0 & -1 & -1 \end{bmatrix}$$

$$R_3 \rightarrow (10)R_3 + R_2$$

$$\sim \begin{bmatrix} 4 & 2 & 1 & 3 \\ 0 & 0 & 10 & 10 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$\therefore \rho(A) = 2$$

$$\begin{aligned} \therefore \text{Number of linearly independent solutions} \\ &= \text{Number of variables} - \text{Rank of } A \\ &= 4 - 2 = 2 \end{aligned}$$



37. The annual precipitation data of a city is normally distributed with mean and standard deviation as 1000 mm and 200 mm, respectively. The probability that the annual precipitation will be more than 1200 mm is
(A) 0.1587 (B) 0.3174
(C) 0.3456 (D) 0.2345

37. Ans: (A)

Sol: Let X = annual precipitation

We know area under normal curve in the interval $(\mu - \sigma, \mu + \sigma) = 0.6826$

where μ is mean and σ is standard deviation

$$\Rightarrow P(800 < X < 1200) = 0.6826$$

Required probability = $P(X > 1200)$

$$= \frac{1 - 0.6826}{2} = 0.1587$$

38. The normal flows on two approach roads at an intersection are respectively 500 pcu/hr, and 300 pcu/hr. The corresponding saturation flow is 1600 pcu/hr, on each road. The lost time per signal cycle is 16 sec. The optimum cycle time as per Webster is _____ sec.
(A) 72.5 sec (B) 58 sec
(C) 48 sec (D) 19.3 sec

38. Ans: (B)

Sol: Webster's optimum cycle time,

$$C_o = \frac{1.5L + 5}{1 - y}$$

Two phase signal $y = y_1 + y_2$

$$= \frac{500}{1600} + \frac{300}{1600} = 0.5$$

Lost time per cycle $L = 16$ sec

$$\therefore C_o = \frac{1.5 \times 16 + 5}{1 - 0.5} = \frac{29}{0.5} = 58 \text{ sec}$$

39. What will be non-passing sight distance on a highway for a design speed of 100 kmph when its ascending gradient is 2%? Use coefficient of longitudinal friction as 0.7 and lateral coefficient of friction as 0.15. The brake efficiency is 0.5. Perception reaction time of driver is 2.5 sec.

- (A) 176 m (B) 200 m
(C) 185 m (D) 150 m

39. Ans: (A)

Sol: Design speed, $v = 27.77$ m/s

$$\begin{aligned} SSD &= vt + \frac{v^2}{2g(\eta f + G)} \\ &= 27.77 \times 2.5 + \frac{27.77^2}{2 \times 9.81(0.5 \times 0.7 + 0.02)} \\ &= 69.425 + 771.17 / 7.2594 = 175.65 \text{ m} \end{aligned}$$

40. Which of the following statements is corresponding to temperature stresses on a rigid pavement.

P. During mid day the warping stress is compressive on the top face of the rigid pavement

Q. During peak winter pavement will be under compression due to frictional stress

R. Warping stress is zero at the corner of the pavement during mid night.

- (A) P, Q and R (B) P only
(C) P and Q (D) Q and R

40. Ans: (B)

41. The plastic moment capacity for the column shown in the figure is M_p . The value of P at collapse is:


- (A) $\frac{5M_p}{2\ell}$
(B) $\frac{3M_p}{\ell}$
(C) $\frac{13M_p}{6\ell}$
(D) $\frac{12M_p}{7\ell}$

41. Ans: (C)

Sol: $r = 4$; $D_s = (r - 2) = 2$; $NOP = D_s + 1 = 3$

There are 3 possible alternate mechanisms as shown below:

ALT - I

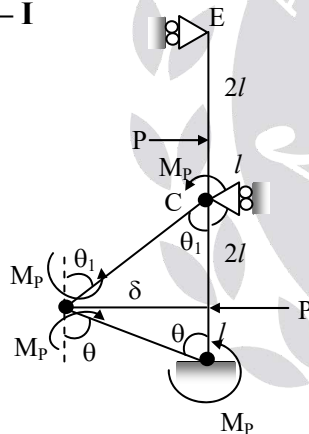


$$P_C \times \delta = M_p \theta + M_p \theta + M_p \theta_1 + M_p \theta_1$$

$$P_C \times l \times \theta = 2 M_p \theta + M_p \frac{\theta}{2} \times 2$$

$$P_C = \frac{3M_p}{\ell}$$

ALT - II

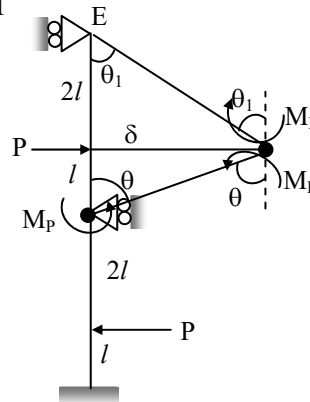


$$P_C \times \delta = M_p \theta + M_p \theta + M_p \theta_1$$

$$P_C \times l \times \theta = 2 M_p \theta + M_p \frac{\theta}{2}$$

$$P_C = \frac{5M_p}{2\ell}$$

ALT - III

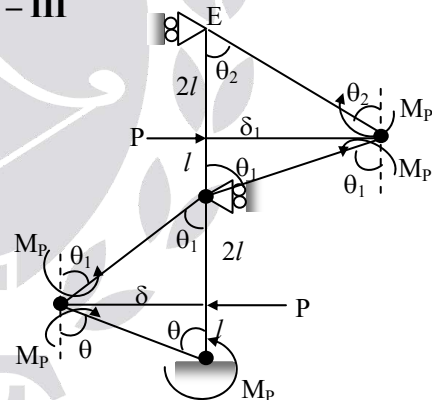

$$\delta = l \theta = 2 l \theta_1$$

$$\theta_1 = \frac{\theta}{2}$$

$$\delta_1 = l \times \theta_1 = \frac{l\theta}{2} = 2\ell\theta_2$$

$$\theta_2 = \frac{\theta}{4}$$

$$P_C \times \delta + P_C \times \delta_1$$

$$= M_p \theta + M_p \theta + M_p \theta_1 + M_p \theta_1 + M_p \theta_2$$



$$P_C \times \ell \theta + P_C \times \frac{\ell \theta}{2} = 2M_P \theta + 2M_P \frac{\theta}{2} + M_P \frac{\theta}{4}$$

$$P_C = \frac{13M_P}{6\ell}$$

Design collapse load P_C as per upper bound theorem = minimum value obtained from various alternatives = $\frac{13M_P}{6\ell}$

42. A cylindrical rod of diameter 10 mm and 1.0 m length is fixed at one end. The other end is twisted by an angle of 10° by applying a torque. The maximum shear strain in the rod is ____.

- (A) 4.32×10^{-6} radians
(B) 8.72×10^{-4} radians
(C) 1.74×10^{-3} radians
(D) 2.36×10^{-3} radians

42. Ans: (B)

Sol: $\frac{\tau}{r} = \frac{G\theta}{\ell}$

Shear strain, $\phi = \frac{\tau}{G} = \frac{\theta \cdot r}{\ell}$

$$= \frac{\left(10 \times \frac{\pi}{180}\right)(5)}{1000} = 8.72 \times 10^{-4} \text{ radian}$$

43. A wide rectangular channel has a Manning's co-efficient of 0.015 carries a discharge of $2 \text{ m}^3/\text{s}/\text{m}$. The possible types of gradually varied flow (GVF) produced in following break in the grade of channel.

$S_{01} = 0.0008$ and $S_{02} = 0.016$ respectively are

- (A) M_2 only (B) S_2 only
(C) M_2, S_2 (D) M_3, S_1

43. Ans: (C)

Sol: Given : $q = 2 \text{ m}^3/\text{s}/\text{m}$

$$n = 0.015$$

$$S_{01} = 0.0008$$

$$S_{02} = 0.016$$

$$\therefore \text{Critical depth, } y_c = \left(\frac{q^2}{g}\right)^{1/2}$$

$$y_c = \left(\frac{2^2}{9.81}\right)^{1/3} = 0.74 \text{ m}$$

Normal depth, y_n : for wide rectangle

$$(P = y, R = y)$$

$$Q = \frac{1}{n} \cdot A \cdot R^{2/3} \cdot S^{1/2}$$

$$Q = \frac{1}{n} \cdot B y_n \cdot y_n^{2/3} \cdot S_o^{1/2}$$

$$\therefore y_n^{5/3} = \frac{q \cdot n}{\sqrt{S_o}}$$


$$S_{01} = 0.0008 \Rightarrow y_{n1} = \left(\frac{2 \times 0.015}{\sqrt{0.0008}}\right)^{3/5} = 1.036 \text{ m}$$

$$S_{02} = 0.016 \Rightarrow y_{n2} = \left(\frac{2 \times 0.015}{\sqrt{0.016}}\right)^{3/5} = 0.42 \text{ m}$$

$$y_{n1} > y_c \Rightarrow \text{mild}$$

$$y_{n2} < y_n \Rightarrow \text{steep}$$

Mild slope followed by steep slope

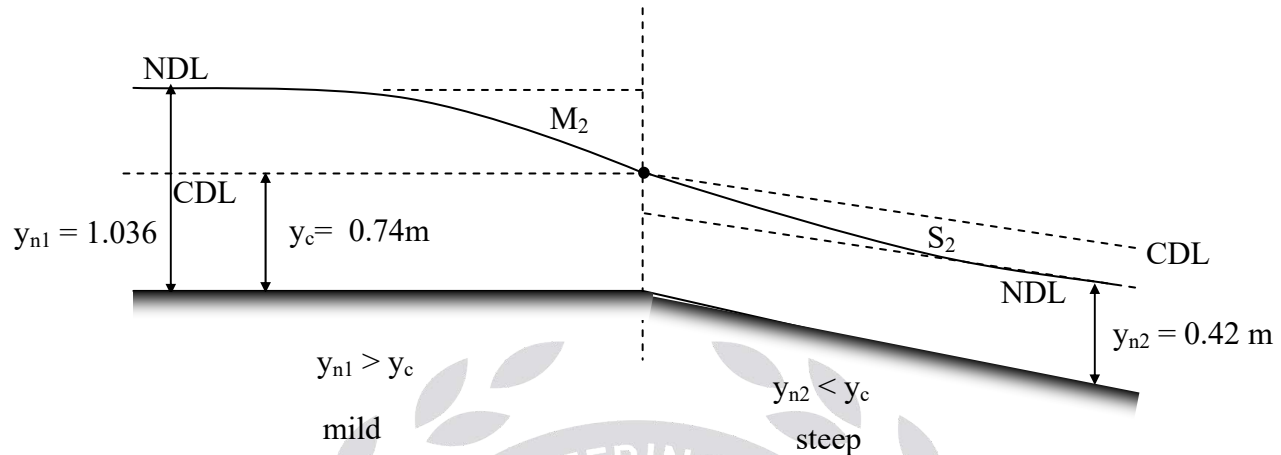

Resulting water surface profiles are M_2 curve on mild slope & S_2 curve on steep slope.

44. Match the following List-I to List-II Based on observation made from Atterberg limit test

Liquid limit, $w_L = 60\%$

Plastic limit, $w_p = 40\%$

Shrinkage limit, $w_s = 15\%$

Natural moisture content, $w = 30\%$

List-I

P. Consistency Index I_c

Q. Plasticity Index, I_p

R. Liquidity Index, I_L

S. Shrinkage Index, I_s

List-II

1. 25%

2. - 0.5

3. 1.5

4. 20%

Codes:

	P	Q	R	S
(A)	2	4	3	1
(B)	2	1	3	4
(C)	3	4	2	1
(D)	3	1	2	4

44. **Ans: (C)**

Sol: Plasticity index, $I_p = w_L - w_p$

$$= 60 - 40 = 20\%$$

Shrinkage index, $I_s = w_p - w_s$

$$= 40 - 15\% = 25\%$$

Consistency Index,

$$I_c = \frac{w_L - w}{I_p} = \frac{60 - 30}{20} = 1.5$$

$$I_c + I_L = 1 \Rightarrow I_L = -0.5$$

45. Following observations were noted in a field unconfined compression test on clay sample.

Initial length = 12 cm

Diameter of sample = 4 cm

Extension of spring = 2.5 cm

Spring constant = 10.5 kg/cm

Change in length of sample = 2.35 cm

If the clay sample failed at an angle of 50° with respect to horizontal, the unconfined compressive strength of soil is

(A) 1.41 kg/cm²

(B) 0.705 kg/cm²

(C) 1.68 kg/cm²

(D) 0.88 kg/cm²

45. **Ans: (C)**

Sol: $d = 4$ cm, $l = 12$ cm, $\delta l = 2.35$ cm

Unconfined compression test: ($\sigma_c = \sigma_3 = 0$)



$$\sigma_1 = q_u$$

$$\therefore q_u = 2C_u \tan \alpha_f$$


$$\therefore q_u = \frac{Q_f}{A_f}$$

$$\begin{aligned} Q_f &= \text{Spring constant} \times \text{Extension of spring} \\ &= 10.5 \times 2.5 = 26.25 \text{ kg} \end{aligned}$$

$$A_f = \frac{A}{1-\varepsilon} = \frac{\frac{\pi}{4}d^2}{1-\frac{\delta\ell}{\ell}} = \frac{\frac{\pi}{4} \times 4^2}{1-\frac{2.35}{12}} = 15.62 \text{ cm}^2$$

$$q_u = \frac{Q_f}{A_f} = \frac{26.25}{15.62} = 1.68 \text{ kg/cm}^2$$

46. The CPM network Diagram of a project by network technique is given below:

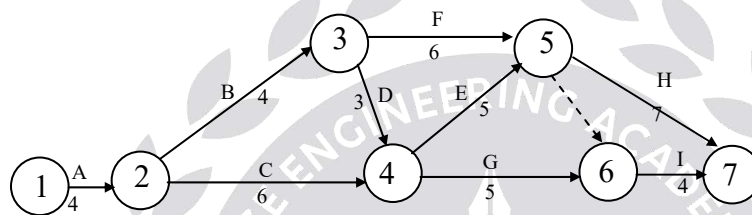


Calculate the sum of Free float of activity 2-4, Independent float of activity 4-6 and Total float of activity 6-7 .

- (A) 4 (B) 6 (C) 5 (D) 3

46. Ans: (A)

Sol: (i) The CPM network Diagram:

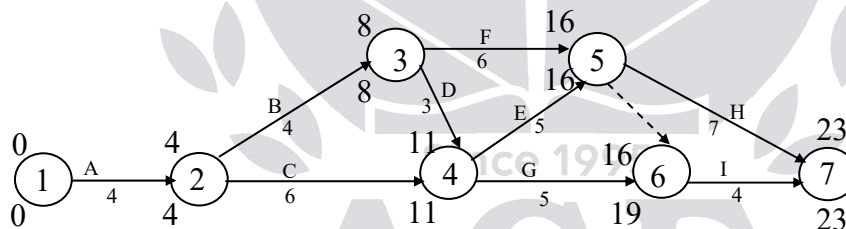

$$\text{Free float (F}_F\text{) of activity (2-4)} = (T_E^j - T_E^i) - t_{ij} = (11 - 4) - 6 = 1$$

$$\text{Independent float (I}_F\text{) of activity (4-6)} = (T_E^j - T_L^i) - t_{ij} = (16 - 11) - 5 = 0$$

$$\text{Total float (T}_F\text{) of activity (6-7)} = (T_L^j - T_E^i) - t_{ij} = (23 - 16) - 4 = 3$$

$$\text{Sum of Free float (F}_F\text{) of activity (2-4), Independent float (I}_F\text{) of activity (4-6) and Total float (T}_F\text{) of activity (6-7)} = 1 + 0 + 3 = 4$$



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs



48
ALL INDIA
1st RANKS IN GATE

15
ALL INDIA
1st RANKS IN ESE

HYDERABAD | DELHI | VIJAYAWADA | TIRUPATI | PUNE | BHUBANESWAR | BENGALURU | LUCKNOW | CHENNAI | VIZAG | KOLKATA | AHMEDABAD

ADMISSIONS ARE OPEN FOR ESE | GATE | PSUs - 2021 & 2022 @ DELHI

Streams: CE | ME | EC | EE | CS | IT | IN | PI

WEEKEND BATCHES START FROM



11th JAN 2020



8th FEB 2020

Special Discounts for Weekend Batches @ DELHI

Colleges	Individual Discounts	Group Discounts (Minimum 10 Students)	College/Branch Topper Rank 1 & 2
IIT	40% OFF on Tuition Fee	45% OFF on Tuition Fee	50% OFF on Tuition Fee
NIT/DTU/NSUT IIIT/IGDTUW	30% OFF on Tuition Fee	35% OFF on Tuition Fee	40% OFF on Tuition Fee
JMI/USICT YMCA/DCRUST UIET (MDU & KUK)	20% OFF on Tuition Fee	25% OFF on Tuition Fee	30% OFF on Tuition Fee
Other Govt. Engg. Colleges	15% OFF on Tuition Fee	20% OFF on Tuition Fee	25% OFF on Tuition Fee
IPU/AKTU MDU/KUK Affiliated Colleges	10% OFF on Tuition Fee	15% OFF on Tuition Fee	20% OFF on Tuition Fee



ARMED FORCES
CHILDREN

40% OFF
on Tuition Fee

DIFFERENTLY ABLED

50% OFF
on Tuition Fee

Single Parent
(Father Deceased)

50% OFF
on Tuition Fee

Also, Special Discounts
for Previously Qualified
ESE (Prelims/Mains)

/ GATE Students


for more details visit our website:

www.aceenggacademy.com

*Terms & Conditions Apply

Call Us Today for Career Counselling : **7838971777** | Email: delhi@aceenggacademy.com

47. Water (assumed inviscid and incompressible) flows steadily with a speed of 4 m/s from the large tank as shown in the figure. The depth, H of the layer of light liquid (Specific weight $= 8 \text{ kN/m}^3$) that covers the water in the tank is _____ m. (Assume $g = 10 \text{ m/s}^2$)

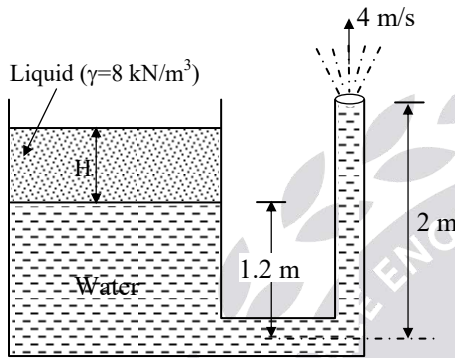

- (A) 1.6 m (B) 2.02 m
(C) 2 m (D) 1 m

47. Ans: (C)

Sol: Equivalent height (y) of H m of liquid in terms of m of water column is

$$\gamma \times H = \gamma_w \times y$$

$$\text{Or, } y = \frac{\gamma}{\gamma_w} H = \frac{8}{10} H = 0.8H$$

Applying Bernoulli's equation for points (1) (lying on the imaginary water surface) and (2) (exit of the pipe),

we get

$$\frac{P_1}{\gamma_w} + \frac{V_1^2}{2g} + Z_1 = \frac{P_2}{\gamma_w} + \frac{V_2^2}{2g} + Z_2$$


where, $P_1 = P_2 = P_{\text{atm}} = 0$; $V_1 = 0$; $V_2 = 4 \text{ m/s}$;
 $Z_1 = 1.2 + 0.8H$ and $Z_2 = 2 \text{ m}$

$$0 + 0 + 1.2 + 0.8H = 0 + \frac{4^2}{2 \times 10} + 2$$

$$0.8H = 0.8 + (2 - 1.2)$$

$$H = \frac{1.6}{0.8} = 2 \text{ m}$$

48. An axial loaded steel tie member of 100 mm wide and 12 mm thick is fillet welded to a gusset plate using 5 mm size of fillet weld as shown in figure. The yield and ultimate tensile stress of steel member are 250 Mpa and 410 Mpa respectively and The yield and ultimate tensile stress of weld are 450 Mpa and 590 Mpa respectively. The partial safety factors against yield stress, ultimate tensile stress and weld strength respectively are $\gamma_{mo}=1.10$, $\gamma_{ml}=1.25$ and $\gamma_{mw}=1.25$. The design axial load carrying capacity of the joint as per LSD of IS800:2007 is

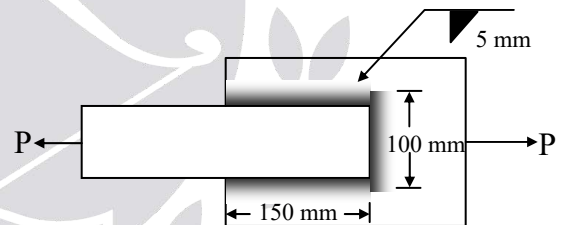

- (A) 272.72 kN (B) 381.52 kN
(C) 265.12 kN (D) 354.24 kN

48. Ans: (C)

Sol: Width of member $B = 100 \text{ mm}$


Thickness of member $t = 10 \text{ mm}$

Yield stress of member $f_y = 250 \text{ Mpa}$

Ultimate tensile stress of member

$$f_u = 410 \text{ Mpa}$$

Design axial strength of tie member based on gross section yielding

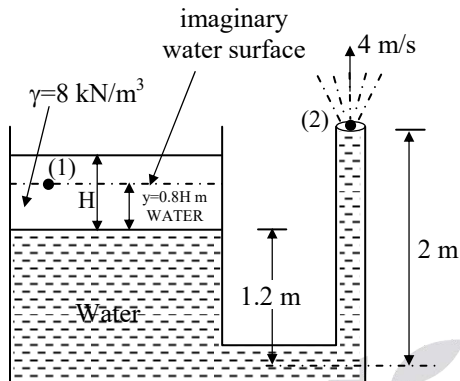

$$T_{dg} = \frac{B \times t \times f_y}{\gamma_{mo}} = \frac{100 \times 12 \times 250}{1.10}$$

$$= 272.72 \times 10^3 \text{ N} = 272.27 \text{ kN}$$

Size of fillet weld (S) = 5mm

Yield stress of weld $f_{yw} = 450 \text{ Mpa}$

Ultimate tensile stress of weld

$$f_{uw} = 590 \text{ Mpa}$$

f_u = Smaller of UTS of member (f_u) and
UTS of weld (f_{uw})
= 410 Mpa

Effective throat thickness

$$t_t = 0.7 \times 5 = 3.5 \text{ mm}$$

Effective length of fillet weld

$$L_w = 2 \times 150 + 100 = 400 \text{ mm}$$

Design shear strength of fillet weld P_{dw}

$$P_{dw} = \frac{L_w \times t_t \times f_u^1}{\sqrt{3} \times \gamma_{mw}}$$


$$= \frac{400 \times 3.5 \times 410}{\sqrt{3} \times 1.25}$$

$$= 265.12 \times 10^3 \text{ N} = 265.12 \text{ kN}$$

Design axial carrying capacity of joint

(P) = Minimum of T_{dg} and $P_{dw} = 265.12 \text{ kN}$

49. A beam, framing between columns, has an effective span of 5 m and supports a cantilever projection, 1 m wide through out its length a total uniformly distributed load (D.L + L.L) of 5 kN/m^2 (service load) on the cantilever projection as shown in figure below. As per IS:456-2000 the equivalent maximum nominal shear stress is (in N/mm^2) in the beam is

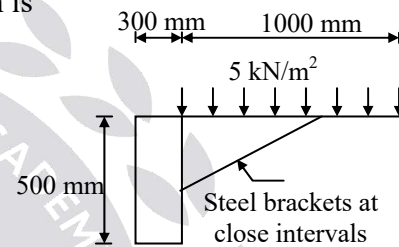

Beam with cantilevered projection

(A) 0.72 MPa



(B) 0.24 MPa

(C) 0.54 MPa


(D) 0.48 MPa

49. Ans: (A)


Sol:

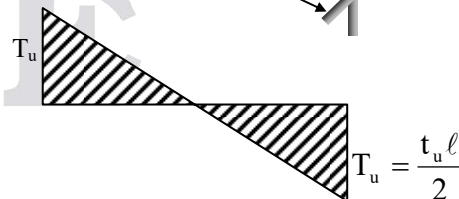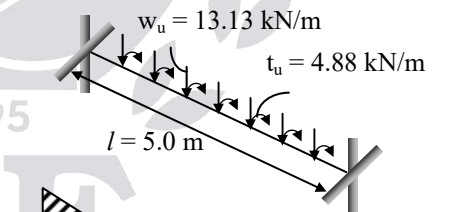

Twisting Moments Diagram



Bending Moments Diagram

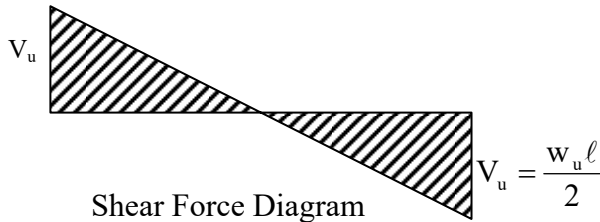

Loads on beam from projection

$$= 5 \text{ kN/m}^2 \times 1 \text{ m} = 5 \text{ kN/m}$$

From self weight = $25 \times 0.3 \times 0.5$

$$= 3.75 \text{ kN/m}$$

Total load = 8.75 kN/m

Factored distributed load, $w_u = 1.5 \times 8.75$

$$= 13.13 \text{ kN/m}$$

Eccentricity of cantilever load from beam

$$\text{centre line} = \frac{1}{2} + \frac{0.3}{2} = 0.65 \text{ m}$$

Factored distributed torque,

$$t_u = 5 \times 0.65 \times 1.5 = 4.88 \text{ kN-m/m}$$

Maximum twisting moment,

$$T_u = \frac{t_u \ell}{2} = 4.88 \left(\frac{5}{2} \right) = 12.2 \text{ kNm}$$

Maximum shear force $V_u = \frac{w_u \ell}{2} = 32.82 \text{ kN}$

Equivalent nominal shear stress,

$$\tau_v = \frac{V_u + \frac{1.6 T_u}{b}}{bd}$$

$$= \frac{32.82 \times 10^3 + 1.6 \times 12.2 \times \frac{10^6}{300}}{300 \times 452}$$

$$= 0.72 \text{ MPa}$$

$$d = 500 - 30 - 10 - 8 = 452 \text{ mm}$$

50. A rectangular concrete beam 250 mm wide and 300 mm deep is prestressed by a force of 540 kN at a constant eccentricity of 60 mm. The beam is subjected to a concentrated load of 68 kN at the centre of a span of 3 m. The position of the resultant thrust from the top fibre at the quarter span of the beam (Neglect the self weight of the beam) is

(A) 138 mm (B) 162 mm

(C) 200 mm (D) 100 mm

50. Ans: (B)

Sol: Stress due to prestressing force


$$\frac{P}{A} = \frac{540 \times 10^3}{250 \times 300} = 7.2 \text{ N/mm}^2$$

$$\frac{Pe}{Z} = \frac{540 \times 10^3 \times 60}{\frac{1}{6} \times 250 \times 300^2} = 8.6 \text{ N/mm}^2$$

Stress due to external load at the quarter of the span

$$\frac{M_L}{Z} = \frac{\frac{WL}{8}}{Z} = \frac{25.5 \times 10^6}{\frac{1}{6} \times 250 \times 300^2} = 6.8 \text{ N/mm}^2$$

Resultant stress at quarter of the span



Resultant stress diagram
at quarter span



AST

Get upto
100%
SCHOLARSHIP
on Tuition Fee

★ **ACE SCHOLARSHIP TEST** ★

A NATIONAL LEVEL SCHOLARSHIP TEST FOR ENGINEERS

GATE | ESE | PSUs

Exam Date : 23rd February 2020

@ 11:00 AM

No. of Questions: **50** (1M:25, 2M:25)

Marks : **75**

Duration : **90 Min.**

Streams : **EC | EE | ME | CE | CSIT | IN | PI**

Mode of Exam

Online



* AI based proctoring examination

* Test can be written from anywhere by using Computer (Desktop or Laptop) and Webcam.

Syllabus for **2nd Year Students - Aptitude Paper**

Engg. Mathematics : 20 Q

Numerical Ability : 20 Q

Verbal Ability : 10 Q

Syllabus for **3rd / 4th Year & Passed-out Students - Technical Paper**

EEE		ECE / IN		CS & IT		CE		ME / PI	
Subject	No. of Questions	Subject	No. of Questions	Subject	No. of Questions	Subject	No. of Questions	Subject	No. of Questions
Networks	5 Q	Networks	6 Q	DS, PL & Algorithm	10 Q	SOM	5 Q	SOM	6 Q
Control System	5 Q	Control System	6 Q	DBMS	5 Q	FM & HM	5 Q	FM & HM	5 Q
Analog Electronics	4 Q	Analog Electronics	5 Q	Computer Networks	5 Q	Geo Technical Engg.	7 Q	TOM	6 Q
Digital Electronics	5 Q	Digital Electronics	5 Q	Operating System	6 Q	Environmental	7 Q	Machine Design	4 Q
Electrical Machines	8 Q	Signal & Systems	5 Q	Computer Organization	4 Q	Transportation	4 Q	Thermal	7 Q
Power System	7 Q	EDC & VLSI	5 Q	Theory of Computation	6 Q	RCC & STEEL	6 Q	Heat Mass Transfer	4 Q
Power Electronics	6 Q	Communications	8 Q	Digital Electronics	4 Q	Surveying	6 Q	Production	8 Q
Engg. Maths	5 Q	Engg. Maths	5 Q	Engg. Maths	5 Q	Engg. Maths	5 Q	Engg. Maths	5 Q
Numerical / Verbal Ability	5 Q	Numerical / Verbal Ability	5 Q	Numerical / Verbal Ability	5 Q	Numerical / Verbal Ability	5 Q	Numerical / Verbal Ability	5 Q

Allocation of Scholarships

100% Fee Waiver*
1st Position
(50 Members)

75% Fee Waiver*
2nd Position
(100 Members)

50% Fee Waiver*
3rd Position
(250 Members)

4th Position (400 Members) **30% Fee Waiver** | **5th Position** (700 Members) **20% Fee Waiver***
6th Position (1000 Members) **10% Fee Waiver***

(The above given positions should achieve Min. 50% of marks in the test).

Applicable for Batches Commencing between

April 2020 - July 2020

Visit our website for online registrations

www.aceenggacademy.com

Fee **₹ 100/-**

* on Tuition Fee

IMPORTANT DATES : Registrations Start from : **8th December 2019**, End Date: **14th February 2020** | Exam Date: **23rd February 2020**



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs



48

ALL INDIA
1st RANKS IN GATE



15

ALL INDIA
1st RANKS IN ESE

Contact: **040-23234418/19/20** | Email: **hyderabad@aceenggacademy.com**

HYDERABAD | TIRUPATI | DELHI | PUNE | BHUBANESWAR | BENGALURU | LUCKNOW | CHENNAI | VIJAYAWADA | VIZAG | KOLKATA | AHMEDABAD



Stress at top:

$$f_t = \frac{P}{A} - \frac{Pe}{Z} + \frac{M_L}{Z} = 5.4 \text{ N/mm}^2$$

Stress at bottom:

$$f_b = \frac{P}{A} + \frac{Pe}{Z} - \frac{M_L}{Z} = 9 \text{ N/mm}^2$$

Location of the resultant thrust from top

$$y = \frac{A_1 y_1 + A_2 y_2}{A_1 + A_2}$$

$$= \frac{(5.4 \times 300)150 + \left(\frac{1}{2} \times 300 \times 3.6\right)200}{(5.4 \times 300) + \left(\frac{1}{2} \times 300 \times 3.6\right)}$$

$$= 162 \text{ mm}$$

51. A line measures 100 mm on a photograph taken with a camera having focal length of 200 mm. The same line measures 30 mm on a map drawn to a scale of $\frac{1}{40,000}$. If the average altitude is 200 m, the flying height of air craft is

- (A) 2200 m (B) 2400 m
(C) 2600 m (D) 3000 m

51. Ans: (C)

Sol: $\frac{\text{Photo scale}}{\text{MapScale}} = \frac{\text{Photo distance}}{\text{Map distance}}$

$$\text{Photo Scale} = \frac{1}{40,000} \times \frac{100}{30} = \frac{1}{12,000}$$

$$S = \frac{f}{(H-h)} = \frac{1}{12,000} = \frac{200 \times 10^{-3}}{(H-200)}$$

$$H = 2600 \text{ m}$$

52. An ASP operating at a flow rate 10000 m³/day with influent BOD 300 mg/l and with MLSS concentration 3000 mg/lit designed for $\frac{F}{M}$ ratio 0.2 d⁻¹. Find mean cell residence time in days if the MLSS in return sludge is 10000 mg/lit. Waste sludge flow rate is 200 m³/d. Take BOD and MLSS of effluent is zero.

- (A) 0.15 days (B) 15 days
(C) 10 days (D) 7.5 days

52. Ans: (d)

Sol: $Q = 10000 \text{ m}^3/\text{day}$ $y_i = 300 \text{ mg/l}$

$\therefore y_e$ is not given $\therefore y_e = 0$

$X : 3000 \text{ mg/lit}$ $\frac{F}{M} = 0.2 \text{ d}^{-1}$

$$\frac{F}{M} = \frac{Q(y_i - y_e)}{Vx}$$

$$0.2 = \frac{10000 \times (300 - 0)}{V \times 3000}$$

$$V = \frac{10000 \times 300}{3000 \times 0.2} = 5000 \text{ m}^3$$

$$\text{MCRT, } \theta_c = \frac{Vx}{Q_w X_u + (Q - Q_w) \times X_e}$$

$\therefore X_e$ is not given

$\therefore X_e = 0$

$$\theta_c = \frac{5000 \times 3000}{200 \times 10000} = 7.5 \text{ days}$$

53. In a standard BOD test conducted on 4% sewage sample with no DO mixed with distilled water containing a DO of 8 mg/l. After 5 day incubation at 20°C it's final DO is 1.6 mg/l. To expect same BOD at temperature 35°C how many days it will take.



- (A) 1 (B) 2.51
(C) 152 (D) 160

53. Ans: (b)

Sol: $y_5^{20^\circ\text{C}} = y_t^{35^\circ\text{C}}$

$$L_o [1 - e^{-K_{20} \times 5}] = L_o [1 - e^{-K_{35} \times t}]$$

$$K_{20} \times 5 = K_{20} (1.047)^{35-20} \times t$$

$$t = \frac{5}{(1.047)^{15}} = 2.51 \text{ days}$$

54. Consider the differential equation

$$\frac{dy}{dx} + 2xy = e^{-x^2} \text{ with initial condition } y(0) = 1.$$

The value of $y(1) =$ _____.

54. Ans: 0.7357 Range: 0.73 to 0.74

Sol: Given $\frac{dy}{dx} + 2xy = e^{-x^2}$ (1)

with $y(0) = 1$ (2)

$$\therefore \text{I. F.} = e^{\int 2x \, dx} = e^{x^2}$$

Now, the general solution of (1) is

$$\Rightarrow y \cdot e^{x^2} = \int e^{x^2} \cdot e^{-x^2} \, dx + c$$

$$\Rightarrow y \cdot e^{x^2} = x + c \quad \text{..... (3)}$$

Using (2), (3) becomes

$$\Rightarrow 1 = 0 + c \Rightarrow c = 1$$

$$y = x \cdot e^{-x^2} + e^{-x^2}$$


$$y = (x + 1) e^{-x^2}$$

$$\therefore y(1) = 2 \times e^{-1} = 0.7357$$

55. A suspension cable, having supports at same level, has span of 30 m and maximum dip of 5 m. The cable is loaded with uniformly distributed load of 20 kN/m throughout its length and the concentrated load of 30 kN and 60 kN at middle third points. The maximum tension in the cable (in kN)

55. Ans: 638.54 kN Range: 638 to 639

Sol:

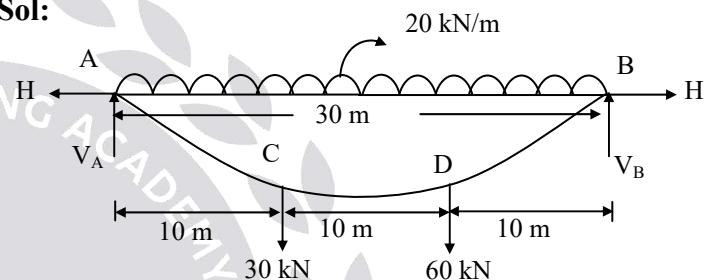


$$M_A = 0$$

$$V_B \times 30 = 30 \times 10 + 60 \times 20 + 20 \times 30 \times 15$$

$$V_B = 350 \text{ kN}$$

$$V_A + V_B = 20 \times 30 + 30 + 60$$

$$V_A = 340 \text{ kN}$$

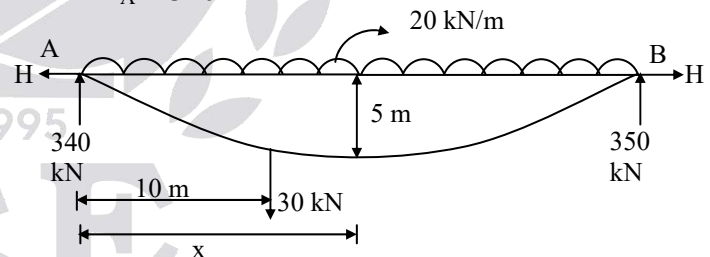

Let max dip of 5 m be at a distance 'x' from 'A'. At this section tension in the cable will be horizontal and hence vertical component of tension in cable is zero.

Considering equilibrium of left portion of cable

Equating sum of vertical forces to zero

$$340 - 20 \times x - 30 = 0$$

$$x = 15.5 \text{ m}$$



Taking moment about 'A'

$$5 \times H + 15.5 \times 20 \times \frac{15.5}{2} + 30$$

$$\times 5.5 - 340 \times 15.5 = 0$$

$$H = 540.5 \text{ kN}$$

Maximum tension in cable occur at A

$$T_{\max} = \sqrt{340^2 + 540.5^2} \text{ m}$$

$$= 638.54 \text{ Kn}$$

56. In a Concrete gravity dam of specific gravity 2.5, limiting height with uplift coefficient (c) is found to be 20% more than that with zero uplift coefficient. Value of c is _____ (rounded up to 2 decimal values).

56. Ans: 0.583 Range: 0.58 to 0.59

Sol:
$$\frac{H_1}{H_2} = \frac{\frac{f}{w(s-c+1)}}{\frac{f}{w(s+1)}} = \frac{120}{100}$$

$$\frac{2.5+1}{2.5-c+1} = 1.2 = \frac{6}{5}$$

$$12.5 + 5 = 15 - 6c + 6$$

$$6c = 21 - 17.5 = 3.5$$

$$c = \frac{3.5}{6} = 0.583$$

57. The ordinates of 6-hr UH at 3 hours time intervals starting from time $t = 0$ are 0, 5, 35, 64, 72, 62, 46, 33, 21, 12, 6, 4 & 0 m^3/sec . The peak ordinate of S_6 -curve would be _____ m^3/sec [Upto 1 decimal places].

57. Ans: 180.0144 m^3/sec

Range: 179.9 to 180.1

Sol: Given data:

$$\Sigma O'' = 5 + 35 + 64 + 72 + 62 + 46 + 33 + 21 + 12 + 6 + 4 = 360 \text{ m}^3/\text{s}$$

$$\Delta t \Sigma O'' = C.A \times 0.01$$

$$3 \times 3600 \times 360 = C.A \times 0.01$$

$$C.A = 388.8 \text{ km}^2$$

$$Q_c = 2.778 \frac{A}{D}$$

$$Q_c = 2.778 \times \frac{388.8}{6}$$

$$Q_c = 180.0144 \text{ m}^3/\text{sec}$$

58. Water is percolating through a rectangular silty earth fill found on impervious soil length of the earth fill is 30 meters and thickness is 15 metres, U/s water level is 5 metres over the impervious soil. The total seepage loss rate through the earth fill, if its effective grain size is 0.02 mm _____ m^3/day . (Rounded upto two decimal places).

58. Ans: 17.28 Range: 17.27 – 17.30

Sol: Area of flow = $30 \times 5 = 150 \text{ m}^2$

Length of flow = Thickness of earth fill
= 15 m

$$i = \frac{h}{L} = \frac{5}{15} = \frac{1}{3}$$

\therefore Given $D_{10} = 0.02 \text{ mm}$
= 0.002 cm

$$K = 100 D_{10}^2$$

$$= 100 \times (0.002)^2$$

$$= 4 \times 10^{-4} \text{ cm/sec}$$

$\therefore Q = KiA$

$$= 4 \times 10^{-4} \times 10^{-2} \times 60 \times 60 \times 24 \times \frac{1}{3} \times 150$$

$$= 17.28 \text{ m}^3/\text{day}$$



ACE[®]
Engineering Academy
Leading Institute for ESE/GATE/PSUs



HYDERABAD | TIRUPATI | DELHI | PUNE | BHUBANESWAR | BENGALURU | LUCKNOW | CHENNAI | VIJAYAWADA | VIZAG | KOLKATA | AHMEDABAD

DIGITAL CLASSES

for

ESE

GS & Engg. Aptitude

250+

Hours of Classes
with Quizzes

GATE

CS & IT

450+

Hours of Classes
with Quizzes

Launching Soon! for ECE | EEE | MECH | CE | IN



Erudite &
Experienced
Faculty



Free Online
Test Series



Relevant Study Material
by Post



Doubt Clearing
Available



Access the Lectures
from anywhere
and Unlimited Times



Write & Store
Your Notes Online



EMI Option
Available

DEEP LEARN

Access The Course at
www.deep-learn.in

Call: 040-23234418/19/20 | web: www.aceenggacademy.com



59. A plate load test is carried out on a 30 cm square plate placed at 1 metre below ground level on a clay deposit load required to cause 25 mm settlement was 7.2 tonnes. A square column footing is to be provided at a depth of 2 m below ground level to take Net load of 100 tonnes, the size of footing, if the settlement of footing is restricted to 15 mm only and factor of safety against shear failure is 3 shall be ____ (in meters) (As per Terzaghi's theory), Given $\gamma = 1.9 \text{ gm/cc}$.

59. Ans : 2.55

Range: 2.50 – 2.60

Sol: Plate load test:

$$B_p = 0.3 \text{ m} \Rightarrow q_u = \frac{7.2}{0.3 \times 0.3} = 80 \text{ t/m}^2$$

As settlement of footing is different from settlement of plate

Consider bearing capacity for footing settlement

$$\therefore q \propto S$$

$$\frac{q_2}{q_1} = \frac{S_2}{S_1} \Rightarrow q_2 = \frac{15}{25} \times 80 ; \quad q_2 = 48 \text{ t/m}^2$$

From plate load test:

Square footing:

$$q_u = 1.3 C N_c + \gamma D N_q + 0.4 \gamma B N_\gamma$$

Given is clay soil : $\phi = 0^\circ$

$$N_c = 5.7, N_q = 1, N_\gamma = 0$$

$$\therefore q_u = 1.3 \times C \times 5.7 + \gamma D \quad (1 \text{ gm/cc} = 1 \text{ t/m}^3)$$

$$48 = 1.3 \times C \times 5.7 + 1.9 \times 1$$

$$\therefore C = 6.22 \text{ t/m}^2$$

Now for actual footing:

Given

$$Q_n = 100 \text{ tonnes}$$

$$q_n \leq q_{ns}$$

$$q_n = \frac{q_{nu}}{F}$$

$$\frac{Q_n}{B^2} = \frac{1.3 C N_c}{F}$$


$$\frac{100}{B^2} = \frac{1.3 \times 6.22 \times 5.7}{3} \quad \therefore B = 2.55 \text{ m}$$

60. The ratio of friction factors (f_1/f_2) in two different pipes with same fluid is 0.5. The average flow velocity in pipe-1 is 0.15 m/s and the pipe diameter is 0.1 cm. The flow in the pipes can be assumed to be laminar. The radius of pipe-2 is 0.2 cm. The average velocity in pipe-2 is _____ m/s. (Rounded off to three decimal places)

60. Ans: 0.019

(Range: 0.018 to 0.020)

Sol:

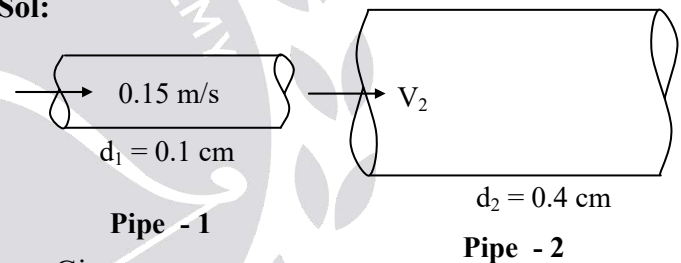

Given:

$$\frac{f_1}{f_2} = 0.5$$

Flow is laminar in both pipes.

We know that in laminar flow through a pipe,

$$f = \frac{64}{\text{Re}} = \frac{64\nu}{Vd}$$

Thus,

$$\frac{f_1}{f_2} = 0.5 = \frac{64\nu}{0.15 \times 0.1 \times 10^{-2}} \times \frac{V_2 \times 0.4 \times 10^{-2}}{64\nu}$$

On simplification

$$0.5 = \frac{V_2 \times 0.4}{0.15 \times 0.1}$$

$$\Rightarrow V_2 = 0.01875 \text{ m/s} \approx 0.019 \text{ m/s}$$

Hearty Congratulations to our **GATE-2019 Top Rankers**

AIR 1 	AIR 1 	AIR 1 	AIR 1 	AIR 1 
PRAKHAR SINGH CE	SURYANARYANA PI	RAJAT SONI EC	PRANAV SHARMA CSIT	SHASHANK MANGAL IN

AIR 2 	AIR 2 	AIR 2 	AIR 2 	AIR 2 	AIR 3 	AIR 3 
KUNAL G EE	MUKESH POONIA EE	ANAND JERRY GEORGE EC	PRIYANKA GUPTA IN	VINAY SEELAM PI	ANKIT KULHARI ME	IDRIS MANAJBAWA CE

AIR 3 	AIR 3 	AIR 3 	AIR 3 	AIR 4 	AIR 4 	AIR 4 
SHUBHAM MAURYA EC	PRATEEK AGARWAL CSIT	VINEET GOSWAMI IN	ROHIT KHANNA PI	CHETAN HANAKANAHALLI EC	CHAITANYA KUMAR EC	ARJUNDAS K IN

AIR 4 	AIR 4 	AIR 5 	AIR 5 	AIR 5 	AIR 5 	AIR 5 
RAJ BHAWANI SINGH IN	SIDDHARTH WADHWA ME	SAYANTAN BHATTACHARYA EE	PRADEEP KUMAR VERMA EE	CHARMIN PATEL ME	AYUSH JHAM PI	RUTVIK LATHIA XE

AIR 6 	AIR 6 	AIR 6 	AIR 6 	AIR 7 	AIR 7 	AIR 7 
PRIYANSHU SHARMA EC	HARI SHRAWGI CSIT	RAMESH KAMULLA IN	RAJ ZUNKLE PI	CHIRAG RATHI CE	SHREYANS MEHTA CE	ANKIT KUMAR EC

AIR 7 	AIR 7 	AIR 7 	AIR 7 	AIR 7 	AIR 7 	AIR 7 
SAIKIRAN CHOLLETI EC	DEEPIITA ROY EE	SHUBHAM MITTAL EE	SAISH KALASKAR IN	SHWETA YADAV IN	AMIT LAL SHAH PI	ANUJ MEENA PI

AIR 9 	AIR 9 	AIR 9 	AIR 9 	AIR 9 	AIR 9 	AIR 10 
RAVI SHANKAR MISHRA CSIT	ARKA RAY CSIT	RANJIT KUMAR SINGH EC	DEEP ADVARYU IN	B. SREEKAR IN	ATULYA JYOTI PI	GEETH GEORGE EE

AIR 10 	AIR 10 	AIR 10 	AIR 10 	AIR 10 
ASIF KHAN CE	MAHESH SINGH YADAV ME	GARVIT GUPTA XE	MANMOHAN ARORA PI	SHUBHAM PANDE PI

and many more...


C	TOP 10	TOP 100	M	TOP 10	TOP 100	E	TOP 10	TOP 100	E	TOP 10	TOP 100	C	TOP 10	TOP 100	I	TOP 10	TOP 100	P	TOP 10	TOP 100
CE	5	44	ME	6	60	EE	7	71	EC	9	74	CS	5	28	IN	10	74	PI	10	49



61. An instrument was set up at P and the angle of depression to a vane 3 m above the foot of the staff held at Q was $4^\circ 30'$. The horizontal distance between P and Q was known to be 1000 m. If the height of instrument axis is 450.250 m, the R.L of the staff station 'Q' (in m, upto two decimal places) is _____. (Consider the combined correction).

61. Ans: 368.617 m Range: 368.60 to 368.63

Sol:

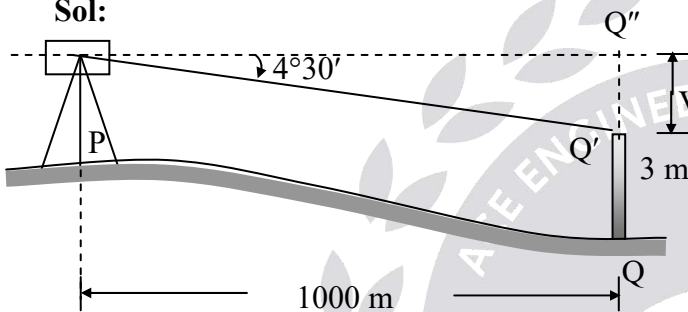

$$V = 1000 \tan 4^\circ 30' = 78.70 \text{ m}$$

$$\text{Correct value of } V = 78.70 - 0.06735 \times 1^2 = 78.633 \text{ m}$$

$$\text{RL of Q} = 450.250 - 78.633 - 3 = 368.617 \text{ m}$$

62. A waste water with a flow rate of 10 MLD containing a solids concentration of 200 mg/l applied to sedimentation tank with particle removal efficiency 80%. Find the volume of sludge produced in m^3 in a day from the tank if moisture content of sludge is 98% and specific gravity of solids is 2.7

62. Ans: 79.05 Range: (78.5 - 80)

Sol: Mass of solids wasted /day = $Q \times (\eta_{ST} \times C_{in})$

$$= 10 \times \left(\frac{80}{100} \times 200 \right)$$

$$= 1600 \text{ kg/day}$$

Volume of sludge produced/day

$$= \frac{100}{100 - P} \times \frac{M}{\rho_{slu}} \quad P = 98\%$$

$$\frac{100}{S_{slu}} = \frac{\% \text{Sol}}{S_{sol}} + \frac{\% m_c}{S_w} \Rightarrow \frac{100}{S_{slu}} = \frac{2}{2.7} + \frac{98}{1}$$

$$S_{slu} = 1.012 \quad \rho_{slu} = S_{slu} \times \rho_w$$

$$= 1.012 \times 1000 = 1012 \text{ kg/m}^3$$

Volume of sludge produced /day

$$= \frac{100}{100 - P} \times \frac{M}{\rho_{slu}}$$

$$= \frac{100}{(100 - 98)} \times \frac{1600}{1012} = 79.05 \text{ m}^3$$

63. A rectangular sedimentation tank of length 30 m depth 3 m operating at a flow rate $1 \text{ m}^3/\text{sec}$ with flow velocity 0.5 cm/sec . Find surface area of sedimentation tank required in m^2 for 100% removal of particles.

63. Ans: 2000

Range: No Range

Sol: L : 30 m H : 3 m

$$Q : 1 \text{ m}^3/\text{sec} \quad V_H : 0.5 \text{ cm/sec} = 0.5 \times \frac{1}{100} \text{ m/s}$$

For 100% removal

$$\frac{H}{V_s} \leq \frac{L}{V_H} \Rightarrow V_s \cdot V_H \times \frac{H}{L}$$

$$= 0.5 \times \frac{1}{100} \times \frac{3}{30} \text{ m/sec}$$

$$\text{And } V_s = V_o = 0.5 \times \frac{1}{100} \times \frac{3}{30} \text{ m/s}$$

$$\text{Surface area} = A_s = \frac{Q}{V_o} = \frac{1}{0.5 \times \frac{1}{100} \times \frac{3}{30}} \text{ m}^2$$


$$= 2000 \text{ m}^2$$



64. A simply supported beam of 10 m span is subjected to two point loads of 20 kN each placed at a distance of 2 m from each of the free ends. The cross-section of the beam is 200 mm wide and 400 mm deep. The major principal stress at the middle of the beam at the bottom extreme fibre is ____ MPa. (rounded to one decimal place)

64. Ans: 7.5 Range: No Range

Sol:

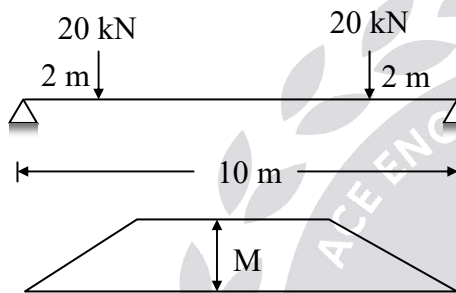

Maximum BM (at mid span), $M = 20 \times 2$
 $= 40 \text{ kN-m}$

At the extreme bottom fibre of the mid span, maximum bending stress is the major principal stress

$$F = \frac{M}{I} \times y_{\max} = \frac{40 \times 10^6}{\left[\frac{200 \times 400^3}{6} \right]} = 7.5 \text{ MPa}$$

65. A retaining wall of height 6 m retains a clay soil having unit weight of $\gamma = 20 \text{ kN/m}^3$, $C = 15 \text{ kN/m}^2$ and $\phi = 30^\circ$. The percentage reduction in depth of tensile crack due to rise in water table from the base of footing to ground surface shall be ____% ($\gamma_w = 10 \text{ kN/m}^3$)

65. Ans: 50%

Range: No Range

Sol: $H = 6 \text{ m}$

$Z_c = \text{tensile crack depth}$

Initial : No W.T

At $Z = Z_c$: $P_a = \text{Active earth pressure}$

$$P_a = 0, \sigma_v = \gamma \cdot Z_c$$

$$K_a \sigma_v - 2c \sqrt{K_a} = 0$$

$$Z_{c1} = \frac{2C}{\gamma \sqrt{K_a}}$$

Final: WT at G.L

At $Z = Z_c$: $P_a = 0$

$$\sigma_v = \gamma_{\text{sat}} Z_c$$

Assume $\gamma' = \gamma_{\text{sat}}$

$$K_a \sigma_v - 2C \sqrt{K_a} = 0$$

$$K_a \cdot \gamma' \cdot Z_c + \gamma_w Z_c - 2c \sqrt{K_a} = 0$$

$$\therefore Z_{c2} = \frac{2C \sqrt{K_a}}{(K_a \gamma' + \gamma_w)}$$

Given:

$$C = 15 \text{ kN/m}^2$$

$$\phi = 30^\circ \Rightarrow K_a = \frac{1}{3}$$

$$\gamma = 20 \text{ kN/m}^3$$

$$Z_{c1} = \frac{2 \times 15}{20 \times \sqrt{1/3}} = 2.6 \text{ m}$$

$$Z_{c2} = - \frac{2 \times 15 \times \sqrt{1/3}}{\left(\frac{1}{3} \times 10 + 10 \right)} = 1.3 \text{ m}$$

% Reduction in crack depth

$$= \frac{2.6 - 1.3}{2.6} \times 100 = 50\%$$

Hearty Congratulations to our **ESE-2019 Top Rankers**

AIR 1  KARTIKEYA SINGH EE	AIR 1  RAJAT SONI E&T	AIR 1  HARSHAL BHOSALE ME	AIR 1  ABUZAR GAFFARI CE	
AIR 2  SHAMBHAVI T EE	AIR 2  ANKUSH MANGLA E&T	AIR 2  SAHIL GOYAL ME	AIR 3  ABHISHEK ANAND EE	AIR 3  ROHIT KUMAR E&T
AIR 3  KUMAR CHANDAN ME	AIR 3  AMARJEET CE	AIR 4  ANKIT TAYAL EE	AIR 4  AMIR KHAN E&T	AIR 4  SAURAV ME
AIR 4  AMAN GULIA CE	AIR 5  KUMAR MAYANK EE	AIR 5  AYUSH CHANDRA CE	AIR 6  RITESH LALWANI EE	AIR 6  PUSHPAK ME
AIR 6  KABIL BHARGAVA CE	AIR 7  KARTIKEY SINGH EE	AIR 7  RAHUL JAIN E&T	AIR 7  MANISH RAJPUT ME	AIR 8  KULDEEP KUMAR E&T
AIR 8  HEMANT KUMAR SINGH ME	AIR 8  YOGESH KUMAR CE	AIR 9  DEEPITA ROY EE	AIR 9  SHUBHAM KARNANI E&T	AIR 9  DWEET SABAPARA ME
AIR 9  ANKIT KUMAR CE	AIR 10  ANKITA SHARMA EE	AIR 10  GAURAV SRIVASTAVA E&T	AIR 10  SUMIT BHAMBOO ME	and many more...

Total Selections in **Top 10: 33** | **EE : 9** | **E&T : 8** | **ME : 9** | **CE : 7**