


GATE - 2021

Questions Questions Detailed Solutions

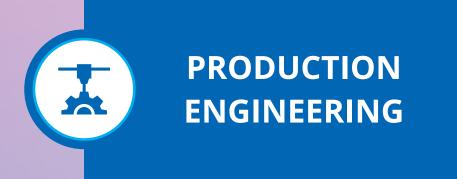

ACE Engineering Academy has taken utmost care in preparing the **GATE - 2021** Examination Solutions. Discrepancies, if any, may please be brought to our notice. ACE Engineering Academy do not owe any responsibility for any damage or loss to any person on account of error or omission in these solutions.

ACE Engineering Academy is always in the fore front of serving the students, irrespective of the examination type (GATE / ESE / PSUs / PSC / GENCO / TRANSCO etc.,).



GATE - 2021

PRODUCTION & INDUSTRIAL ENGINEERING Questions with Detailed Solutions

06/02/21 Afternoon Session

SUBJECTWISE WEIGHTAGE

S. No.	NAME OF THE SUBJECT	Number of Questions
01	Engineering Mechanics	02
02	Strength of Materials	03
03	Theory of Machines & Vibrations	0
04	Machine Design	03
05	Fluid Mechanics & Turbo Machinery	04
06	Heat Transfer	01
07	Thermodynamics	02
08	IM & OR	15
09	Production	18
10	Engineering Materials	01
11	Engineering Mathematics	06
12	Verbal Ability & Numerical Ability	10
	Total No. of Questions	65

Section: General Aptitude

- 01. The current population of a city is 11,02,500. If it has been increasing at the rate of 5% per annum, what was its population 2 years ago?
 - (a) 9,92,500
- (b) 12,51,506
- (c) 10,00,000
- (d) 9,95,006

01. Ans: (c)

Sol:
$$P \times (105\%)^2 = 1102500$$

 $P = 1000000$

- 02. Nostalgia is to anticipation as _____ is to _____ Which one of the following options maintains a similar logical relation in the above sentence?
 - (a) Past, future
- (b) Future, past
- (c) Future, present
- (d) Present, past

02. Ans: (a)


- **Sol:** Nostalgia (means excessively sentimental yearning for return to or of some past period) is to anticipation (means visualization of a future event or state)
- 03. p and q are positive integers and $\frac{p}{q} + \frac{q}{p} = 3$, then, $\frac{p^2}{q^2} + \frac{q^2}{p^2} =$
 - (a) 11
- (b) 7
- (c) 3
- (d) 9

03. Ans: (b)

Sol:
$$\frac{p}{q} + \frac{q}{p} = 3$$

 $\left(\frac{p}{q} + \frac{q}{p}\right)^2 = 3^2$
 $\frac{p^2}{q^2} + \frac{q^2}{p^2} + 2 = 9$
 $\frac{p^2}{q^2} + \frac{q^2}{p^2} = 7$

04.



The number of minutes spent by two students, X and Y, exercising every day in a given week are shown in the bar chart above.

The number of days in the given week in which one of the students spent a minimum of 10% more than the other student, on a given day, is

- (a) 5
- (b) 4
- (c) 7
- (d) 6

04. Ans: (d)

Sol: Sunday 65 > 110 % (55) (Y > X)

Saturday 60 > 110 % (50) (X > Y)

Friday 35 > 110 % (20) (Y > X)

Wednesday 60 > 110 % (50) (X > Y)

Tuesday 65 > 110 % (55) (Y > X)

Monday 70 > 110 % (45) (Y > X)

Total 6 days, one student is 10% more than another student.

05. Given below are two statements and two conclusions.

Statement 1: All purple are green.

Statement 2: All black are green.

Conclusion I: Some black are purple.

Conclusion II: No black is purple.

Based on the above statements and conclusions, which one of the following options is logically CORRECT?



- (a) Either conclusion I or II is correct.
- (b) Only conclusion I is correct.
- (c) Both conclusion I and II are correct.
- (d) Only conclusion II is correct.

05. Ans: (a)

Sol:




Diagram 1

No black is purple




Diagram 2

Some black are purple

From above diagrams (1) & (2), it is clear that either conclusion I or II is correct.

06. Computers are ubiquitous. They are used to improve efficiency in almost all fields from agriculture to space exploration. Artificial intelligence (AI) is currently a hot topic. AI enables computers to learn, given enough training data. For humans, sitting in front of a computer for long hours can lead to health issues.

Which of the following can be deduced from the above passage?

(i) Nowadays, computers are present in almost all places.

- (ii) Computers cannot be used for solving problems in engineering
- (iii) For humans, there are both positive and negative effects of using computers.
- (iv) Artificial intelligence can be done without data.
- (a) (i) and (iii)
- (b) (ii) and (iv)
- (c) (ii) and (iii)
- (d) (i). (iii) and (iv)

06. Ans: (a)

Sol: The passage deduces that computers are present every where and they have both positive and negative effects on humans.

07. Consider a square sheet of side 1 unit. In the first step, it is cut along the main diagonal to get two triangles. In the next step, one of the cut triangles is revolved about its short edge to form a solid cone. The volume of the resulting cone, in cubic units, is


(a)
$$\frac{3\pi}{2}$$


(c)
$$\frac{\pi}{3}$$

(d)
$$\frac{2\pi}{3}$$


07. Ans: (c)

Sol:





Solid core formed by revolving triangle abouts its short edge



Volume of solid cone =
$$\frac{1}{3} \times \pi \times 1^2 \times 1 = \frac{\pi}{3}$$



RECORDED VIDEO LECTURES



Additional Subjects/Topics of ESE with respect to GATE

Civil	Mechanical	ECE	Electrical

Subject wise courses available for SSC-JE (English)						
Biology	Indian Polity & Governance	General Intelligence & Reasoning	Indian Geography			
Estimation & Costing (Hindi & English)	Structural Analysis	Strength of Materials	Surveying (Geomatics)			
Irrigation Engineering	Hydrology	Environmental Engg.	RCC & PSC			
Transportation Engg.	Geo-Technical Engg.	Fluid Mechanics	Building Materials			

^{*} Remaining Subjects Launching Soon!

Subject wise courses available for GATE / ESE (Hindi) Signals & Systems - EC/EE/IN Communications - EC Control Systems - EC/EE/IN Network Theory - EC/EE/IN Power Systems - EE IM & OR - Mech./PI

* All Subjects Launching Soon!

SALIENT FEATURES

- Dynamic & Experienced Faculty.
- Covers Exam Preparation Strategy and Live Doubt clearing sessions.
- Facilitates Enhanced learning by incorporating 2d & 3d animations.
- Compose online study notes and save it for future reference.
- Comprises of weekly self assessment tests.
- Free Interview Guidance & Post GATE Guidance for subscribers.
- ASK AN EXPERT feature for doubt clarifications via emails/video (services to be availed within 12 hrs.)
- Procure Full set of Study Material (Optional)*
- EMI option available.



Scan QR Code

Download the Deep Learn Android App



www.deep-learn.in

6

www.aceenggacademy.com

Support@frostinteractive.com

hyderabad@aceenggacademy.com

040-23234418/19/20



08. Consider the following sentences;

- (i) I woke up from sleep
- (ii) I woked up from sleep.
- (iii) I was woken up from sleep.
- (iv) I was wokened up from sleep.

Which of the above sentences are grammatically CORRECT?

- (a) (ii) and (iii)
- (b) (i) and (iv)
- (c) (i) and (ii)
- (d) (i) and (iii)

08. Ans: (d)

Sol: Wake pastense is woke and third form is woken So, the verb forms are

V1


V2

V3

wake woke

woken

09.




Corners are cut from an equilateral triangle to produce a regular convex hexagon as shown in the figure above.

The ratio of the area of the regular convex hexagon to the area of the original equilateral triangle is


- (a) 4:5
- (b) 5: 6
- (c) 3:4
- (d) 2:3


09. Ans: (d)

Sol:




Area Hexagon = 6 Small Area Triangles





$$\frac{\text{Area of Hexagon}}{\text{Area of Original Triangle}} = \frac{6 \text{ A}}{9 \text{ A}} = \frac{2}{3}$$


10.




The least number of squares that must be added so that the line P-Q becomes the line of symmetry is

- (a) 6
- (b) 3
- (c) 7
- (d) 4

10. Ans: (a) Sol:





6 squares to be added



Streams: EC | EE | ME | CE | CS | IN | PI

ONLINE COURSES ((•))

for ESE | GATE | PSUs curated by India's best minds. Access courses through Android App (Mobile/Tab) from anywhere.

We have subscriptions options of 3 months, 6 months, 12 months, 18 months & 24 months.

RECORDED VIDEO LECTURES

REC ●

- GATE + PSUs (650+ Hours*)
- ESE: General Studies (250+ Hours*)
- SSC-JE: Technical (Civil) (400+ Hours*)
- ESE + GATE + PSUs (1000+ Hours*)
- SSC-JE: GS (200+ Hours*)
- Subject wise courses available for SSC JE : GS & Tehcnical (Civil).
- Subject wise courses available for GATE / ESE (Hinglish mode).

* Lectures

SALIENT FEATURES

- Dynamic & Experienced Faculty.
- Covers Exam Preparation Strategy and Live Doubt clearing sessions.
- Facilitates Enhanced learning by incorporating 2d & 3d animations.
- Free Online Test Series (Total 116 tests, subject wise, sectional wise, and full length mock tests.
- Compose online study notes and save it for future reference.
- · Comprises of weekly self assessment tests.
- Free Interview Guidance & Post GATE Guidance for subscribers.
- ASK AN EXPERT feature for doubt clarifications via emails/video (services to be availed within 12 hrs.)
- Procure Full set of Study Material (Optional)*
- EMI option available.



Use Code: **GATE5**

Valid till 28th Feb



Scan QR Code

Download the Deep Learn Android App



www.deep-learn.in

?

 $>\!\!<$

www.aceenggacademy.com

Support@frostinteractive.com

hyderabad@aceenggacademy.com

040-23234418/19/20



PRODUCTION ENGINEERING

01. If (3i+1) x+ (4i+4) y+5 = 0 with x, y being real and $i = \sqrt{-1}$, then x =____[correct upto one decimal place]

01. Ans: (2.5)

Sol:
$$(3i+1)x + (4i+4)y + 5 = 0$$

 $3i x + x + 4iy + 4y + 5 = 0$
 $(x+4y+5)+i(3x+4j)=0$
 $x+4y+5=0$
 $3x+4y+0=0$
 $-2x+5=0$
 $x=\frac{5}{2}$


02. A project consists of eight activities. The time required for each activity and its immediate predecessor(s) are given in the table below.

Activity	Activity time (in days)	Immediate predecessor(s)
A	2	-
В	3	-
С	2	A
D	4	A, B
Е	4	С
F	3	С
G	X	D,E
Н	2	F,G

If the project completion time using critical path method (CPM) is 15 days, then value of X (in days) is ____. [in integer]

02. Ans: (5)

Sol:



Critical path = A-C-E-G-H Critical Time = 15 Days So, X = 15-2-2-4-2 = 5days

- 03. The dimensionless number defined by the ratio of inertial force to viscous force is called
 - (a) Mach number
 - (b) Froude number
 - (c) Weber number
 - (d) Reynolds number

03. Ans: (d)

Sol: Reynolds number is the ratio of inertial force to viscous force.

04. A 3 mm thick steel sheet, kept at room temperature of 30 °C, is cut by a fiber laser beam. The laser spot diameter on the top surface of the sheet is 0.2 mm. The laser absorptivity of the sheet is 50%. The properties of steel are density = 8000 kg/m³, specific heat = 500 J/kg°C, melting temperature = 1530°C, and latent heat of fusion = 3×10⁵ J/kg. Assume that melting efficiency is 100% and that the kerf width is equal to the laser spot diameter. The maximum speed (in m/s) at which the sheet can be fully cut at 2 kW laser power is

[round off to 3 decimal places]



04. Ans: (0.198)

Sol: Given,

Steel sheet thickness = 3 mm,

Room temperature = $30 \, ^{\circ}$ C,

Laser spot diameter on the top surface of the sheet

= 0.2 mm = kerf width.

Laser absorptivity of the sheet = 50%.

The properties of steel are

density = 8000 kg/m^3 ,

specific heat = $500 \text{ J/kg}^{\circ}\text{C}$,

melting temperature = 1530°C,

latent heat of fusion = 3×10^5 J/kg.

melting efficiency = 100%

laser power = 2 kW

Heat needed per sec to melt steel sheet

 $= \dot{m} L + \dot{m} c_p dT$

Heat supplied by laser = $0.5 \times 2000 \text{ W} = 1000 \text{ W}$

 $1000 = \dot{m} \times (3 \times 10^5) + \dot{m} \times 500 \times (1530 - 30)$


 $\dot{m} = 9.52 \times 10^{-4} \text{ kg/sec}$

 $\dot{m} = \rho AV$

 $V = \frac{9.52 \times 10^{-4}}{8000 \times t \times W} = \frac{9.52 \times 10^{-4}}{8000 \times \frac{3}{1000} \times \frac{0.2}{1000}}$


V = 0.198 m/s


05. A 30 kg smooth, solid sphere rests on two frictionless inclines as shown in the figure. The magnitude of contact force in N acting at the point A is (take acceleration due to gravity g = 9.81 m²s and consider both sphere and inclines to be rigid)______[round off to 2 decimal places]



05. Ans: (147.15)

Sol: FBD at centre of sphere:





Using lami's theorem, $\frac{30 \times 9.81}{\sin 90} = \frac{N_A}{\sin 150}$

 $\therefore N_A = 147.15 \text{ N}$



A NATIONAL LEVEL SCHOLARSHIP TEST FOR ENGINEERS

GATE | ESE | PSUs - 2022 / 2023



ONLINE MODE

- AI based proctoring examination.
- candidates can take the online test from any location using a laptop/ PC with a connected webcam and good internet connection.

LAST DATE FOR ONLINE REGISTRATION

5th MARCH 2021

Get Worth SCHOLARSHIPS

Exam Date: 7th March 2021 Timing: 11:00 AM

No. of Questions: 50

25 Q: 1 Mark | 25 Q: 2 Mark

Total : 75 Marks

Duration: 90 Mins.

Streams: EC | EE | ME | CE | CSIT | IN | PI





APPLICABLE FOR

CLASSROOM COACHING

EXCLUSIVE LIVE BATCHES

DEEP-LEARN (Pre-Recorded Classes)






06. In a shaft-hole assembly, the hole is specified as $30_{0.000}^{0.040}$ mm. The mating shaft has a clearance fit with minimum clearance of 0.01 mm. The tolerance on the shaft is 0.03 mm. The maximum clearance in mm between the hole and the shaft is

(a) 0.04

- (b) 0.10
- (c) 0.08
- (d) 0.05

06. Ans: (c)

Sol:



- 07. An in-control process has an estimated standard deviation of 2 mm. The specification limits of the component being processed are 120 ± 8 mm, When the process mean shifts to 118 mm, the values of the process capability indices, C_p and C_{pk} , respectively are.
 - (a) 1.000, 1.000
- (b) 1.000, 1.667
- (c) 1.333. 1.667
- (d) 1.333, 1.000

07. Ans: (d)

Sol: $\sigma = 2\text{mm}$, USL = 128mm, LSL = 112mm $\overline{X} = 118\text{mm}$ $C_p = \frac{\text{USL} - \text{LSL}}{6\sigma} = \frac{128 - 112}{6 \times 2}$ $= \frac{16}{6 \times 2} = 1.33$ $C_{pk} = \min\left(\frac{\text{USL} - \overline{X}}{3\sigma}, \frac{\overline{X} - \text{LSL}}{3\sigma}\right)$

$$C_{pk} = min\left(\frac{128 - 118}{3 \times 2}, \frac{118 - 112}{3 \times 2}\right)$$

= min (1.67, 1)

$$C_{pk} = 1$$

08. A company manufactures two products P and Q with unit profit of 4 and 5, respectively. The production requires manpower and two kinds of raw materials R1 and R2. The following table summarizes the requirement and availability of resources.

Resource	usage p	ource per unit luction	Amount of resource available
	P	Q	avallable
man power	1	1	10
R1	1	2	18
R2	2	1	18

The maximum profit the company can make is

- (a) 42
- (b) 54
- (c) 48
- (d) 45

08. Ans: (c)

Sol: $Z_{\text{Max}} = 4P + 5Q$

Subjected to

$$P + O \le 10$$

$$P + 2O \le 18$$

$$2P + O \le 18$$

$$P, O \ge 0$$


$$\frac{P}{10} + \frac{Q}{10} \le 1$$

$$\Rightarrow (10,0)(0,10)....(1)$$

$$\frac{P}{18} + \frac{Q}{9} \le 1$$

$$\frac{P}{9} + \frac{Q}{18} \le 1$$





$$0(0,0) \rightarrow Z = 0$$

 $A(0,9) \rightarrow Z = 4 \times 0 + 5 \times 9 = 45$
 $B(2,8) \rightarrow Z = 4 \times 2 + 5 \times 8 = 48$
 $C(8,2) \rightarrow Z = 4 \times 8 + 5 \times 2 = 42$
 $D(9,0) \rightarrow Z = 4 \times 9 + 5 \times 0 = 36$
Maximum Profit = 48

09. A retail chain company has identified four sites A, B, C and D to open a new retail store. The company has selected four factors as the basis for evaluation of these sites. The factors, their weights, and the score for each site are given in the following table.

Factor	Factor	(out of 100)			
	weight	A	В	C	D
Average community income	0.4	60	70	80	50
Demand growth potential	0.1	30	80	50	40
Proximity to existing store	0.3	50	10	40	60
Availability of public transport	0.2	40	30	40	20

The site that should be selected to open the new retail store is

(a) Site A (b) Site D

(c) Site B

(d) Site C

09. Ans: (d)

Sol: Weighted Score of A = $(60 \times 0.4) + (30 \times 0.1) + (50 \times 0.3) + (0.2 \times 40) = 50$

Weighted Score of B = $(70 \times 0.4) + (80 \times 0.1) +$

$$(10 \times 0.3) + (30 \times 0.2) = 45$$

Weighted Score of C = $(80 \times 0.4) + (50 \times 0.1) +$

$$(40 \times 0.3) + (40 \times 0.2) = 57$$

Weighted score of D = $(50 \times 0.4) + (40 \times 0.1) +$

$$(60 \times 0.3) + (20 \times 0.2) = 46$$

Best location is (c), it has highest weighted score.

10. Temperature field inside a sphere of radius R = 1 m with origin at its center is

 $T(x, y, z) = 100-70x + 51y-80z - 10x^2 - 20y^2 - 20z^2$. If thermal conductivity of the sphere material is K = 50 W/mK and Fourier law of heat conduction is valid, net heat leaving the sphere per unit time in W is

[round off to one decimal place]

10. Ans: (*)

- 11. A small capillary tube of 3 mm inner diameter is inserted into a fluid having density 900 kg/m³, surface tension 0.1 N/m, and contact angle 30°. The rise in the height of fluid in the capillary tube due to surface tension is
 - (a) 89.1 mm
- (b) 128.3 mm
- (c) 154.1 mm
- (d) 111.4 mm

11. Ans: (*)

Sol: Capillary rise in tube

$$\begin{split} h &= \frac{4\sigma \cos \theta}{\rho. g. d} \\ h &= \frac{4 \times 0.1 \times \cos 30^{\circ}}{900 \times 9.81 \times 0.003} = 0.01307 m \\ &= 13.09 \ mm \end{split}$$

^{*}No option matched.

UPCOMING BATCHES **a HYDERABAD**

GATE + PSUs – 2022 (REGULAR BATCHES)					
Batch Type	Timings	Batch Date	Duration	Venue & Streams	
	Deib	2 nd & 17 th April 2021		Abida (CCOIT)	
Regular	Daily 4 to 6	1 st & 17 th May 2021	5 to 6 Months	Abids (CS&IT) Dilsukhnagar (EC, EE, IN)	
	Hours	1 st & 17 th June 2021		Kothapet (CE, ME, PI)	
	GAT	E + PSUs - 2022 (FLEXIB	LE BATCHES)		
Flexible	Daily	5 th , 20 th July 2021	3 to 4	Abids (CS&IT)	
Batches	6 to 8		Months	Dilsukhnagar (EC, EE, IN) Kothapet (CE, ME, PI)	
GATE + PSUs – 2022 (SPARK BATCHES)					
	Daily	17 th May 2021	5 to 6	Abids (CE, ME, CS)	
Spark	5 to 8 Hours	1 st & 17 th June 2021	Months	Kukatpally (EC, EE)	
	ESE + G	ATE + PSUs – 2022 (REG	ULAR BATCH	ES)	
	Daily	2 nd & 17 th April 2021			
Regular	Daily 6 to 8	1 st & 17 th May 2021	9 to 10 Months	Kukatpally (EC, EE) Abids (CE, ME)	
	Hours 1 st & 17 th June 2021				
	ESE +	GATE + PSUs – 2022 (SP/	ARK BATCHES	5)	
Control 1	Daily	17 th May 2021	9 to 10	Kukatpally (EC, EE)	

1st & 17th June 2021

Spark

6 to 8

Hours

Kukatpally (EC, EE)

Abids (CE, ME)

Months



12. A company is producing a disc-shaped product of 50 mm thickness and 1.0 m diameter using sand casting process, The solidification time of the above casting process is estimated by Chorinov's equation = $B\left[\frac{V}{A}\right]^2$, where B is the mold constant, and V and A are the volume and surface area of the casting, respectively. It is decided to modify both the thickness and diameter of the disc to 25 mm and 0.5 m, respectively, maintaining the same casting condition. The percentage reduction in solidification time of the modified disc as compared to that of the bigger disc is [round off to one decimal place]

12. Ans: (75)

Sol:
$$t_1 = B(M_1)^2 \rightarrow M_1 = \frac{d_1}{6} = \frac{1}{6} = 0.16 \text{ m}$$

$$t_2 = B(M_2)^2 \rightarrow M_2 = \frac{d_2}{6} = \frac{0.5}{6} = 0.083 \text{ m}$$

$$\frac{t_1}{t_2} = \frac{M_1^2}{M_2^2} \Rightarrow \frac{t_1}{t_2} = \frac{0.16^2}{0.08^2} = 4$$

$$t_1 = 4 \ t_2 \Rightarrow t_2 = 0.25 \ t_1$$

Percentage reduction in solidification time = $\frac{t_1 - t_2}{t_1}$

$$=\frac{t_1-0.25\ t_1}{t_1}=0.75$$

Percentage reduction = 75 %

13. A machine shop has received four jobs A, B, C and D for processing on a single CNC machine. All jobs are available for processing on the first day of the production schedule calendar, and processing times and due dates as applicable on the first day are given below. Using earliest due date rule, the average tardiness (in days) is _____ [in integer]

Job	Processing time (in days)	Due date (day)
A	8	14
В	5	10
С	7	12
D	9	19

13. Ans: (4)

Sol: EDD Rule:

Job	In	Out	Due Date	Lateness	Tardiness
В	0	5	10	-5	0
С	5	12	12	0	0
A	12	20	14	6	6
D	20	29	19	10	10

Avg. Tardiness =
$$\frac{\text{Total Tardiness}}{\text{no. of job}}$$

= $\frac{10+6}{4}$ = 4

Note: Positive lateness is called tardiness.

14. The frequency of pulsing in a die-sinking electric discharge machine (EDM) is 10 kHz, The pulse off-time is set at 40 micro-seconds. The duty factor at this setting is

14. Ans: (b)

Cycle time =
$$\frac{1}{10 \times 10^3}$$
 sec = Total welding time
Pulse off time = 40×10^{-6} sec = RT
Duty factor (or) cycle = $\frac{AOT}{AOT + RT} = \frac{AOT}{TWT}$
TWT = AOT + RT
 $\frac{1}{10 \times 10^3}$ = AOT + 40×10^{-6}
 \Rightarrow AOT = 6×10^{-5} sec
Duty factor = $\frac{6 \times 10^{-5}}{1}$ = 0.6

Sol: Given, $f = 10 \text{ kHz} = 10 \times 10^3 \text{ Hz}$

- 15. In an ideal Otto cycle, 800 kJ/kg is transferred to air during the constant volume heat addition process and 381 kJ/kg is removed during the constant volume heat rejection process. The thermal efficiency in % of the cycle is [round off to one decimal place]
- 15. Ans: (52.4)


Sol:
$$\eta_{Th} = \frac{Q_s - Q_R}{Q_s} = 1 - \frac{Q_R}{Q_s}$$

$$= 1 - \frac{381}{800} = 0.52375 \simeq 52.4\%$$




16. Consider the truss shown in the figure. The members AB, BC, and CA are all rigid and form an equilateral triangle. The contact between roller and ground at C is frictionless. If the self-weight of members is neglected, the force in member BC in N is (negative sign should be used if the force is compressive and positive if the force in the member is tensile)____

[round off to one decimal place]



16. Ans: (-5773.5)
Sol: FBD at joint B:



Using Lami's theorem:

$$\frac{10}{sin300} = \frac{S_{BC}}{sin30}$$

$$S_{BC} = -5.7735 \text{ kN}$$

= -5773.5 N

(Negative sign means compression)

17. In an arc welding process, the DC power source characteristic is linear with an open circuit voltage of 60 V and short circuit current of 600 A. The heat required for melting a metal during the welding is 10 J/mm³, and the heat transfer and melting

efficiencies are 80% and 25%, respectively. If the weld cross-sectional area of 20 mm² is made using the maximum arc power, then the required welding speed in mm/s is _____[round off to one decimal place]

17. Ans: (9)

Sol: Given ,Open circuit voltage $(V_o) = 60 \text{ V}$ Short circuit current $(I_s) = 600 \text{ A}$ $u = \text{Energy required to melt unit volume} = 10 \text{ J/mm}^3$ Heat transfer $(\eta) = 80 \%$ Melting efficiencies $(\eta_m) = 25\%$,

Cross-sectional area, A = 20 mm² Arc power at maximum

$$V = V_0 - \frac{V_0}{I}.I \Rightarrow V = 60 - \frac{60}{600}I$$

$$V = V_0 - \frac{1}{I_s} \cdot I \Rightarrow V = 60 - \frac{30}{600} I$$

$$\therefore V = 60 - 0.1I$$

For Maximum power

$$\frac{dP}{dv} = 0 \Rightarrow \frac{d\{(60 - 0.1I)\}}{dV} = 0$$

Power = VI = $(60 - 0.1 \text{ I}) \text{ I} = 60 \text{ I} - 0.1 \text{ I}^2$ For maximum power $\frac{dP}{dI} = 0$

$$\Rightarrow$$
 60 - 0.2 I = 0 \Rightarrow I = 300 A

$$V = 60 - (0.1 \times I) = 60 - (0.1 \times 300) = 30 \text{ V}$$

$$\nu = \frac{\eta DVI}{uA} \hspace{1cm} \eta = \eta_{_{m}} \times \eta_{_{h}} = 0.8 \times 0.25$$

D = 1 (not given)
V = 30 V, I = 300 A

$$v = \frac{0.8 \times 0.25 \times 1 \times 30 \times 300}{10 \times 20} = 9 \text{ mm/sec}$$

- 18. In a typical product development process under concurrent engineering approach, all elements of product life cycle from conception to disposal are considered at
 - (a) Disposal stage
- (b) Product design stage
- (c) Process design stage
- (d) Manufacturing stage

18. Ans: (b)

College Goe	rs Batch for	GATE & ESE - 2022 / 2023	@ F	lyderabad	
Batch Type	Timings	Batch Date	Duration	Venue	
Morning, Evening Batches	6am to 8am & 6pm to 8:30pm	20 th March 2021	8 to 10 Months	Abids, Dilsukhnagar, Kukatpally.	
GATE + PSU	s – 2022 & E	SE + GATE + PSUs – 2022		@ DELHI	
		5 th March 2021			
Regular	Daily	7 th April 2021	6 to 7	ACE campus	
Batches	5 to 6 Hours	15 th May 2021	Months	Saket	
		5 th June 2021			
GATE + PSU	s – 2022 & E	SE + GATE + PSUs – 2022		@ PUNE	
Regular / Weekend Batches	Daily 5 to 6 Hours	20 th March 2021	6 to 7 Months	Pune Classroom	
GATE + P	SUs – 202	2 & 2023		@ VIZAG	
Weekend Batch	Saturday 2 pm to 8 pm Sunday 9am to 6pm	3 rd April 2021	6 to 7 Months	Vizag Classroom	
GATE + PS	Us – 2022 8	k 2023	@ VI	JAYAWADA	
Weekend Batch	Saturday 2 pm to 8 pm Sunday 9am to 6pm	3 rd April 2021	6 to 7 Months	Vijayawada Classroom	
GATE + PS	Us – 2022		@	TIRUPATI	
Weekend Batch	Saturday 2 pm to 8 pm Sunday 9am to 6pm	20 th March 2021	6 to 7 Months	Tirupati Classroom	




EARLY BIRD OFFER Rs.3,000/- OFF** Register on or before 31st March 2021






19. A cantilever beam of length 0.3 m is subjected to a uniformly distributed load C = 10 kN/m, as shown in the figure. The bending (flexural) rigidity of the beam is 5000 Nm². Neglecting the self-weight of the beam, the magnitude of beam curvature in m⁻¹ at the fixed end is



- (a) 0.05 (b) 0.09
- (c) 0.02
- (d) 1.10

19. Ans: (b)

Sol:



Given data,

Length of beam, L = 0.3 m,

$$EI = 5000 \text{ N.m}^2$$

Maximum bending moment at fixed end = $\frac{\text{wL}^2}{2}$ = $\frac{10 \times 10^3 (\text{N/m}) \times 0.3 (\text{m}) \times 0.3 (\text{m})}{2}$ = $5 \times 0.3 \times 0.3 \times 10^3 \text{ N-m}$

 \therefore curvature at fixed end = ρ

$$= \frac{1}{R} = \frac{M}{EI} = \frac{5 \times 0.3 \times 0.3 \times 10^{3}}{5000}$$
$$= 0.09 \text{ m}^{-1}$$

- 20. The minimum value of function f defined by $f(x, y, z) = x^2 + 5y^2 + 5z^2 4x + 40y 40z + 300$ is ______, [in integer]
- 20. Ans: (136)

Sol:
$$f(x, y, z) = x^2 + 5y^2 + 5z^2 - 4x + 40y - 40z + 300$$
.
 $f_x = 2x - y = 0 \Rightarrow x = 2$
 $f_y = 10y + 40 = 0 \Rightarrow y = -4$
 $f_z = 10z - 40 = 0 \Rightarrow z = 4$

Minimum and maximum value occurs at stationary points $f_x = 0$, $f_y = 0$, $f_z = 0$.

$$f(2,-4,4) = 2^2 + 5(-4)^2 + 5(4)^2 - 4(2) + 40(-4) - 40(4) + 300$$

$$f(2,-4,4) = 136$$

The minimum value of function f(x,y,z) = 136.

- 21. A circular tank of 4 m diameter is filled up to a height of 3 m. Assuming almost steady flow and neglecting losses, the time taken in seconds to empty the tank through a 5 cm diameter hole located at the center of the tank bottom (take acceleration due to gravity $g = 9.81 \text{ m/s}^2$) is [round off to the nearest integer]
 - (a) 8097

(b) 5005


(c) 3154

(d) 1807

21. Ans: (b)

Sol: Given data: D = 4m; H = 3 m

$$d = 5 \text{ cm};$$
 $g = 9.81 \text{ m/s}^2$



$$dt = \frac{d\Psi}{Q} = \frac{-A_{T}dh}{c_{d} \times a\sqrt{2gh}}$$

- ve sign indicates that as time increases, h decreases.

$$\therefore \int_{0}^{t} dt = \int_{0}^{H} \frac{-A_{T}.dh}{C_{d}a\sqrt{2gh}}$$

Simplifying the above equation,

$$\therefore t = \frac{2A_T}{c_d a \sqrt{2g}} \sqrt{H}$$

$$t = \frac{2 \times \frac{\pi}{4} (4)^2}{(1) \left(\frac{\pi}{4} (0.05)^2\right)} \times \frac{\sqrt{3}}{\sqrt{2 \times 9.81}}$$

$$= \frac{2 \times 16}{(0.05)} \times \frac{\sqrt{3}}{\sqrt{2} \times 9.81} = 5005 \text{ sec}$$



ESE GATE | PSU - 2022

New Batches start from

20th **March & 7**th **April** 2021

DISCOUNTS for ESE|GATE|PSUs

- . 25% OFF* for ACE Old Students
- . 20% OFF* for IIT / NIT, Students
- **15% OFF*** for IIIT & Govt. College students

GENCO / TRANSCO DISCOMS

Batch Starts from **22nd Feb 2021**

APPSC / TSPSC

Batch Starts from **16th Feb 2021**

COURSE DETAILS

- For ESE+GATE+PSUs Students
 - 1. Online Live Classes Technical Subjects Only.
 - 2. Recorded Classes General Studies Subjects (on ACE Deep Learn Platform).
- Recorded version of the online live class will be made available through out the course (with 3 times view).
- Doubt clearing sessions and tests to be conducted regularly.
- 3 to 4 hours of live lectures per day in week days (Timing 5 pm to 9 pm) On Sundays 5-6 Hours Live Online Lectures (6 days a week).
- Access the lectures from any where.

Call: 040-23234418/19/20 Email: hyderabad@aceenggacademy.com



22. A single point cutting tool with 15° orthogonal rake angle is used to machine a mild steel plate under orthogonal machining condition. The depth of cut (uncut thickness) is set at 0.9 mm. If the chip thickness is 1.8 mm, then the shear angle in degree is ____ [round off to one decimal place]

22. Ans: (29.0)

Sol: Given,
$$\alpha_0 = 15^{\circ}$$

 $d = 0.9 \text{ mm} = t_0$
 $t_c = 1.8 \text{ mm}$
 $\phi = ?$
 $r = \frac{t_0}{t_c} = \frac{0.9}{1.8} = 0.5$

$$\tan \phi = \frac{r.\cos \alpha_0}{1 - r\sin \alpha_0}$$

$$\tan \phi = \frac{0.5 \times \cos 15^{\circ}}{1 - 0.5 \times \sin 15^{\circ}}$$

$$\tan \phi = \frac{0.482}{0.870}$$
$$\phi = 29.04^{\circ}$$

23. For a given process control chart, there are four rules for determining out-of-control state of the process which are being used simultaneously. The probability of Type-I error for the four rules are 0.005, 0.02, 0.03, and 0.05. Assuming independence of the rules, the probability of overall Type-I error when all the four rules are used simultaneously is

(a) 0.001

(b) 0.201

(c) 0.301


(d) 0.101

23. Ans: (d)

Sol: Overall Type -I error
=
$$1 - [(1 - 0.005)(1 - 0.02)(1 - 0.03)(1 - 0.05)]$$

= 0.101

24. Two cylindrical parts of equal length l, as shown in the figure, made of steel having Young's modulus E = 200 GPa and Poisson's ratio v = 0.33 are press fitted upon one another. If radial interference $\delta = 0.05$ mm, and radii R = 25 mm and $R_o = 40$ mm, then the contact pressure P in MPa at the interface upon press fit is



(a) 10.7

(b) 1005.3

(c)60.9

(d) 121.9

24. Ans: (d)

Sol: Given,

$$E = 200 \text{ GPa}, \quad \mu = 0.33$$

Radial interference $\delta = 0.05 \text{ mm}$

Internal radius R = 25 mm

External radius $R_0 = 40 \text{ mm}$

Considering the shaft to be solid

Interface pressure
$$\begin{split} P &= \frac{E\delta}{2R} \bigg[1 - \frac{R^2}{R_\circ^2} \bigg] \\ &= \frac{200 \times 10^3 \times 0.05}{2 \times 25} \bigg[1 - \bigg(\frac{25}{40} \bigg)^2 \bigg] \end{split}$$

$$P = 121.875 \text{ MPa}$$

25. A given steel has identical yield strength of 700 MPa in uni-axial tension and uni-axial compression. If the steel is subjected to pure shear stress such that the three principal stresses are $\sigma_1 = \sigma$, $\sigma_2 = 0$, $\sigma_3 = 0$



-σ with $\sigma_1 \ge \sigma_2 \ge \sigma_3$, then the stress σ in MPa for the initiation of plastic yielding in the steel as per von Mises yield criterion is _____ [round off to 2 decimal places]

25. Ans: (404.15)

Sol: Given data

(i)
$$\sigma_1 = \sigma$$
; $\sigma_2 = 0$ and $\sigma_3 = -\sigma$
 $\sigma_3 = -\sigma$

(ii) Von-mises stress,

$$\sigma_{vm} = \left\{ \frac{1}{2} \times \left\{ (\sigma_1 - \sigma_2)^2 + (\sigma_1 - \sigma_3)^2 + (\sigma_2 - \sigma_3^2) \right\} \right\}^{\frac{1}{2}}$$

$$\therefore \sigma_{vm} = \left\{ \frac{1}{2} \times \left\{ (\sigma - 0)^2 + (\sigma - (-\sigma))^2 + (0 - (-\sigma)^2) \right\} \right\}^{\frac{1}{2}}$$

$$\therefore \sigma_{vm} = \sqrt{3} \times \sigma$$

(iii) As per von-mises criterion for yielding,

$$\sigma_{vm} \ge s_{yt}$$

$$\therefore \sigma_{vm} = s_{yt}$$

$$\therefore \sqrt{3} \times 6 = 700$$

$$\therefore \sigma = 404.145 \text{ MPa}$$

26. The probability mass function P(x) of a discrete random variable X is given by $P(x) = \frac{1}{2^x}$, where $x = 1, 2, ..., \infty$. The expected value of X is ______ [in integer]

26. Ans: (2)

Sol:
$$P(x) = \frac{1}{2^x}$$

 $E(x) = \sum_{i=1}^{\infty} x_i . p(x_i)$
 $= \sum_{i=1}^{\infty} x(\frac{1}{2^x}) = \sum_{i=1}^{\infty} x(\frac{1}{2})^{x-1}(\frac{1}{2})$
 $= \frac{1}{2} \sum_{i=1}^{\infty} x(\frac{1}{2})^{x-1}$

$$\therefore \sum_{x=1}^{\infty} x a^{x-1} = \frac{1}{(1-a)^2}$$
$$= \frac{1}{2} \left(\frac{1}{(1-\frac{1}{2})^2} \right)$$
$$= \frac{1}{2} \left[\frac{4}{1} \right]$$

()

E(x) = 2

27. Values of function y(x) at discrete values of x for $0 \le x \le 10$ are given in table.

X	0	1	2	3	4	5	6	7	8	9	10
y(x)	5	3	0	-5	-10	-6	0	5	11	18	30

Using trapezoidal rule, $\int_{0}^{10} y(x)dx =$

[round off to one decimal place]

27. Ans: (33.5)

Sol: Given that

$$h = \frac{b-a}{h} = \frac{10-0}{10} = 1$$

$$\int_{a}^{b} y(x) dx = \frac{h}{2} [(y_0 + y_n)] + (y_1 + y_2 + y_3 + \dots + y_{n-1})$$

$$= \frac{1}{2} [(5+30) + 2[3+0-5-10-6+0+5+11+18]]$$

$$= \frac{1}{2} [35+2[16]] = \frac{35+32}{2} = 33.5$$

- 28. Which one of the following is NOT a measure of forecast error?
 - (a) Mean absolute deviation (MAD)
 - (b) Mean absolute percent error (MAPE)
 - (c) Mean sum product error (MSPE)
 - (d) Mean squared error (MSE)
- 28. Ans: (c)

- **Q** 040-40044403, 040-23234420
- acepostalcoaching@gmail.com







ESE | GATE | PSUs

PSCs

ACE Engineering Academy, the leading institute for GATE, ESE and PSUs offers postal coaching (Distance learning programme) for engineering students.

ACE PUBLICATIONS







































ELECTRICAL



























- 29. The time to pass through a security screening at an airport follows an exponential distribution. The mean time to pass through the security screening is 15 minutes. To catch the flight, a passenger must clear the security screening within 15 minutes. The probability that the passenger will miss the flight is ____ [round off to 3 decimal places]
- 29. Ans: (0.37)
- 30. A product has an exponential time-to-failure distribution with a constant failure rate of 0.00006 per hour. The reliability of the product after 4000 hours of operation is
 - (a) 0.7866
- (b) 0.6866
- (c) 0.8866
- (d) 0.5866

30. Ans: (a)

Sol:
$$R(t) = e^{-\lambda t}$$

= $e^{-0.00006 \times 4000}$
= 0.7866

- 31. Which one among the following mechanisms is NOT used for transforming rotation to translation in machine tools?
 - (a) Screw-nut system
 - (b) 4-bevel gear type differential mechanism
 - (c) Whitworth mechanism
 - (d) Cam and cam follower system

31. Ans: (b)

Sol: Differential mechanisms consisting of bevel gears. These mechanisms are widely used in automobiles to provide different rotational speeds to the wheels powered by a single source. This is essential for the functioning of an automobile because, while tackling a turn, the outer wheel of the automobile must rotate faster than the inner wheel. This mechanism is also widely used in machine tools on account of its compactness.

- 32. The eigenvalues of matrix $A = \begin{bmatrix} 8 & 3 \\ 2 & 7 \end{bmatrix}$ are 5 and 10. For matrix $B = A + \alpha I$, where α is a constant and I is 2×2 identify matrix, its eigenvalues are
 - (a) 5, 10
- (b) 5α , 10α
- (c) 5α , 10α
- (d) $5 + \alpha$, $10 + \alpha$

32. Ans: (d)

Sol:
$$A = \begin{bmatrix} 8 & 3 \\ 2 & 7 \end{bmatrix}$$

Eigen value = 5, 10

$$B = A + \alpha I = \lambda + \alpha (1)$$

when
$$\lambda = 5$$

$$\Rightarrow$$
 5 + α (1) = 5 + α .

when
$$\lambda = 10$$

$$\Rightarrow 10 + \alpha(1) = 10 + \alpha$$
.

- 33. There are a number of identical components in a parallel system. When the system reliability is 0.97 and the reliability of each individual component is 0.68, the number of identical components in the system is (if actual value is a fraction, it may be rounded up to the next higher integer).
 - (a) 6
- (b) 4
- (c) 8
- (d) 2

33. Ans: (b)

Sol:
$$R_{parallel} = 1 - (1 - R_c)^n$$

 $R_{Parallel} = 0.97$
 $R_c = 0.68$
 $0.97 = 1 - (1 - 0.68)^n$
 $\Rightarrow 0.03 = (0.32)^n$
 $\ln (0.03) = n \ln (0.32)$
 $n = \frac{\ln (0.03)}{\ln (0.32)} = 3.07 \approx 4$



COURSE DETAILS

- Experienced and erudite faculty from ACE Hyd.
- Focussed and relevant
- Structured online practice tests.
- Regular doubt clearing sessions.
- 5 to 6 Hours lectures per day (5-7 Days a week)

APPSC / TSPSC

Starts from: 16th Feb, 2021

GENCO / TRANSCO / DISCOMs

Starts from: 22nd Feb, 2021

MPSC MAINS

Starts from: 5th April, 2021

KPSC / KPWD

SSC JE (GS)

OPSC

BPSC



34. A 150 mm wide polyamide flat belt is transmitting 15 kW power through a belt-pulley system. The driving pulley of 150 mm pitch diameter is rotating at 200 RPM. If F_1 is the belt tension on high tension side, and F_2 is the belt tension on low tension side, then the difference in belt tensions $\Delta F = F_1 - F_2$ in N is ______. (round off to one decimal place)

34. Ans: (9549.3)

Sol: (i)
$$P = 15 \text{ kW}$$
, $d = 150 \text{ mm} = 0.15 \text{ m}$ $N = 200 \text{ rpm}$

(ii) For belt drive,

$$P = \frac{2\pi N}{60} \times \{F_1 - F_2\} \times \frac{d}{2}$$
$$\therefore 15 \times 10^3 = \frac{2\pi \times 200}{60} \times \Delta F \times \frac{0.15}{2}$$

$$\therefore \Delta F = 9549.3 \text{ N}$$

- 35. 'GO' and 'NO GO' snap gauges are to be designed for a shaft 36.000^{+0.070}_{+0.010} mm. Gauge tolerance can be taken as 5% of the hole tolerance. Following the ISO system of gauge design, the respective sizes of 'GO' and 'NO GO' gauges are
 - (a) 36.018 mm and 36.062 mm
 - (b) 36.013 mm and 36.067 mm
 - (c) 36.020 mm and 36.060 mm
 - (d) 36.015 mm and 36.065 mm

35. Ans: (b)

36. Match the component with the corresponding manufacturing process in the table below.

	Component		Manufacturing process
P	Aluminum alloy piston for IC engine	1	Blow molding
Q	Low carbon steel oil pan	2	Powder metallurgy
R	Tungsten carbide cutting tool insert	3	Sand casting
S	Plastic bottle	4	Deep drawing

- (a) P-1, Q-3, R-2, S-4
- (b) P-3, Q-2, R-1, S-4
- (c) P-3, Q-4, R-2, S-1
- (d) P-2, Q-3, R-4, S-1

36. Ans: (c)

Sol: In permanent-mold casting (also called hard-mold casting), two halves of a mold are made from materials with high resistance to erosion and thermal fatigue, such as cast iron, steel, bronze, graphite, or refractory metal alloys. Typical parts made are automobile pistons, cylinder heads, connecting rods, gear blanks for appliances, and kitchenware. Deep drawing is used make low carbon oil pans.

Powder metallurgy is used for manufacturing products or articles from powdered metals by placing these powders in molds and are compacting the same using heavy compressive force. Typical examples of such article or products are grinding wheels, filament wire, magnets, welding rods, tungsten carbide cutting tools, self-lubricating bearings electrical contacts and turbines blades having high temperature strength.

Blow molding (or moulding) is a manufacturing process for forming and joining together hollow plastic parts. It is also used for forming glass bottles or other hollow shapes.

♦ Descriptive Questions for ESE Mains

Batch Starts from:

22nd Feb 2021

Duration:

3 to 4 Months

Discount:

Rs.5,000/- OFF

for ACE old students

COURSE HIGHLIGHTS

- Experienced and erudite faculty members.
- Recorded version of the online live class will be made available through out the course (with 3 times view).
- Doubt clearing sessions and tests to be conducted regularly.
- 5 to 6 hours of live lectures per day.
- Access the lectures from any where.
- Focussed and relevant study material.

To Win the R**ACE**.. Join **ACE**..



37. Heat is being removed from a refrigerator at a rate of 300 kJ/min to maintain its inside temperature at 2°C. If the input power to the refrigerator is 2 kW, the coefficient of performance of the refrigerator is [round off to one decimal place]

37. Ans: (2.5)

Sol: NRE =
$$\dot{Q} = \frac{300}{60} = 5 \text{ kW}$$

W = 2 kw
 $COP = \frac{\dot{Q}}{W} = \frac{5}{2} = 2.5$

- 38. Pearlite microstructure in an eutectoid steel consists of alternating layers of two phases, namely α ferrite and
 - (a) Cementite
- (b) Martensite
- (c) Austenite
- (d) Bainite

- 38. Ans: (a)
- Sol: Pearlite is a two-phased, lamellar (or layered) structure composed of alternating layers of ferrite (87.5 wt%) and cementite (12.5 wt%) that occurs in some steels and cast irons.
- 39. A fluid with dynamic viscosity $\mu = 1$ Pa.s is flowing through a circular pipe with diameter 1 cm. If the flow rate (discharge) in the pipe is 0.2 liter/s, the maximum velocity in m/s of the fluid in the pipe is (assume fully developed flow and take fluid density $\rho = 1000 \text{ kg/m}^3$) ____ [round off to one decimal place]
- 39. Ans: (5.1)

Sol: Given,

$$\mu = 1 \text{ Pa. sec},$$

$$d = 0.01 \text{ m}$$

 $Q = 0.0002 \text{ m}^3/\text{sec},$

$$\rho = 1000 \text{ kg/m}^3$$

$$V_{\text{max}} = ?$$

$$O = AV$$

$$Q = \frac{\pi}{4} d^2.V$$

Reynolds number (Re) =
$$\frac{\rho \cdot V \cdot d}{\mu}$$

= $\frac{\rho \cdot 4Q \times d}{\pi d^2 \times \mu}$
= $\frac{4 \cdot \rho \cdot Q}{\pi \cdot d \cdot \mu}$
= $\frac{4 \times 1000 \times 0.0002}{\pi \times 0.01 \times 1}$

= 25.46 < 2000

Flow through the pipe is Laminar
$$Q = A\overline{V} = A. \frac{V_{max}}{2} \quad \left[V_{max} = 2\overline{V}\right]$$

$$\therefore \overline{V} = \frac{V_{\text{max}}}{2}$$

 $V = 4O/\pi d^2$

$$0.0002 = \frac{\pi}{4} (0.01)^2 \times \frac{V_{max}}{2}$$

$$\therefore V_{max} = 5.093 \text{ m/s}$$

40. In the classical economic order quantity (EOQ) model, let O and C denote the optimal order quantity and the corresponding minimum total annual cost (the sum of the inventory holding and ordering costs). If the order quantity is estimated incorrectly as Q' = 2Q, then the corresponding total annual cost C' is

(a)
$$C' = 1.25C$$

(b)
$$C' = 1.75C$$

(c)
$$C' = 1.5C$$

(d)
$$C' = 2C$$

- 40. Ans: (a)
- **Sol:** Economic Order Quantity, EOQ = Q

optimal
$$cost = C$$

$$(TVC)_{EOQ} = \sqrt{2ACSI}$$

Ordering cost (OC) =
$$\frac{A}{O}$$
S

Inventory carrying cost (ICC) = $\frac{Q}{2}$ CI

At EOQ,
$$OC = ICC$$

At
$$EOQ = C = 2OC = 2ICC$$

Quantity =
$$Q' = 2Q$$

$$OC = \frac{A}{2O}S$$



$$ICC = \frac{2Q}{2}CI$$

$$C' = \frac{1}{2}OC + 2 \times ICC$$

$$C' = 2.5 OC = 2.5 ICC$$

$$\frac{C'}{C} = \frac{2.5 OC}{2 OC} = \frac{2.5 ICC}{2 ICC} = 1.25$$

$$C'=1.25C$$

41. A M30 bolt needs to be subjected to pretension $F_i = 350$ kN. If the torque coefficient K of the bolt is 0.2, then the torque in Nm needed to achieve this pretension is _____ [in integer]


41. Ans: (2100)

Sol: Given data:

- i) M30 bolt \therefore d = 30 mm
- ii) Initial tightening Load, F_i = 350 kN
- iii) Torque coefficient, K = 0.2

Torque required for pretension = $K \times F_i \times d$ = $0.2 \times 350 \times 10^3 \times 30 \times 10^{-3}$ = 2100 Nm

42. In a point-to-point open-loop NC drive, a stepper motor with 1.8° step angle is coupled to a leadscrew through a gear reduction of 4:1 (4 rotations of the motor enables 1 rotation of leadscrew). The single-start leadscrew has a pitch of 4 mm. The worktable of the system is driven by the leadscrew. If the table moves at a uniform speed of 10 mm/s, the pulse frequency (in Hz) required to drive the stepper motor is ______ [round off to one decimal place]



42. Ans: (2000)

Sol: Given, Step angle = 1.8°

Gear reduction = 4:1

Pitch, P = 4 mm

Table speed = 10 mm/s

∴ Pulse frequency (Hz) = ? ∴ $\frac{\text{Total number of steps}}{\text{rotation}} = \frac{360^{\circ}}{1.8^{\circ}}$

 $\frac{\text{Steps}}{\text{rotation}} = \frac{200 \text{ steps}}{\text{rotation}}$

∴ 200 Pulses required for 1 rotation of motor

PulsesDistance (work table)200 $1/4 \times 4 = 1 \text{ mm}$ Pulses10 mm

- :. Pulses = $200 \times 10 = 2000 \text{ Pulses}$
- ∴ Frequency = 2000 Hz
- 43. Which one of the following defects is NOT associated with welding processes?
 - (a) Hydrogen embrittlement (b) Angular distortion
 - (c) Earring
- (d) Hot tear

43. Ans: (c)

- **Sol:** Earing is one of the major defects observed during deep drawing process due to anisotropic nature of sheet metal.
- 44. Match the measuring feature with the corresponding measuring instrument in the table below.

		Measuring feature		Measuring instrument
	P	Flatness error of a	1	Auto collimator
		surface plate		
	Q	Profile of a cam	2	Tool maker's
				microscope
	R	Alignment error of a	3	Dividing head and
		machine tool slide way		dial gauge
	S	Pitch and angle errors of	4	Optical
		screw thread		interferometer



(a) P-4, O-1, R-2, S-3

(b) P-4, O-3, R-1, S-2

(c) P-2, O-4, R-3, S-1

(d) P-1, O-3, R-4, S-2

44. Ans: (b)

Sol:

- The optical interferometer is used for checking flatness between gauge surfaces.
- Dividing head and dial gauges are used to measure the profile of a cam.
- Autocollimators are used for the measurement of straightness and flatness of machine parts and accessories such as guideways, machine tables, surface plates as well as for the assessment of parallelism of machine slide movement with respect to guideways.
- Applications of Tool Maker's Microscope
 - It is used in shop floor inspection of screw threads, gears, and other small machine parts.
 - Its application includes precision measurement of test tools in tool rooms.
 - It helps determine the dimensions of small holes, which cannot be measured with micrometers and callipers.
 - → It facilitates template matching inspection. Small screw threads and involute gear teeth can be inspected using the optional template reticles.
 - → It enables inspection of tapers on small components up to an accuracy of 6°.
- 45. The top layer of a flat $750 \text{ mm} \times 300 \text{ mm}$ rectangular mild steel plate is to be machined with a single depth of cut using a shaping machine. The plate has been fixed by keeping 750 mm side along the tool travel direction. If the approach and the over-travel are 25 mm each, average cutting speed is 10 m/min, feed rate is 0.4 mm/stroke, and the ratio of return time to cutting time of the tool is 1:2, the time (in minutes) required to complete the machining operation is [round off to one decimal place]

45. Ans: (90)

Sol: $M = \frac{1}{ORR} = \frac{1}{2} = 0.5$

Total m/c time = $\frac{W}{f} \left(\frac{L}{V_c} \right) (1 + M)$

$$= \frac{300}{0.4} \times \frac{800}{10000} (1 + 0.5) = 90 \text{ min}$$

 $\therefore L = l_a + l + l_c$

L = 25 + 750 + 25 = 800 mm

 $V_c = 10 \text{ m/min} = 10000 \text{ mm/min}$

F = 0.4 mm/stroke

Total machining time = 90 min

46. A 3.5 mm thick sheet is rolled using a two high rolling mill to reduce the thickness under plane strain condition. Both rolls have a diameter of 500 mm and are rotating at 200 RPM. The coefficient of friction at the sheet and roll interface is 0.08, and the elastic deflection of the rolls is negligible. If the mean flow strength of the sheet material is 400 MPa, then the minimum possible thickness (in mm) of sheet that can be produced in a single pass is [round off to 2 decimal places]

46. Ans: (1.9)

Sol: Given, $H_0 = 3.5 \text{ mm}, D = 500 \text{ mm}$ $N = 200 \text{ rpm}, \ \mu = 0.08$ $H_{l(min)} = ?$, $\bar{Y}_f = 400 \text{ MPa}$ $H_{1(min)} = H_0 - (\Delta H)_{max}$

$$= 3.5 - 0.08^2 \times 250$$
$$= 3.5 - 1.6$$

 $= H_0 - \mu^2 R$

= 1.9 mm

- 47. In a turning operation, doubling the cutting speed (V) reduces the tool life (T) to $\frac{1}{8}$ th of the original tool life. The exponent n in the Taylor's tool life equation, $VT^n = C$ is
- (a) $\frac{1}{3}$ (b) $\frac{1}{8}$ (c) $\frac{1}{2}$ (d) $\frac{1}{4}$





Starts from: 1st July 2020

No. of Tests: 44

+

Free 30 Practice Tests of ESE - 2020 Online Test Series

Total Tests: 74

Note: GATE 2020 & ESE 2020 (Prelims) Online Test Series are available now.

MPSC PRELIMS 2020 | SSC-JE (Paper-II) MAINS 2019 KPSC (Asst. Engineer) | AAI

TEST SERIES HIGHLIGHTS

- Detailed Solutions are Available.
- Video Solutions are Available for Difficult Questions.
- All India rank will be given for each test.
- Comparison with all India toppers of ACE student.

TEST WISE STATISTICS:








QUESTION WISE STATISTICS:







Phone No.: 040-48539866, 040-40136222 | Email: Testseries@aceenggacademy.com



47. Ans: (a)

Sol: $VT^n = C$ (i)

$$2V(\frac{1}{8}T)^n = C$$
(ii)

$$\left(\frac{1}{8}\right)^n = \frac{1}{2}$$


$$n \ln \left(\frac{1}{8}\right) = \ln \left(\frac{1}{2}\right)$$

$$n = \frac{1}{3}$$

- 48. A tool of an NC machine has to move along a circular arc from (20,20) to (10,10), while performing an operation. The center of the arc is at (20,10). Which one of the following NC tool commands performs the above mentioned operation?
 - (a) N020 G03 X20 Y20 X10 Y10 R10
 - (b) N020 G01 X20 Y20 X10 Y10 R10
 - (c) N020 G02 X20 Y20 X10 Y10 R10
 - (d) N020 G02 X10 Y10 X20 Y20 R10

48. Ans: (a)

Sol:



$$R = 10$$

.: NO20 G03 X20 Y20 X10 Y10 R10

- 49. The initial cost of a machine is INR 10,00,000 and its salvage value after 10 years of use is INR 50,000. Using the straight line depreciation method, the book value in INR of the machine at the end of 7th year is _____ [in integer]
- 49. Ans: (3,35,000)
- Sol: Straight line Method

 Depreciation Cost Salvage value

 Life time

Cost = 10 Lakh, Salvage value = 50,000.

Life time = 10 years.

Depreciation =
$$\frac{10^6 - 50,000}{10} = 95000$$

All the end of 7th year, the total depreciated value = $95000 \times 7 = 665000$.

So, book value at the end of 7th year

$$= 10,00,000 - 6,65,000 =$$
Rs $3,35,000$

- 50. When acceptance number of a single sampling plan under attribute category is zero with sample size less than or equal to 10, the Operating Characteristic (OC) curve is
 - (a) A vertical line
 - (b) A horizontal line
 - (c) A convex function
 - (d) An inverted S-shaped curve

50. Ans: (c)

51. A wire of 5 mm diameter is drawn into a wire of 4 mm diameter through a conical die at a constant pulling speed of 5 m/s. Neglecting the coefficient of friction and redundant work, the drawing stress (σ_d) in MPa for the above process is given by $\sigma_d = \overline{\sigma} \ln \left[\frac{1}{1-r} \right]$, where $\overline{\sigma}$ is the mean flow strength of wire material in MPa, and r is the ratio of decrease in area of cross-section to initial area of cross-section of the wire. If the mean flow strength of wire material is 600 MPa, then the power required in kW in the above wire drawing process is _____ [round off to 2 decimal places]



51. Ans: (16.82)

Sol: Given, $d_0 = 5$ mm, $d_1 = 4$ mm

$$r = \frac{A_0 - A_1}{A_0} = 1 - \frac{A_1}{A_0}$$

$$r = 1 - \frac{\frac{\pi}{4}(4)^2}{\frac{\pi}{4}(5)^2}$$

$$r = 1 - \left(\frac{4^2}{5^2}\right)$$
$$r = 0.36$$

$$\sigma_{\rm d} = \overline{\sigma} \times \ell n \left(\frac{1}{1-r} \right)$$

$$\sigma_{\rm d} = 600 \times \ell n \bigg(\frac{1}{1-0.36}\bigg)$$

$$\sigma_{\rm d} = 267.77 \, \text{MPa}$$

$$\therefore$$
 drawing load = $\sigma_d \times A_f$

$$= 267.77 \times \frac{\pi}{4} \times 4^2 = 3364.92 \text{ N}$$

$$\therefore \text{ Drawing power} = 3364.92 \times 5 \text{ m/sec}$$
$$= 16.82 \text{ kW}$$

52. A cylindrical mild steel tensile test specimen of gauge length 50 mm and diameter 10 mm is extended in two stages at a deformation speed of 4 mm/min. The specimen is extended from 50 mm to 55 mm in the first stage, and from 55 mm to 60 mm in the second stage. Neglecting elastic deformation, the total longitudinal true strain is [round off to 2 decimal places]

52. Ans: (0.182)

Sol: Given, $L_0 = 50 \text{ mm}$, $d_0 = 10 \text{ mm}$ $L_1 = 55 \text{ mm}$, $L_2 = 60 \text{ mm}$

$$d_0 = 10 \text{ mm}$$

$$L_1 = 55 \text{ mm},$$

$$L_2 = 60 \text{ m}$$

$$\therefore \ \epsilon_{\mathrm{True}} = \ell n \left(\frac{L_2}{L_0} \right)$$

$$\varepsilon_{\rm True} = \ell_n \left(\frac{60}{50} \right)$$

Total longitudinal true strain, $\varepsilon = 0.182$

53. A time study is carried out for a spot welding operation which is being performed by an operator. The time taken (in seconds) for five observations are recorded as 40, 35, 45, 37 and 43, respectively. If the standard time and the allowance for this operation are 45 seconds and 9 seconds respectively, then the performance rating (in percentage) of the operator is [in integer]

53. Ans: (90)

Sol: Standard time

= Mean observed time × Rating factor + Allowance Standard Time = 45 sec.

Allowance = 9 sec.


Mean observed Time

$$=\frac{40+35+45+37+43}{5}=40 \sec .$$

 \Rightarrow 45 = 40 × Rating Factor + 9

Rating Factor = 90%.

54. A circular rod of length l = 2 m is subjected to a compressive load P, as shown in the figure. The bending (flexural) rigidity of the rod is 2000 Nm². If both ends are pinned, then the critical load P_{cr} in N (rounded to the nearest integer) at which the rod buckles elastically is



(a) 1238

(b) 2000


(c) 5167

(d) 4935



54. Ans: (d)

Sol:



$$(L_e)_{HINGE, HINGE} = L = 2 M$$

$$EI = 2000 \text{ N-m}^2$$

$$P_{\rm e} = \frac{\pi^2 E I_{\rm min}}{L_{\rm e}^2}$$

$$P_{\rm e} = \frac{\pi^2 \times 2000}{2^2}$$

$$P = 4934.80 \text{ N} \simeq 4935 \text{ N}$$

$$p = 4935 \text{ N}$$

- 55. Which one of the following is an improvement type heuristic algorithm for computerized layout design technique?
 - (a) Computerized relationship layout planning (CORELAP)
 - (b) Computerized relative allocation of facilities technique (CRAFT)
 - (c) Systematic layout planning (SLP)
 - (d) Plant layout analysis and evaluation technique (PLANET)

55. Ans: (b)

Sol: CRAFT is the improvement algorithm which is used in plant layout.



Hearty Congratulations to our

ESE - 2019 TOP RANKERS





ELECTRICAL ENGINEERING







MECHANICAL ENGINEERING

CIVIL ENGINEERING

and many more...

Total Selections in Top 10

EE:9 E&T:8 ME:9 CE:7



Hearty Congratulations to our

GATE - 2020 TOP RANKERS









































































































































and many more...

Total Selections in Top 10

58

EC:9 ME:7 CE:7 IN:6 PI:9 XE:4